



06.10.20 12:14

CSCI 150

Introduction to Digital and Computer System Design

Lecture 2: Combinational Logical Circuits IV



Jetic Gū
2020 Fall Semester (S3)

Overview

- Focus: Boolean Algebra
- Architecture: Combinatory Logical Circuits
- Textbook v4: Ch2 2.4, 2.5; v5: Ch2 2.4, 2.5
- Core Ideas:
 1. Boolean Algebra III: K-Map

Boolean Algebra I&II

- AND, OR, NOT Operators and Gates
 - Simple digital circuit implementation
 - Algebraic manipulation using Binary Identities
- Standard Forms
 - Minterm & Maxterm
 - Sum of Products & Product of Sums


Boolean Algebra III: K-Map

Cost Criteria;
Map and Map Manipulation

K-Map


- Karnaugh Map, or just K-Map
- For optimising 2-4 variable boolean expressions
- Skip: 5,6 variable K-Maps can also be drawn but are not very intuitive to use

Two Variable Maps

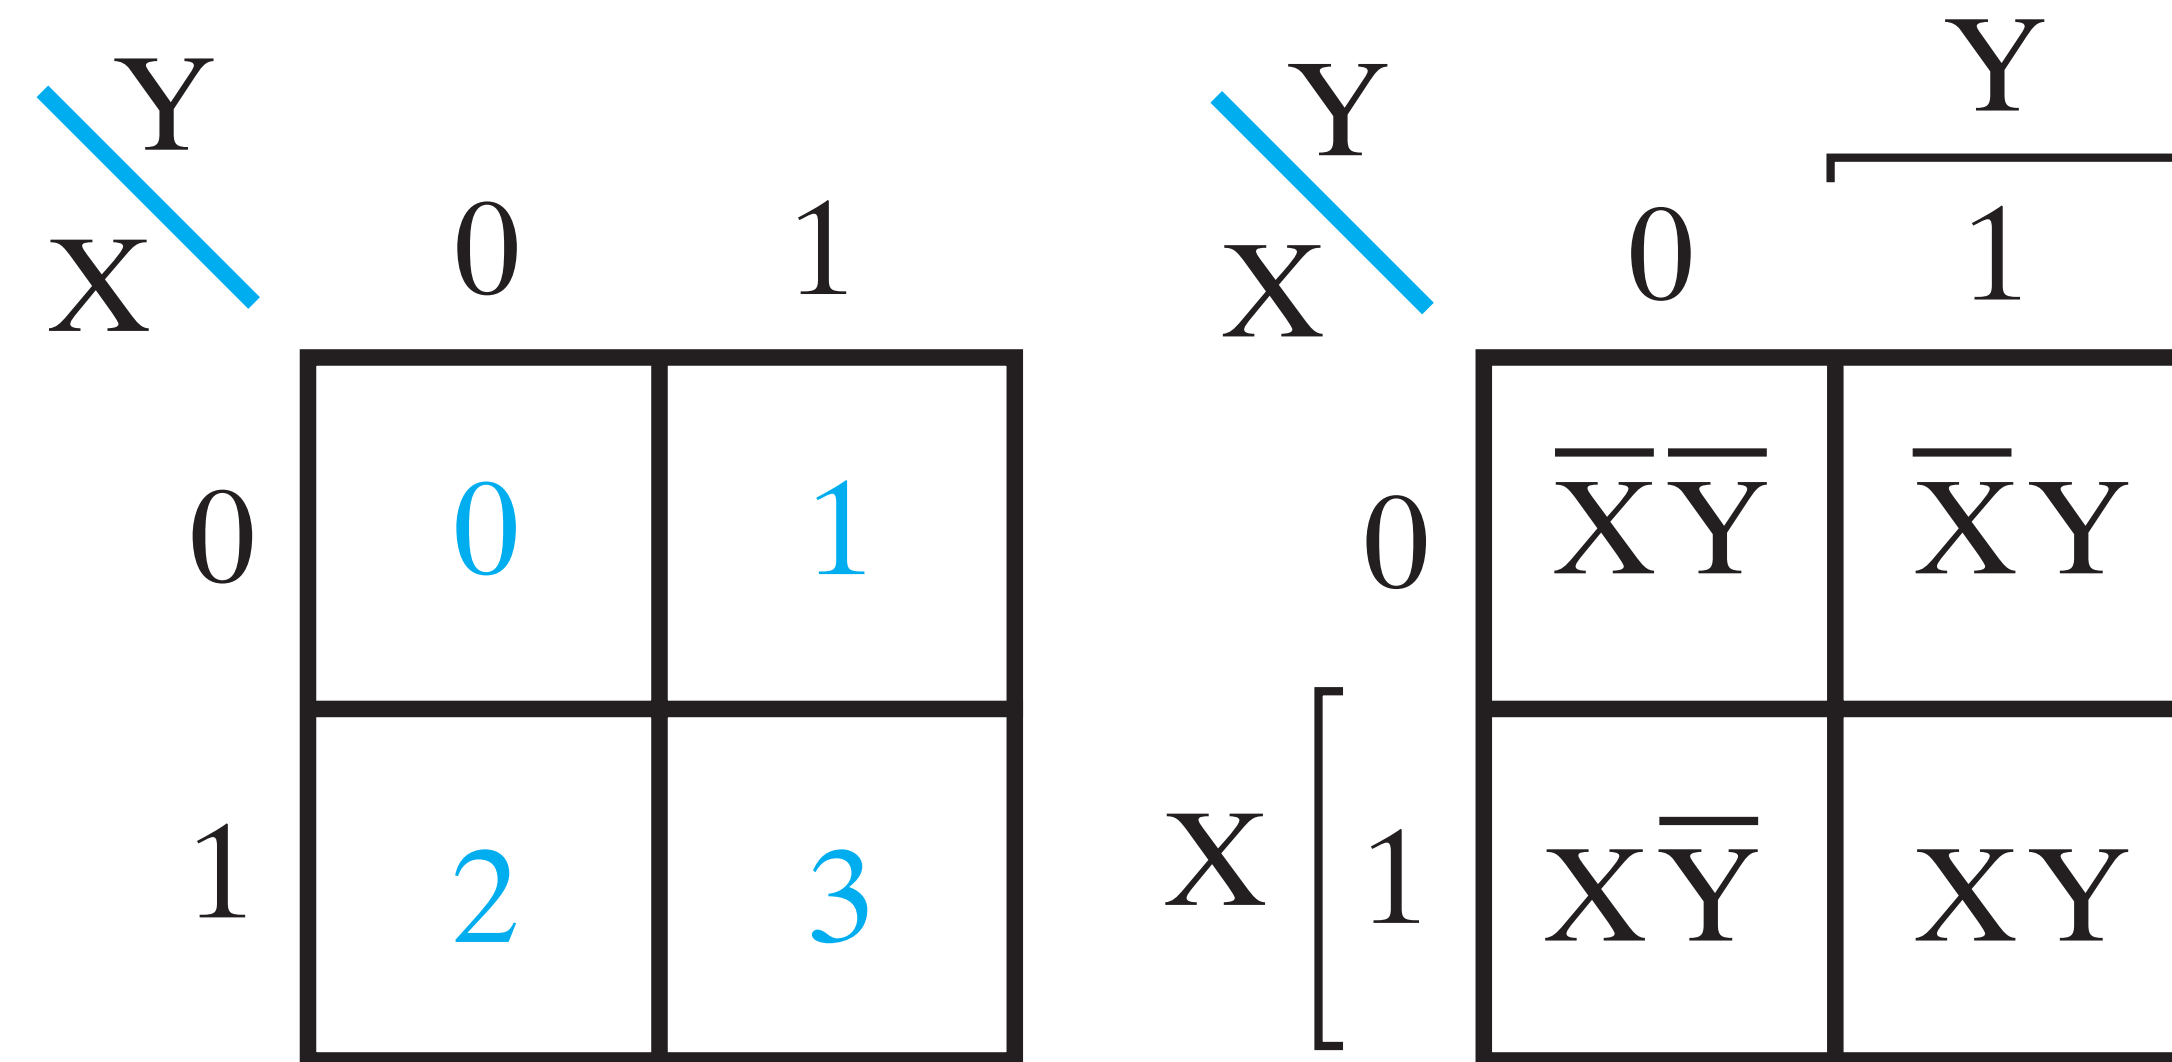


- Number of squares in each map is equal to the number of minterms for the same number of variables, light blue digit above is the index (of minterm)
- Two squares are adjacent if they only differ in one variable
- Binary value inside at each position indicates the truth table value for that term

Three Variable Maps

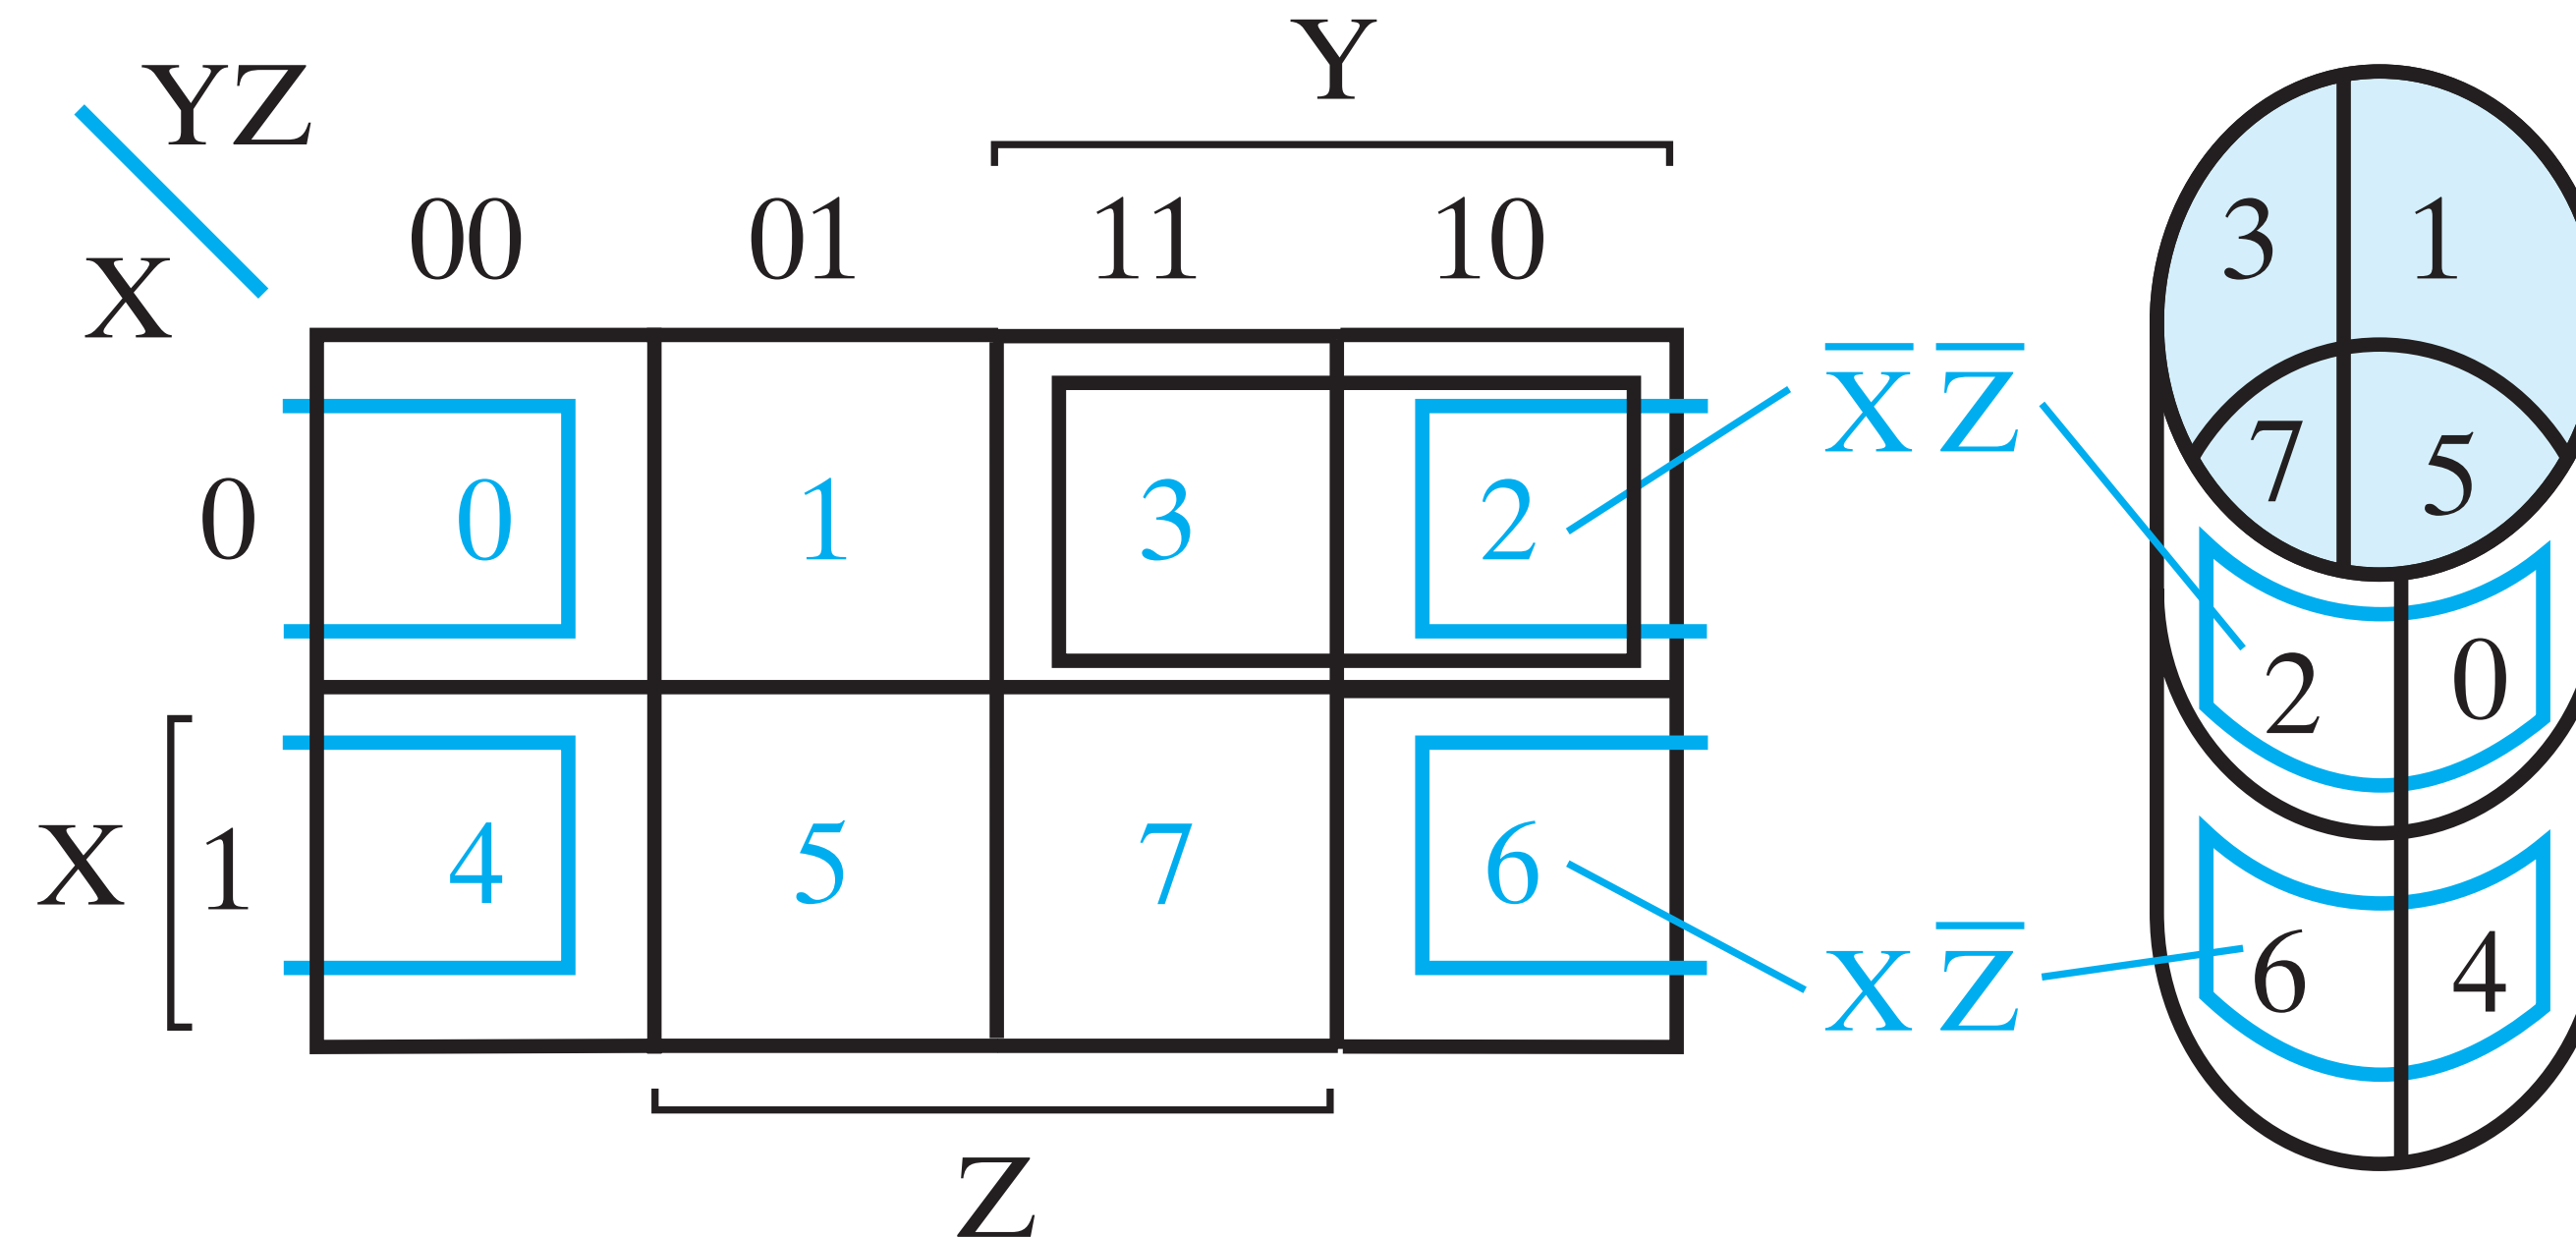

- Number of squares in each map is equal to the number of minterms for the same number of variables, light blue digit above is the index (of minterm)
- Two squares are adjacent if they only differ in one variable
- Binary value inside at each position indicates the truth table value for that term

Four Variable Maps

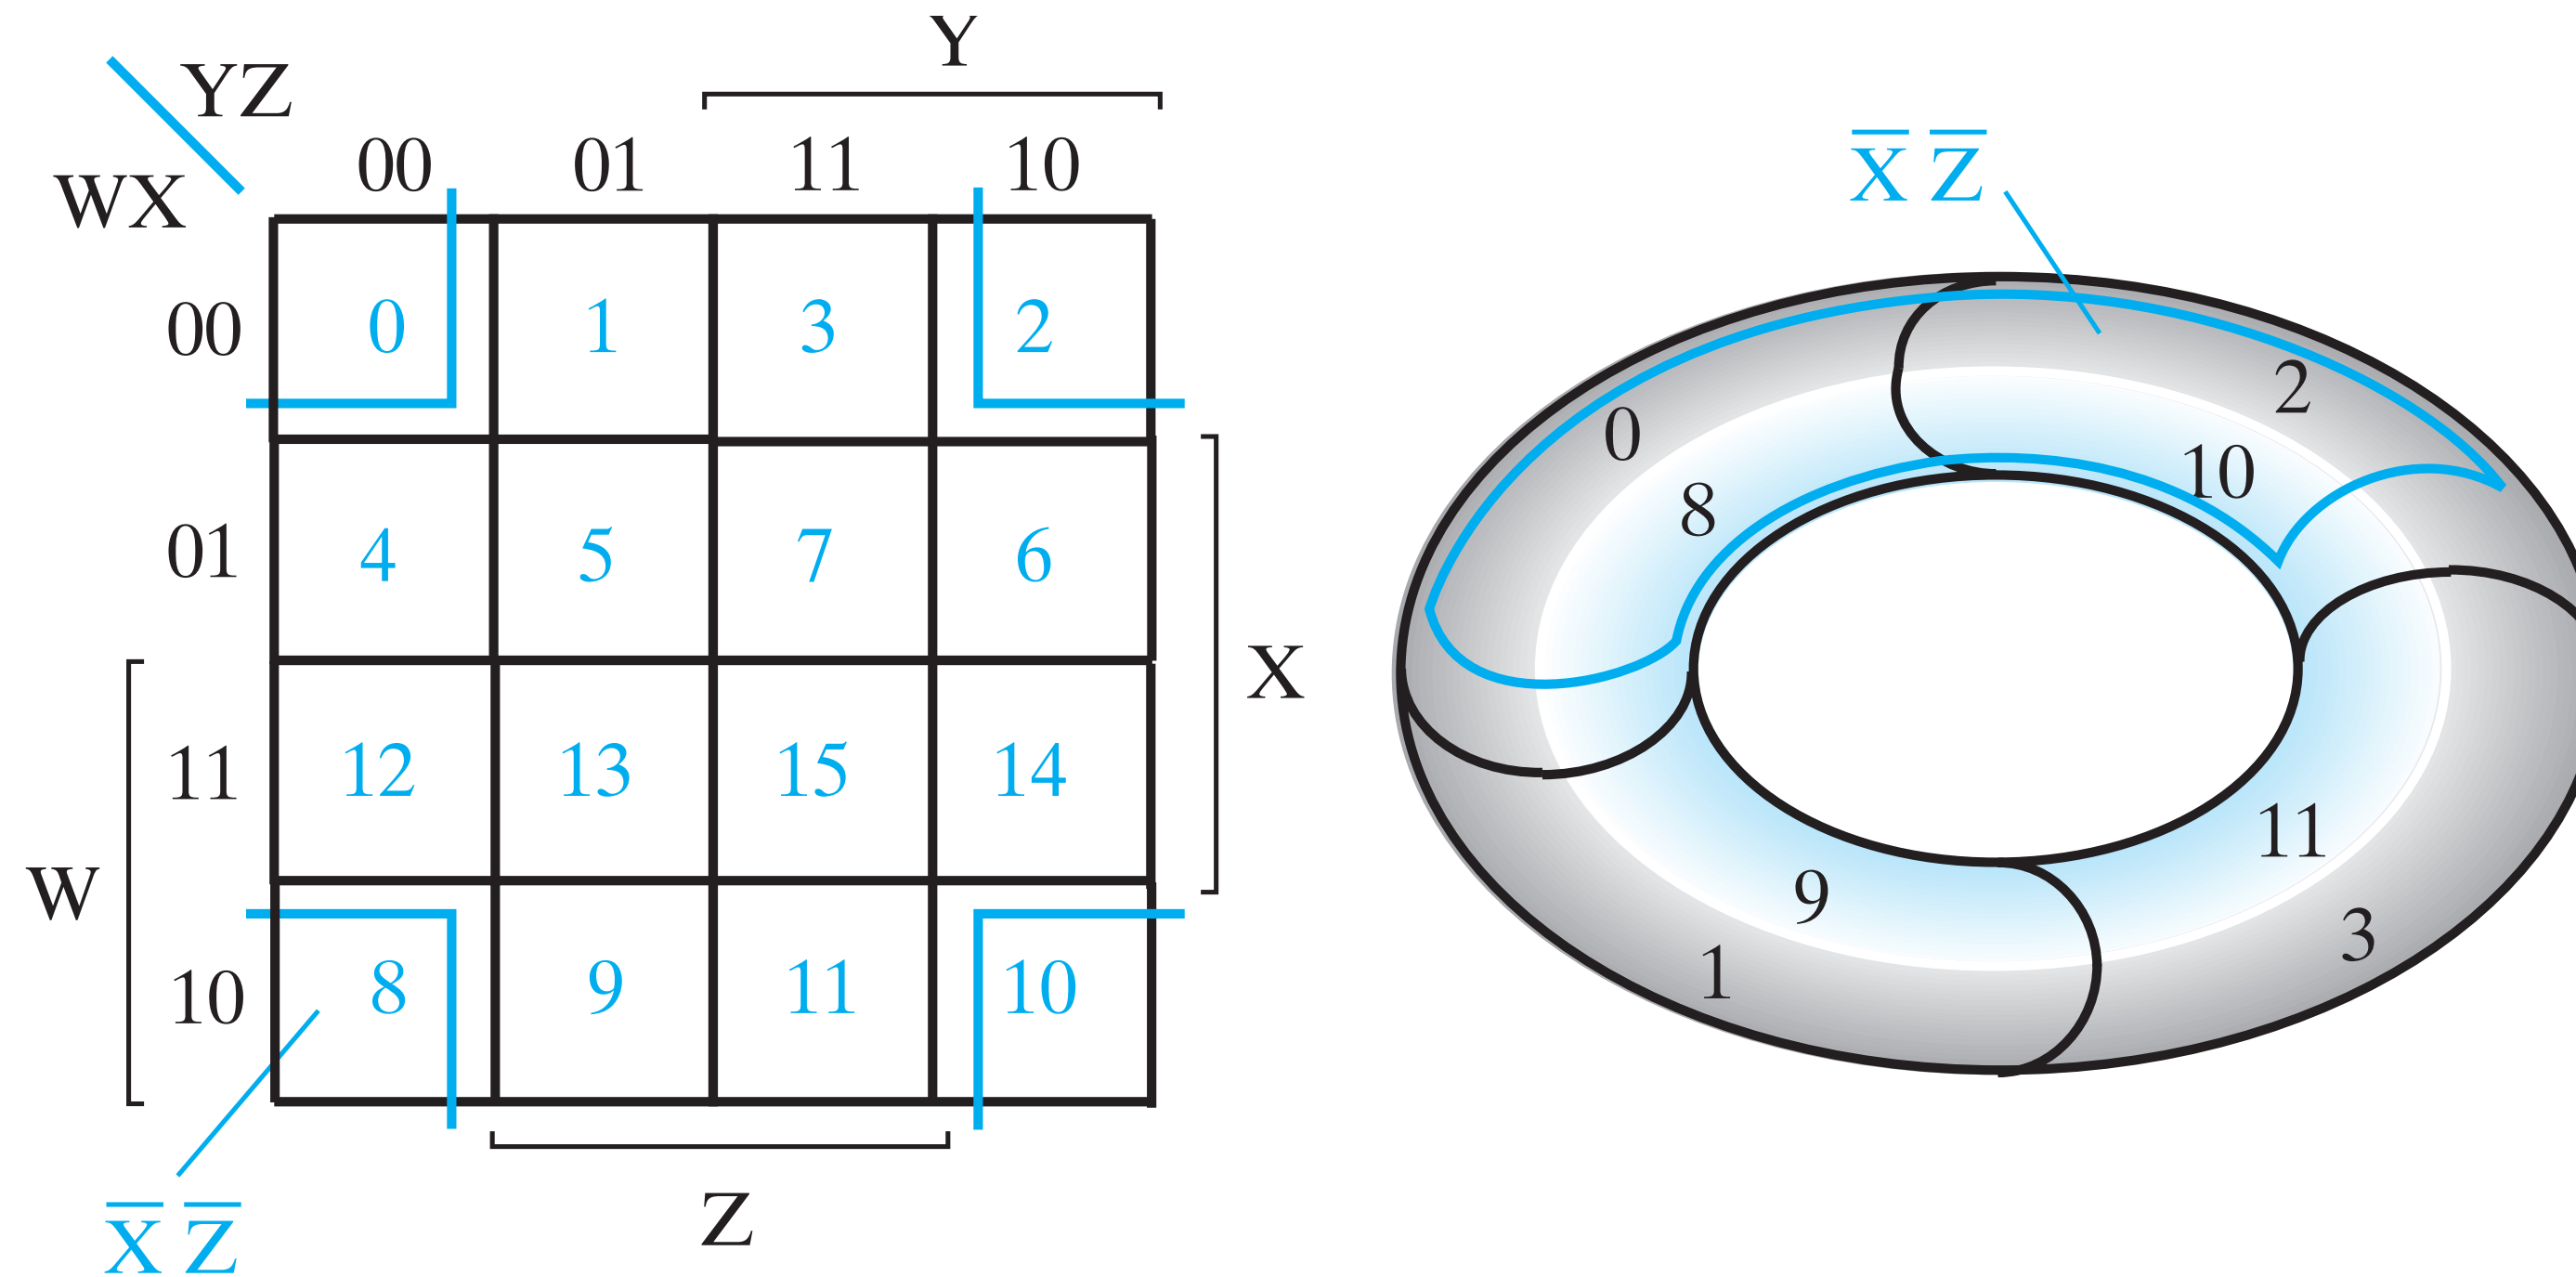

- Number of squares in each map is equal to the number of minterms for the same number of variables, light blue digit above is the index (of minterm)
- Two squares are adjacent if they only differ in one variable
- Binary value inside at each position indicates the truth table value for that term

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0	1
	1	2	3

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0	1
	1	2	3

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values

Two Variable Maps Optimisation

		Y	
		0	1
X	0	00	11
	1	20	31

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 0	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 0	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0	1
	1	0	1

Truth Table

X	Y	F
0	0	0
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0	1
	1	2	3

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0	1
	1	2	3

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 1	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 1	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 1	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 1	1 1
	1	2 0	3 1

Truth Table

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Two Variable Maps Optimisation

		Y	
		0	1
X	0	0 1	1 1
	1	2 0	3 1


Truth Table

$\bar{X} + Y$

X	Y	F
0	0	1
0	1	1
1	0	0
1	1	1


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Three Variable Maps Optimisation

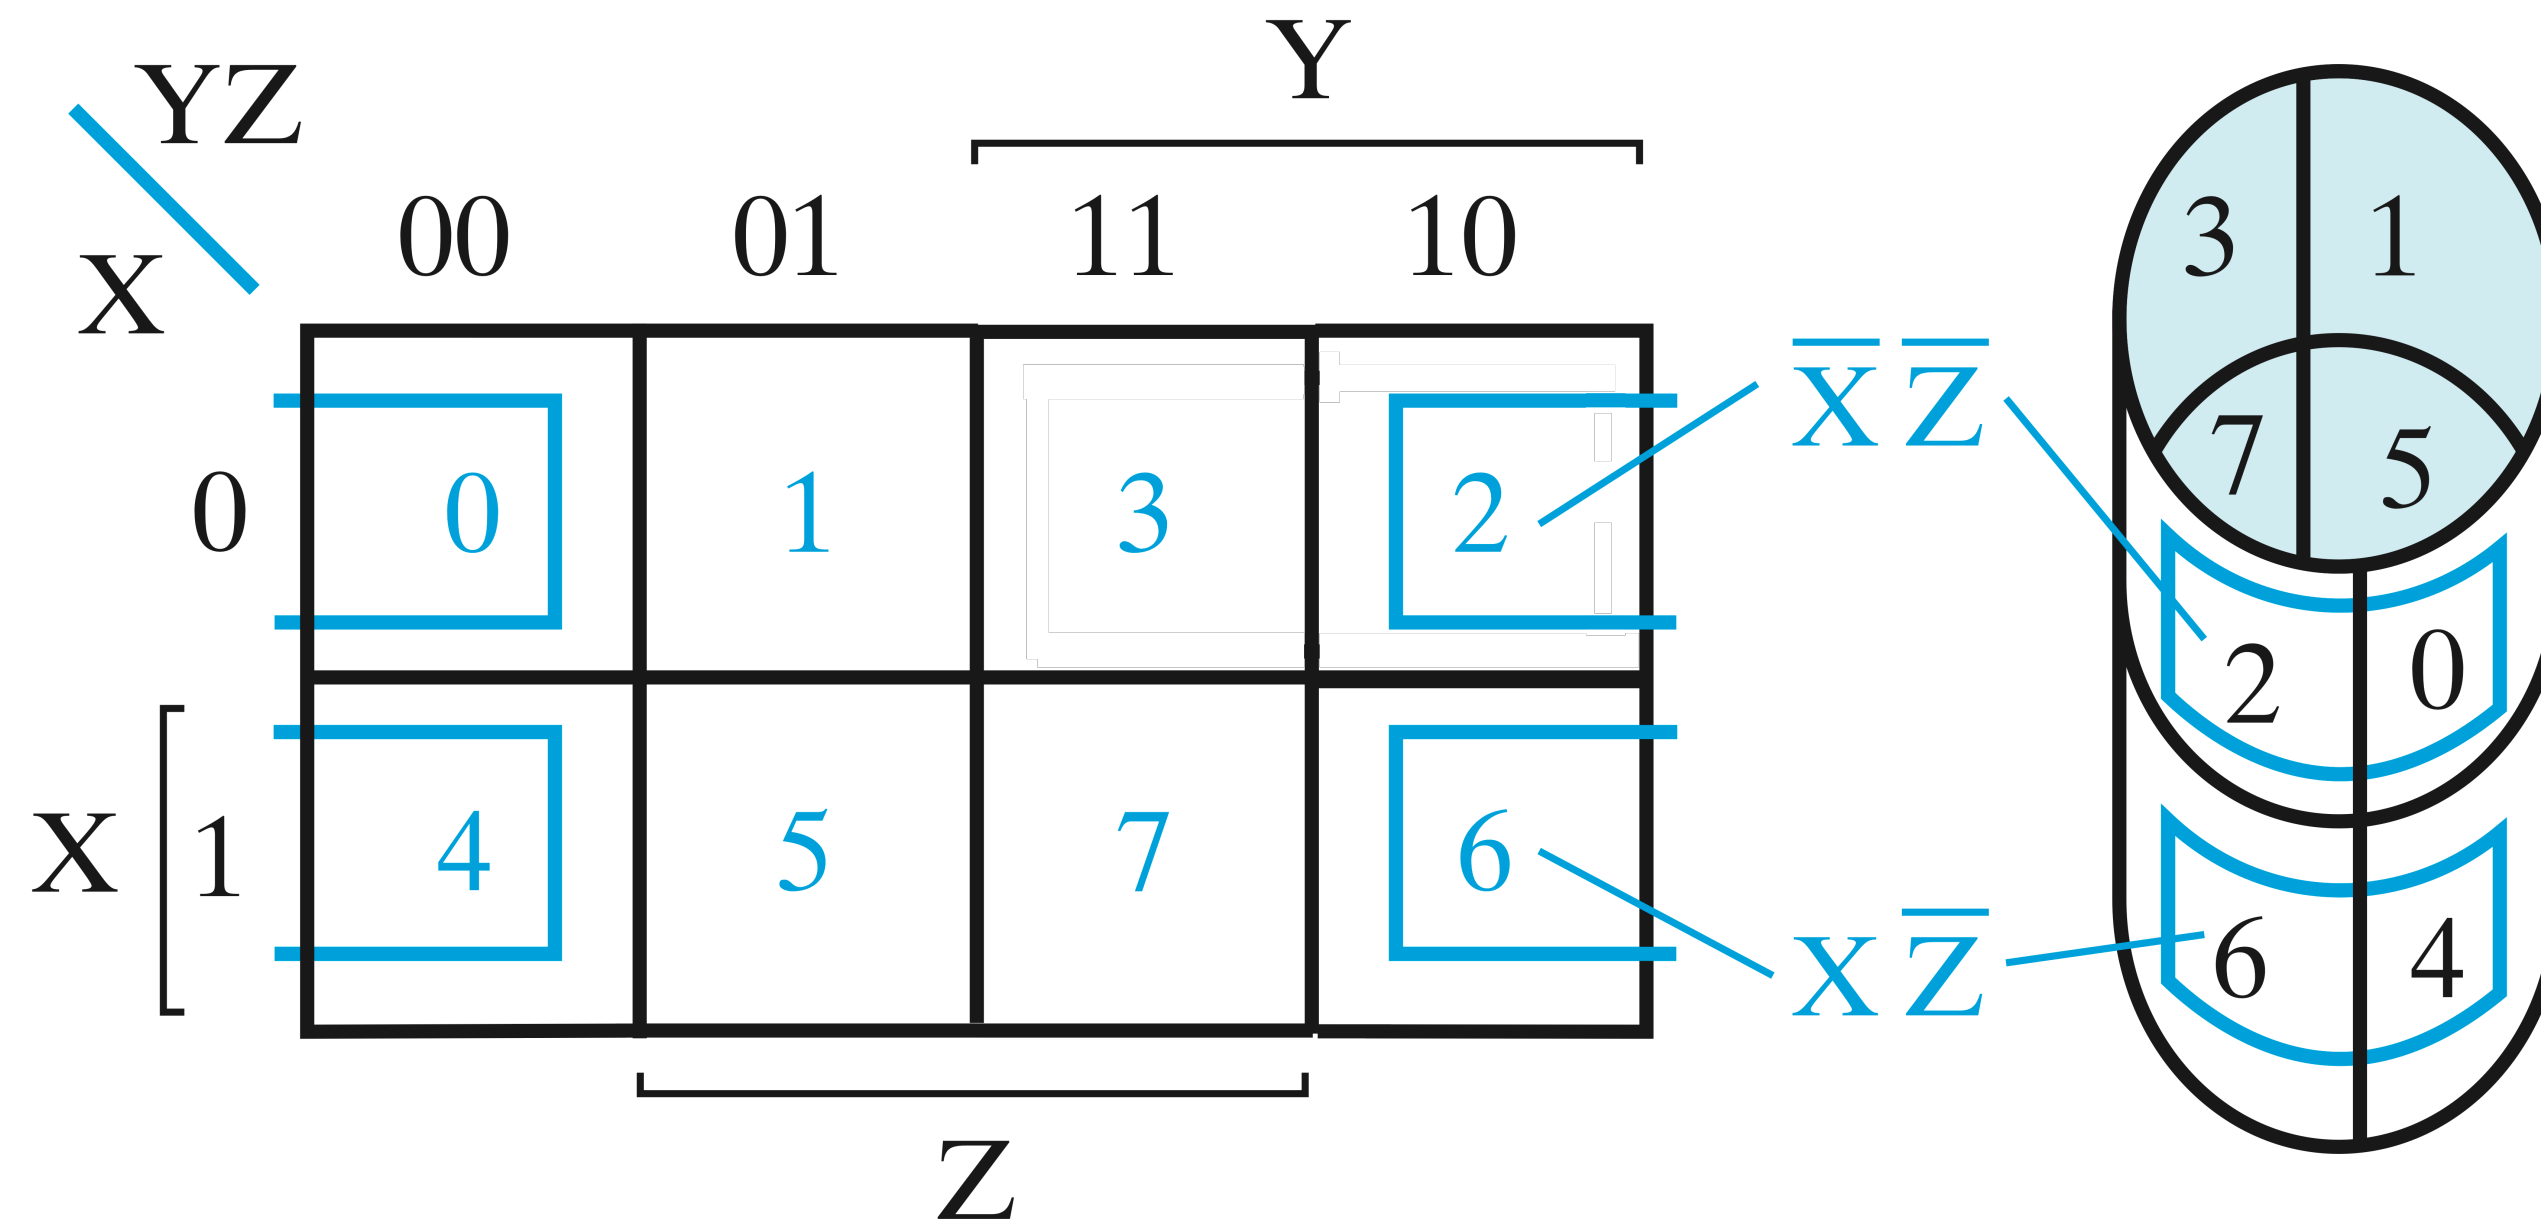

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 3, 4, 5)$$


Three Variable Maps Optimisation

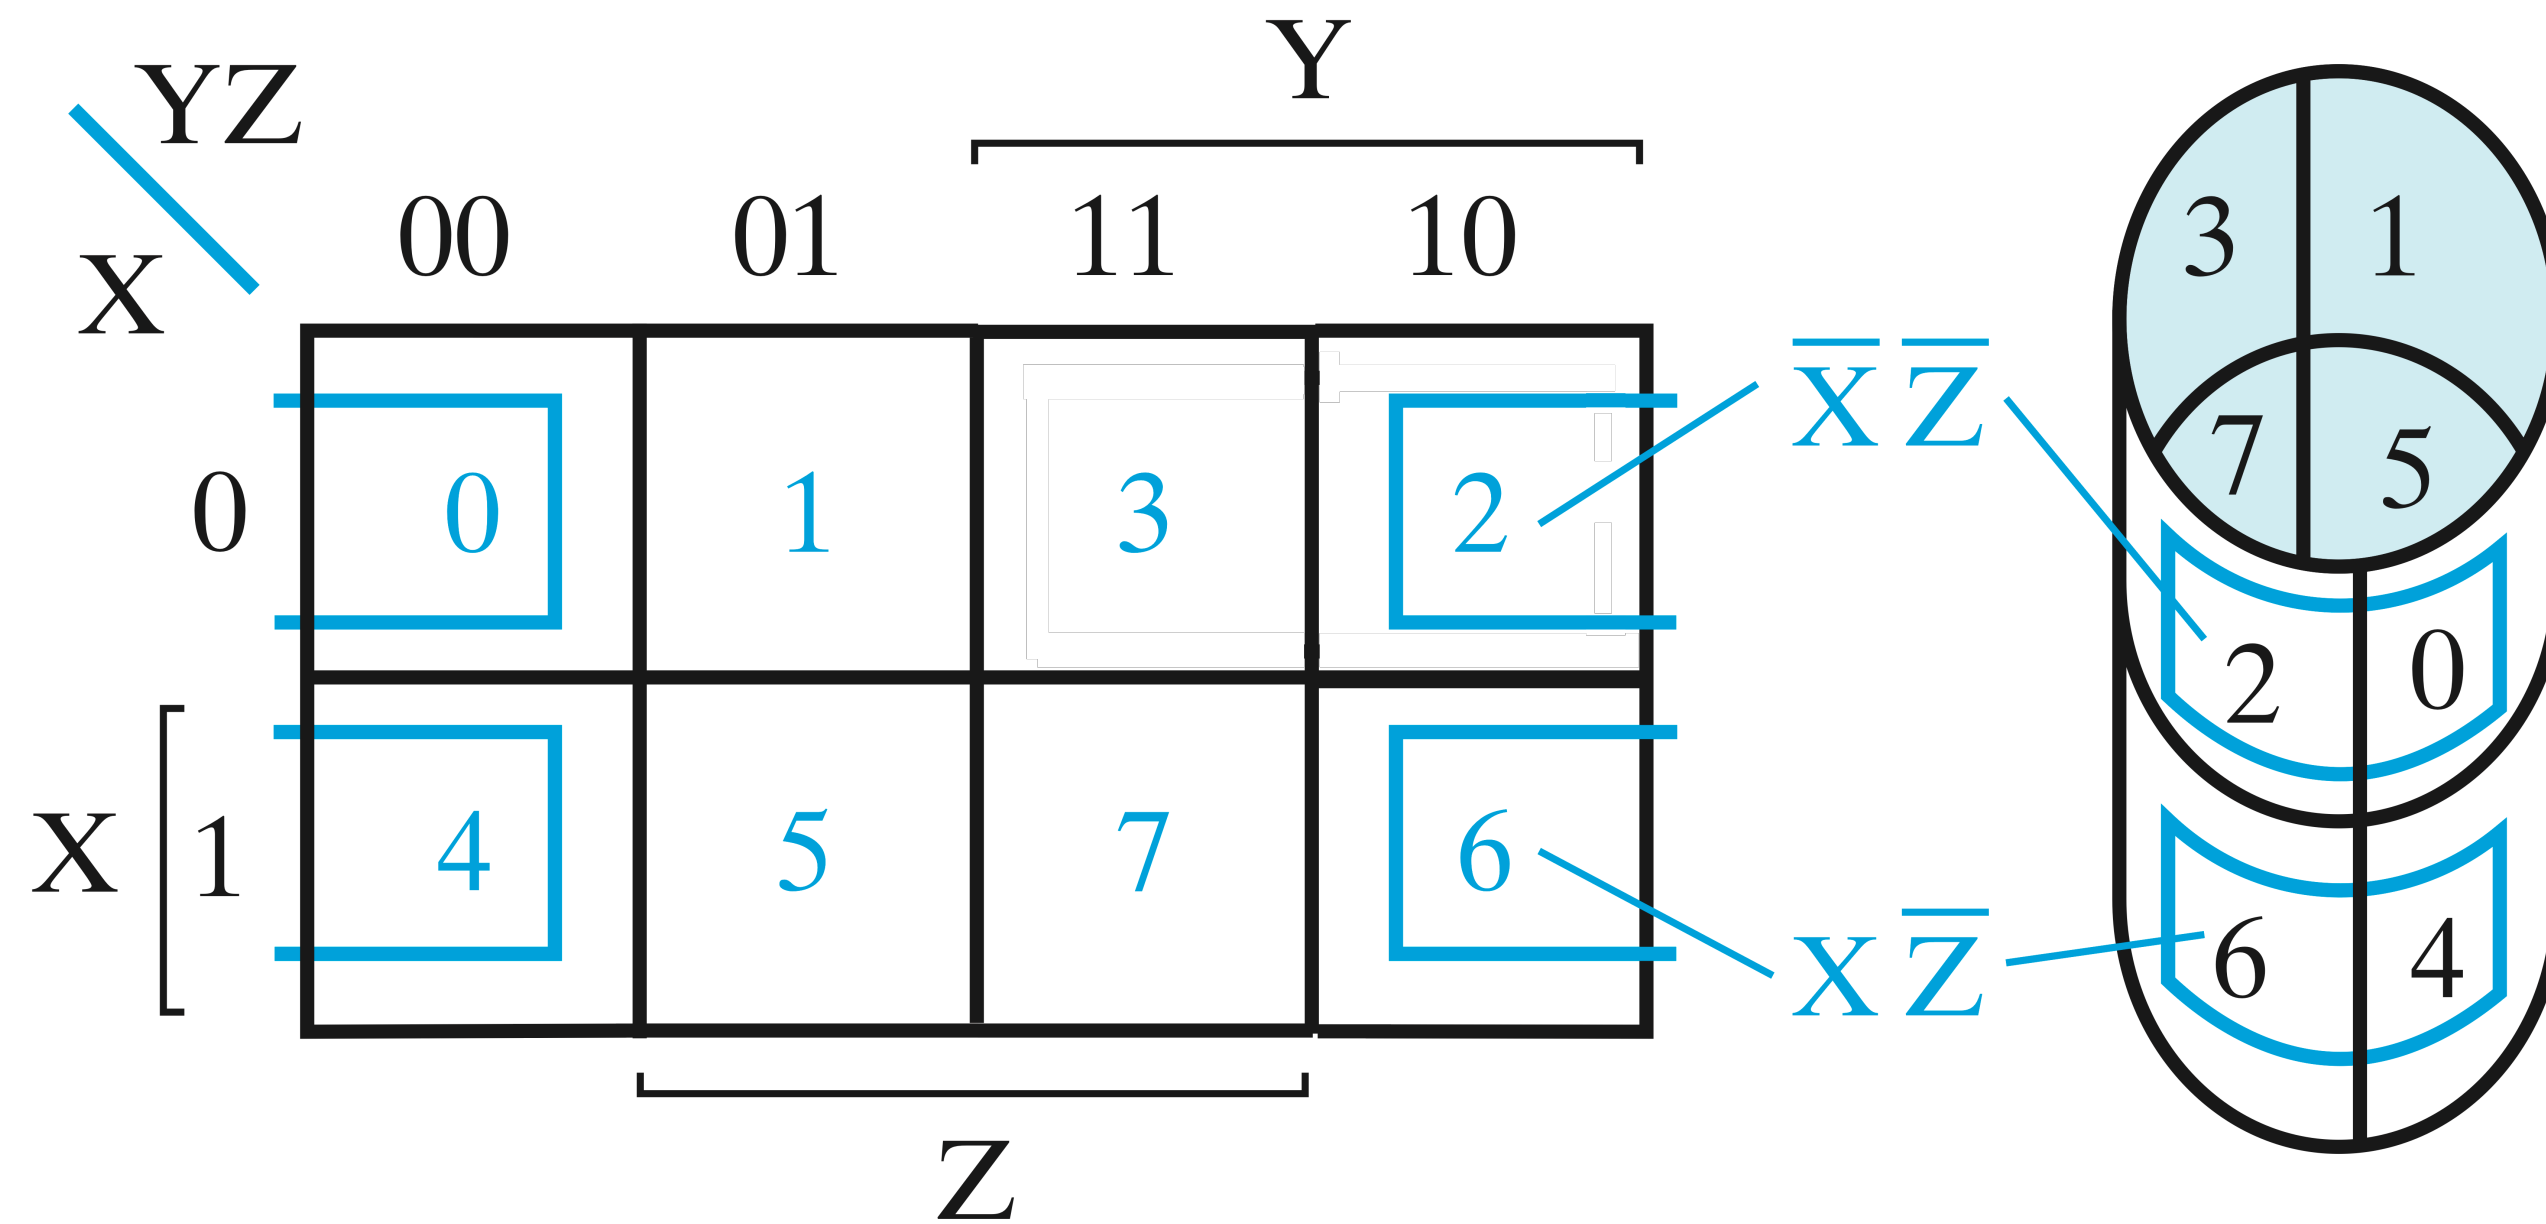

- Step 1: Enter the values

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 3, 4, 5)$$


Three Variable Maps Optimisation

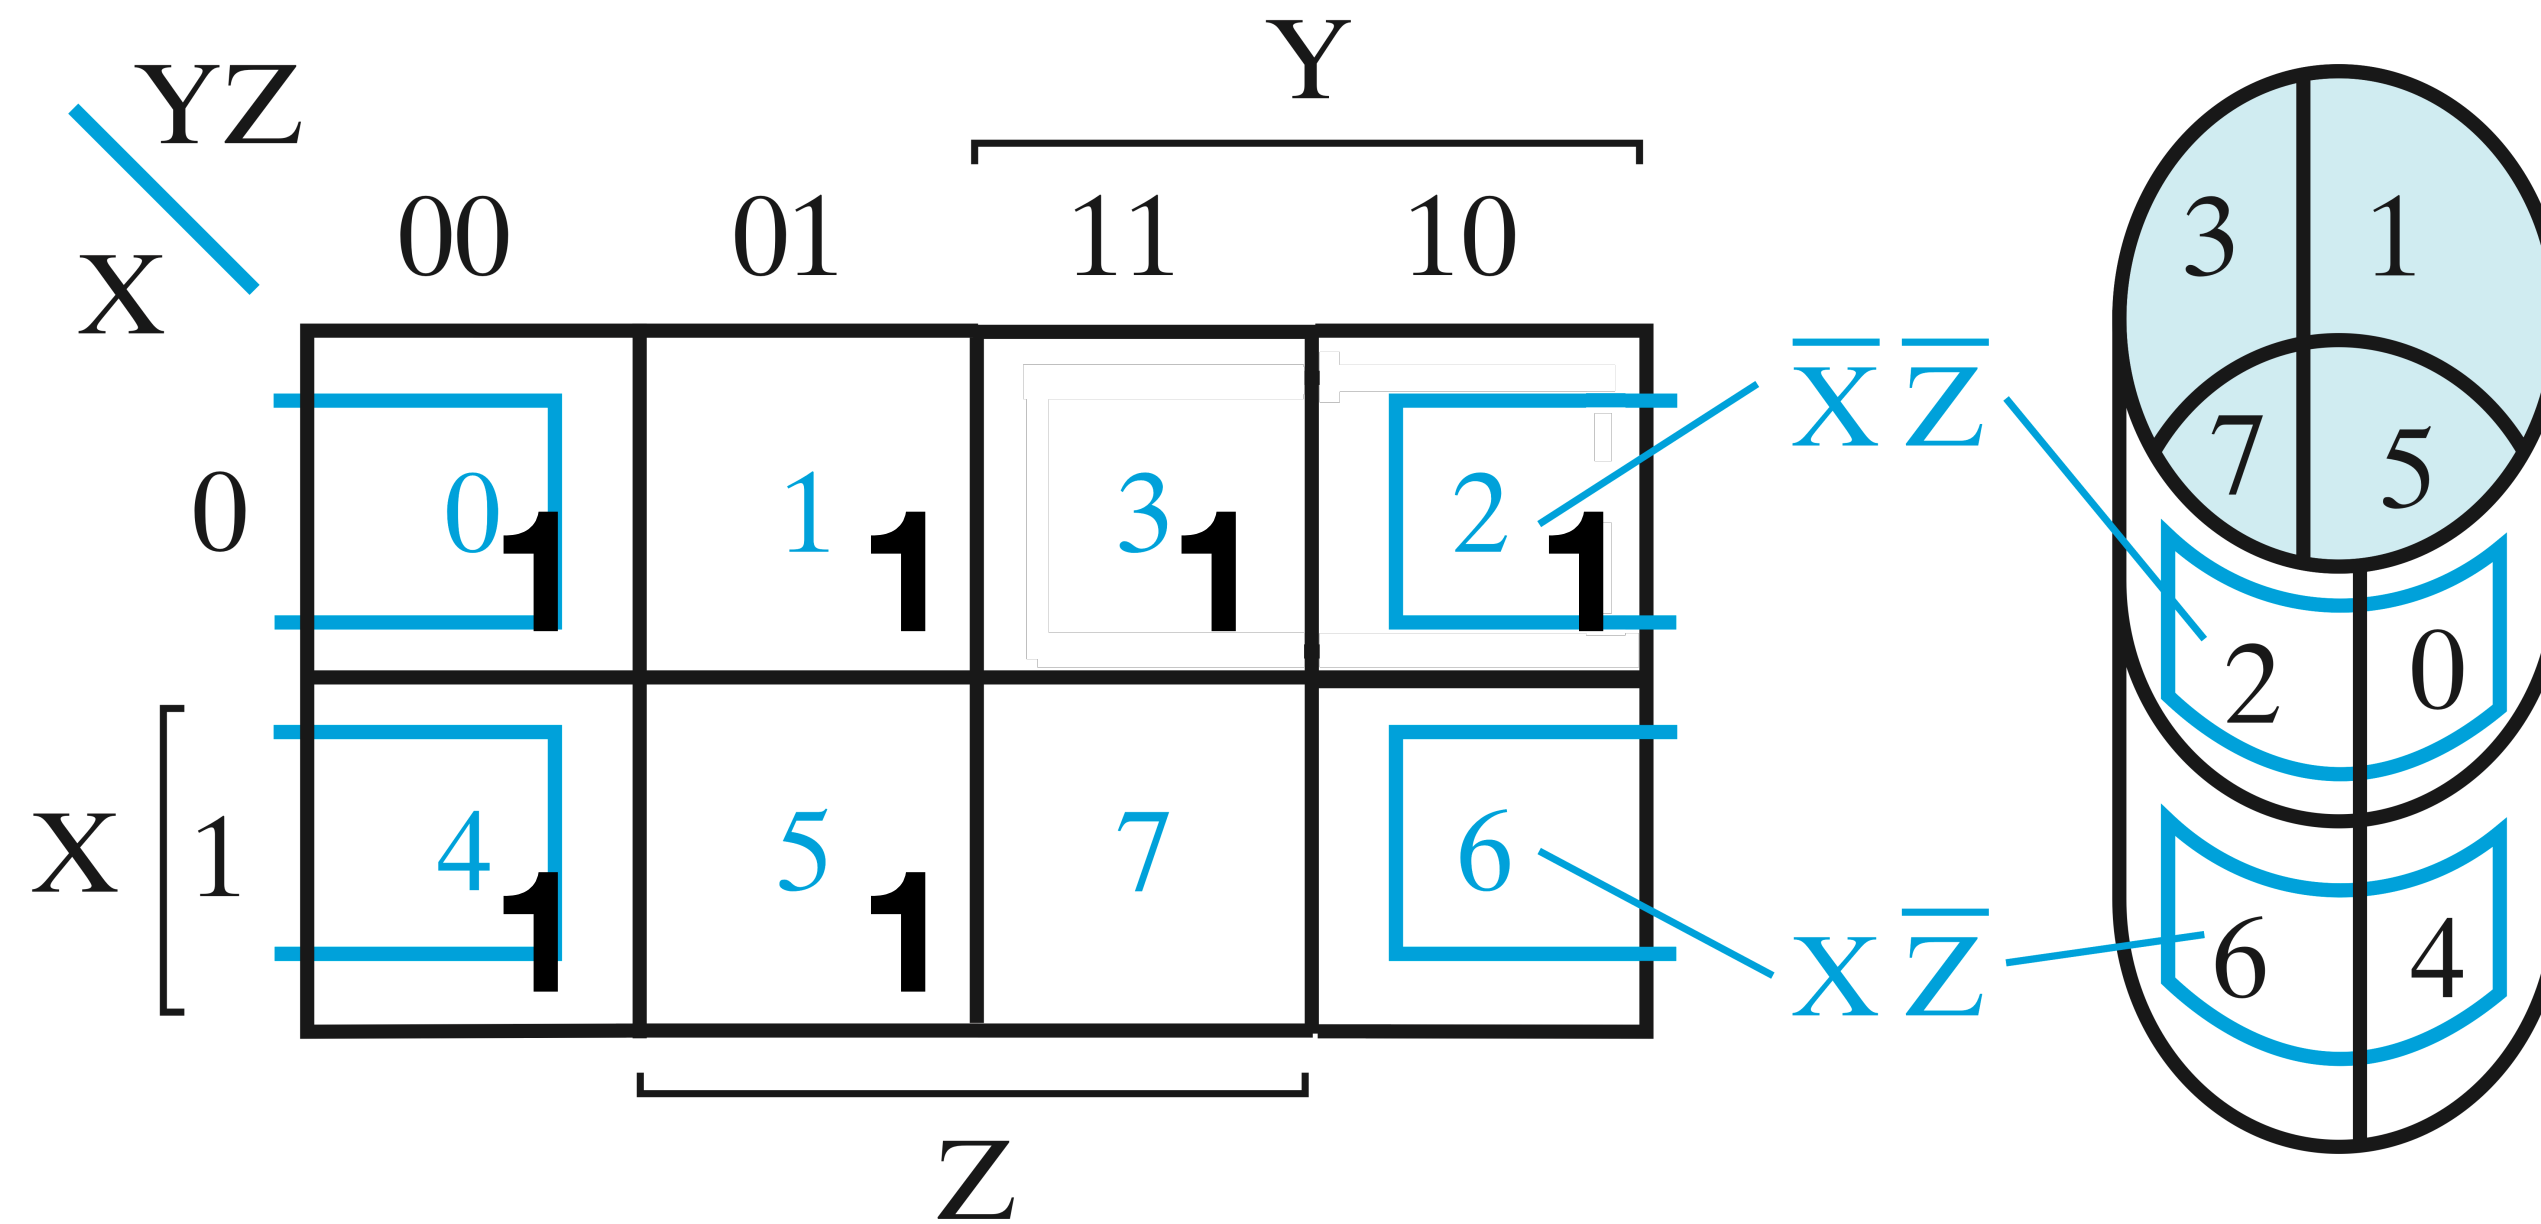

- Step 1: Enter the values

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 3, 4, 5)$$


Three Variable Maps Optimisation

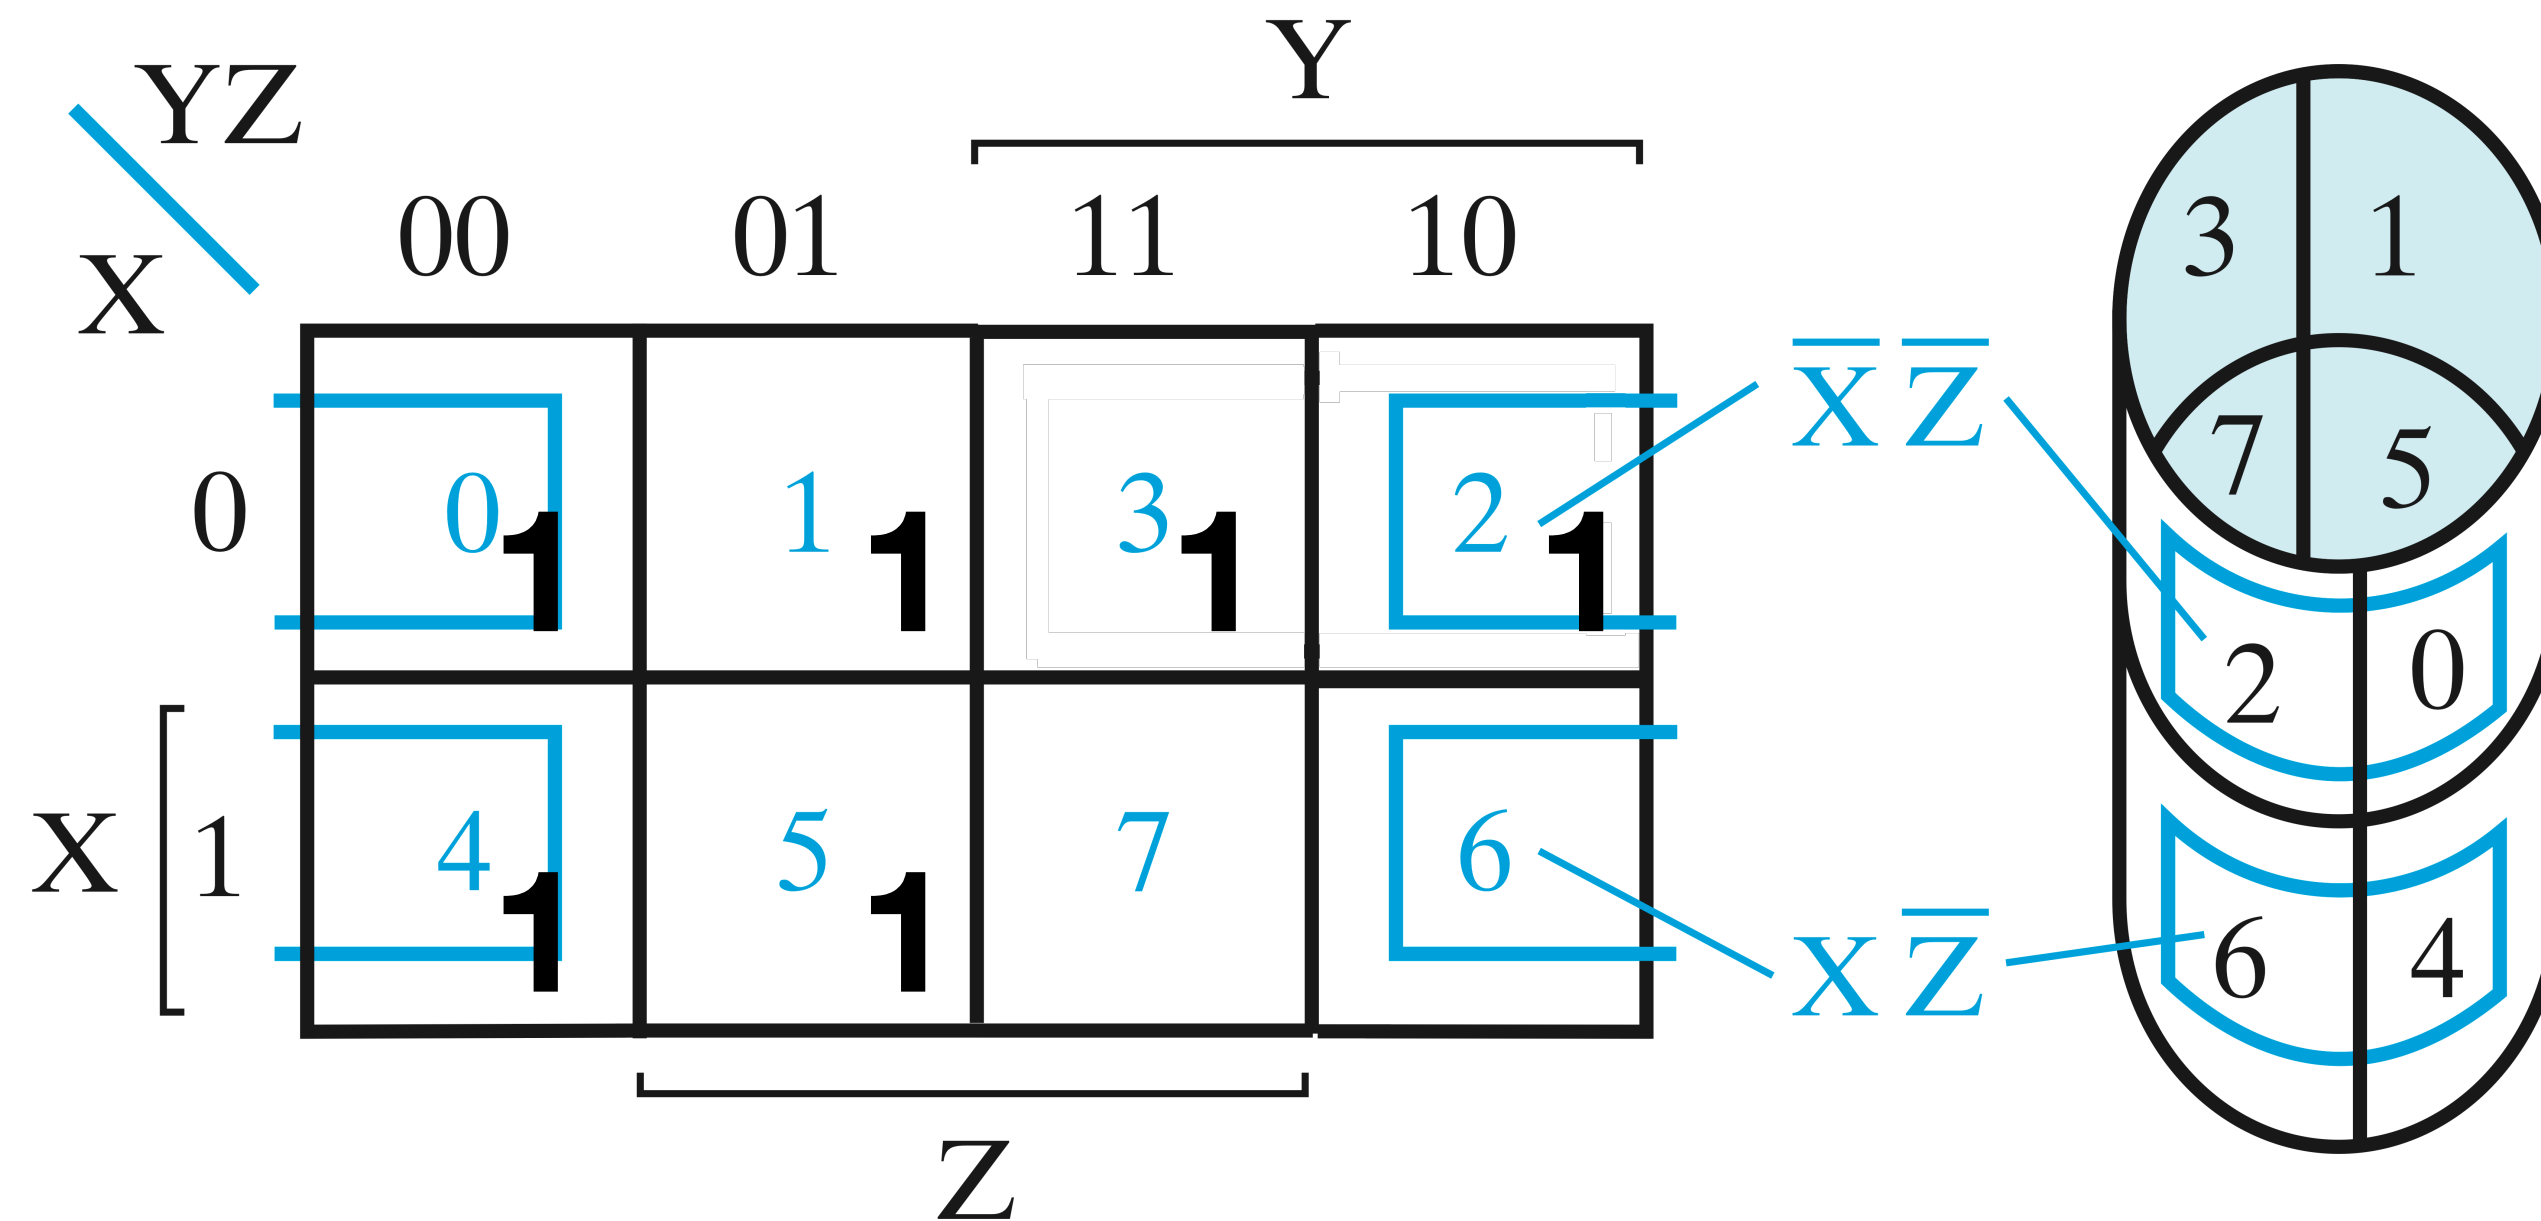

$$F(X, Y, Z) = \sum m(0, 1, 2, 3, 4, 5)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s


Three Variable Maps Optimisation

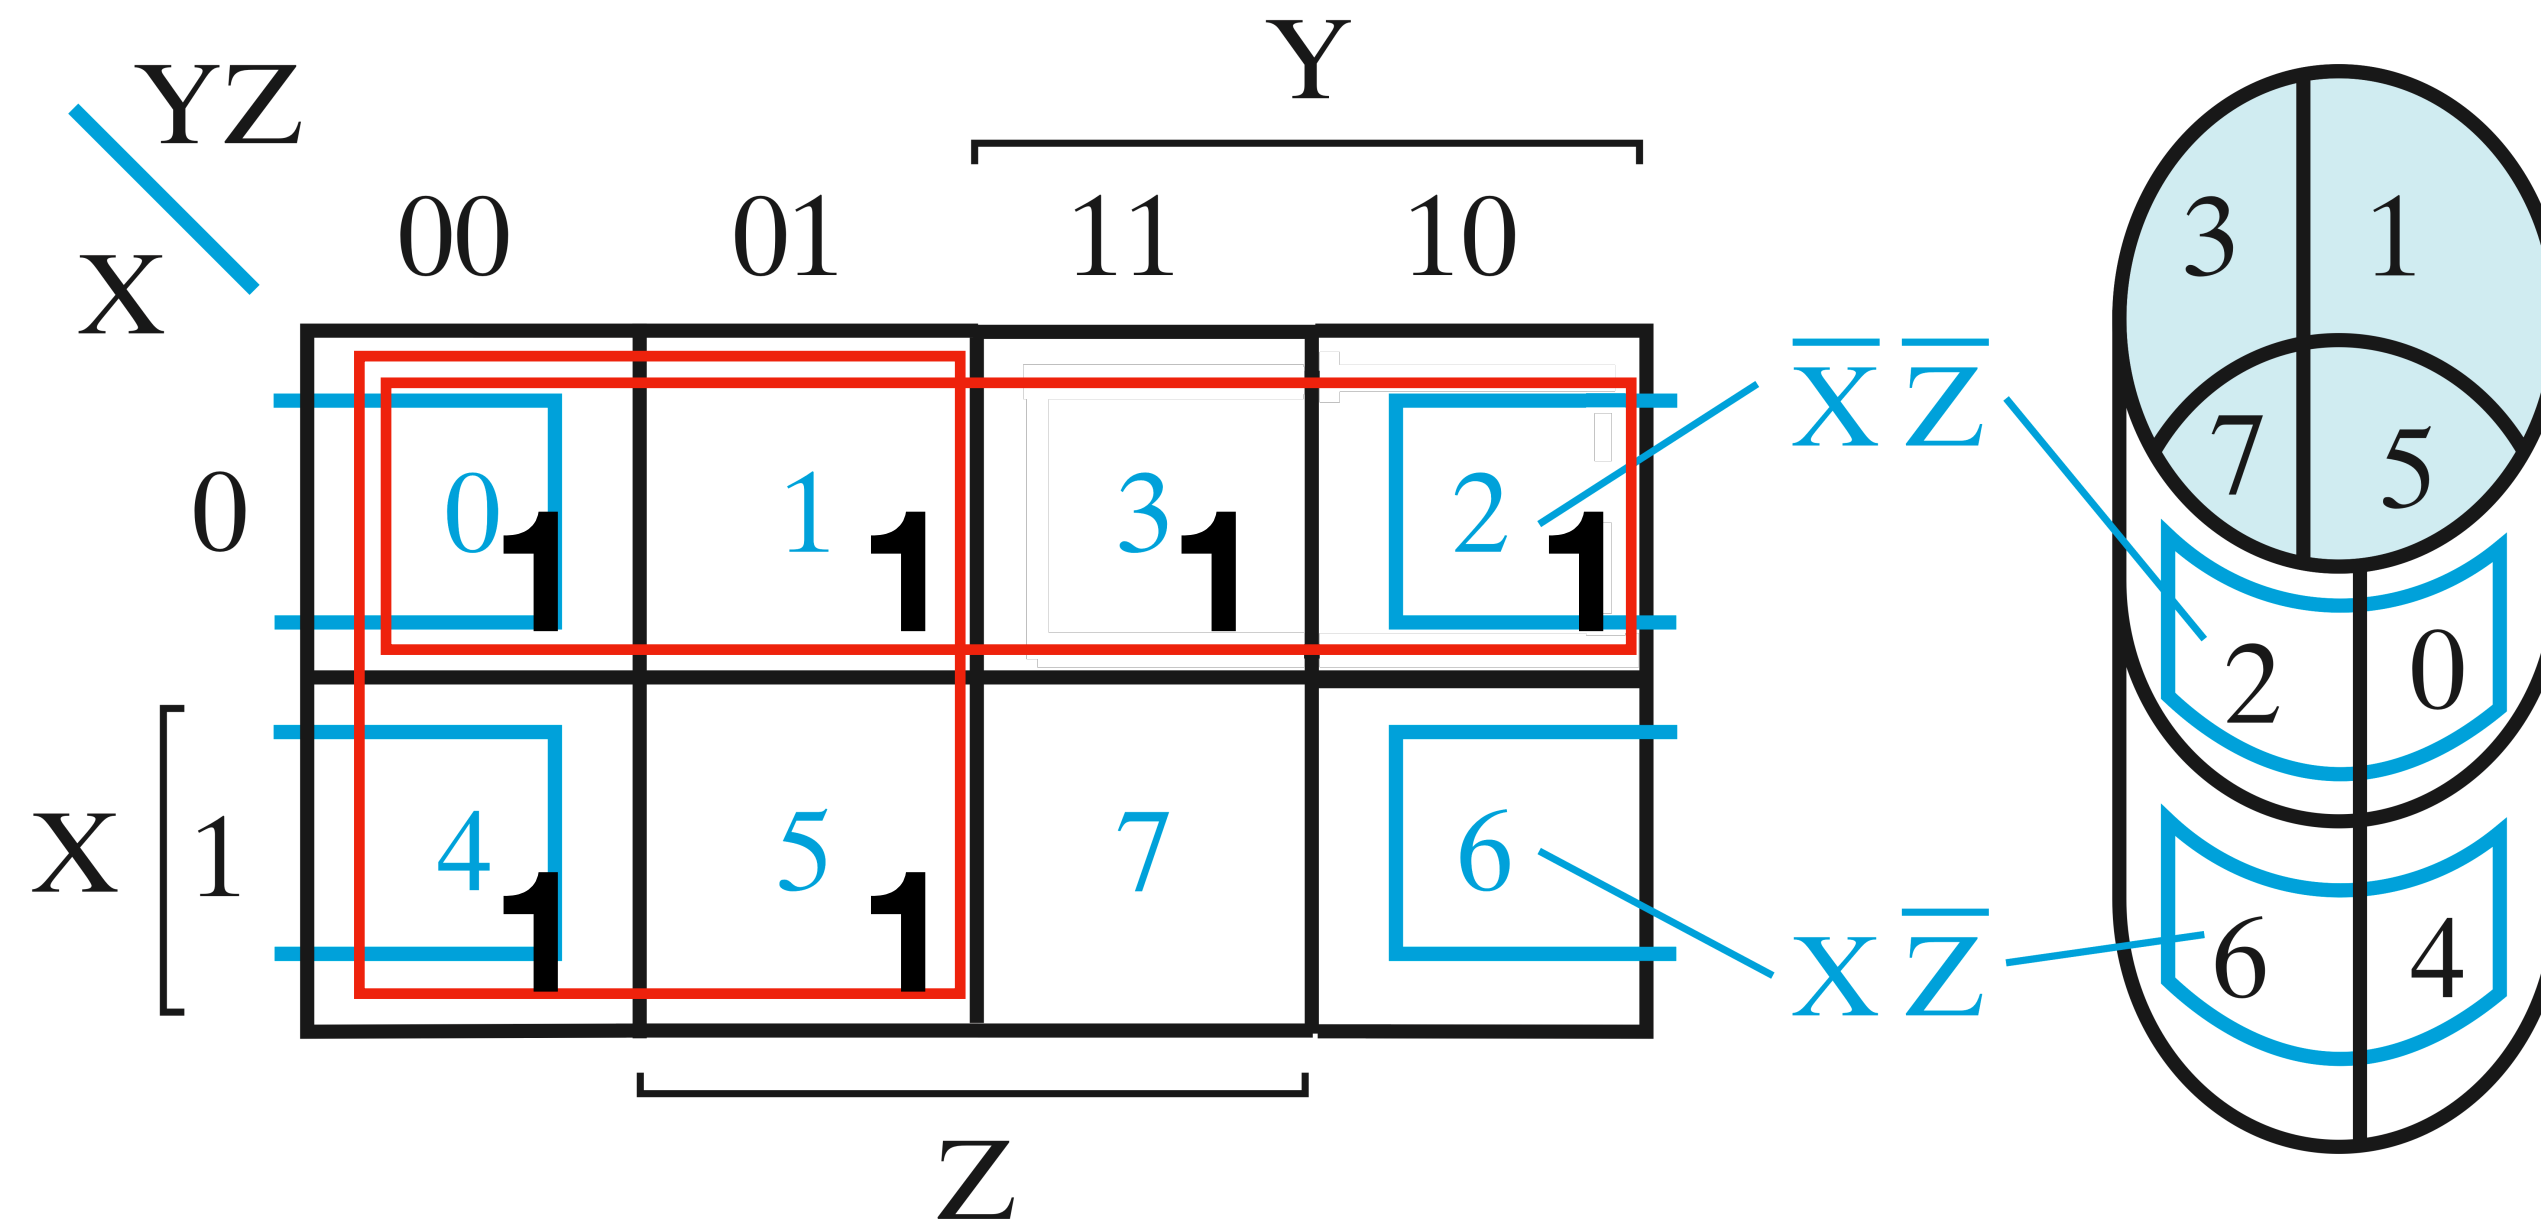

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 3, 4, 5)$$


Three Variable Maps Optimisation

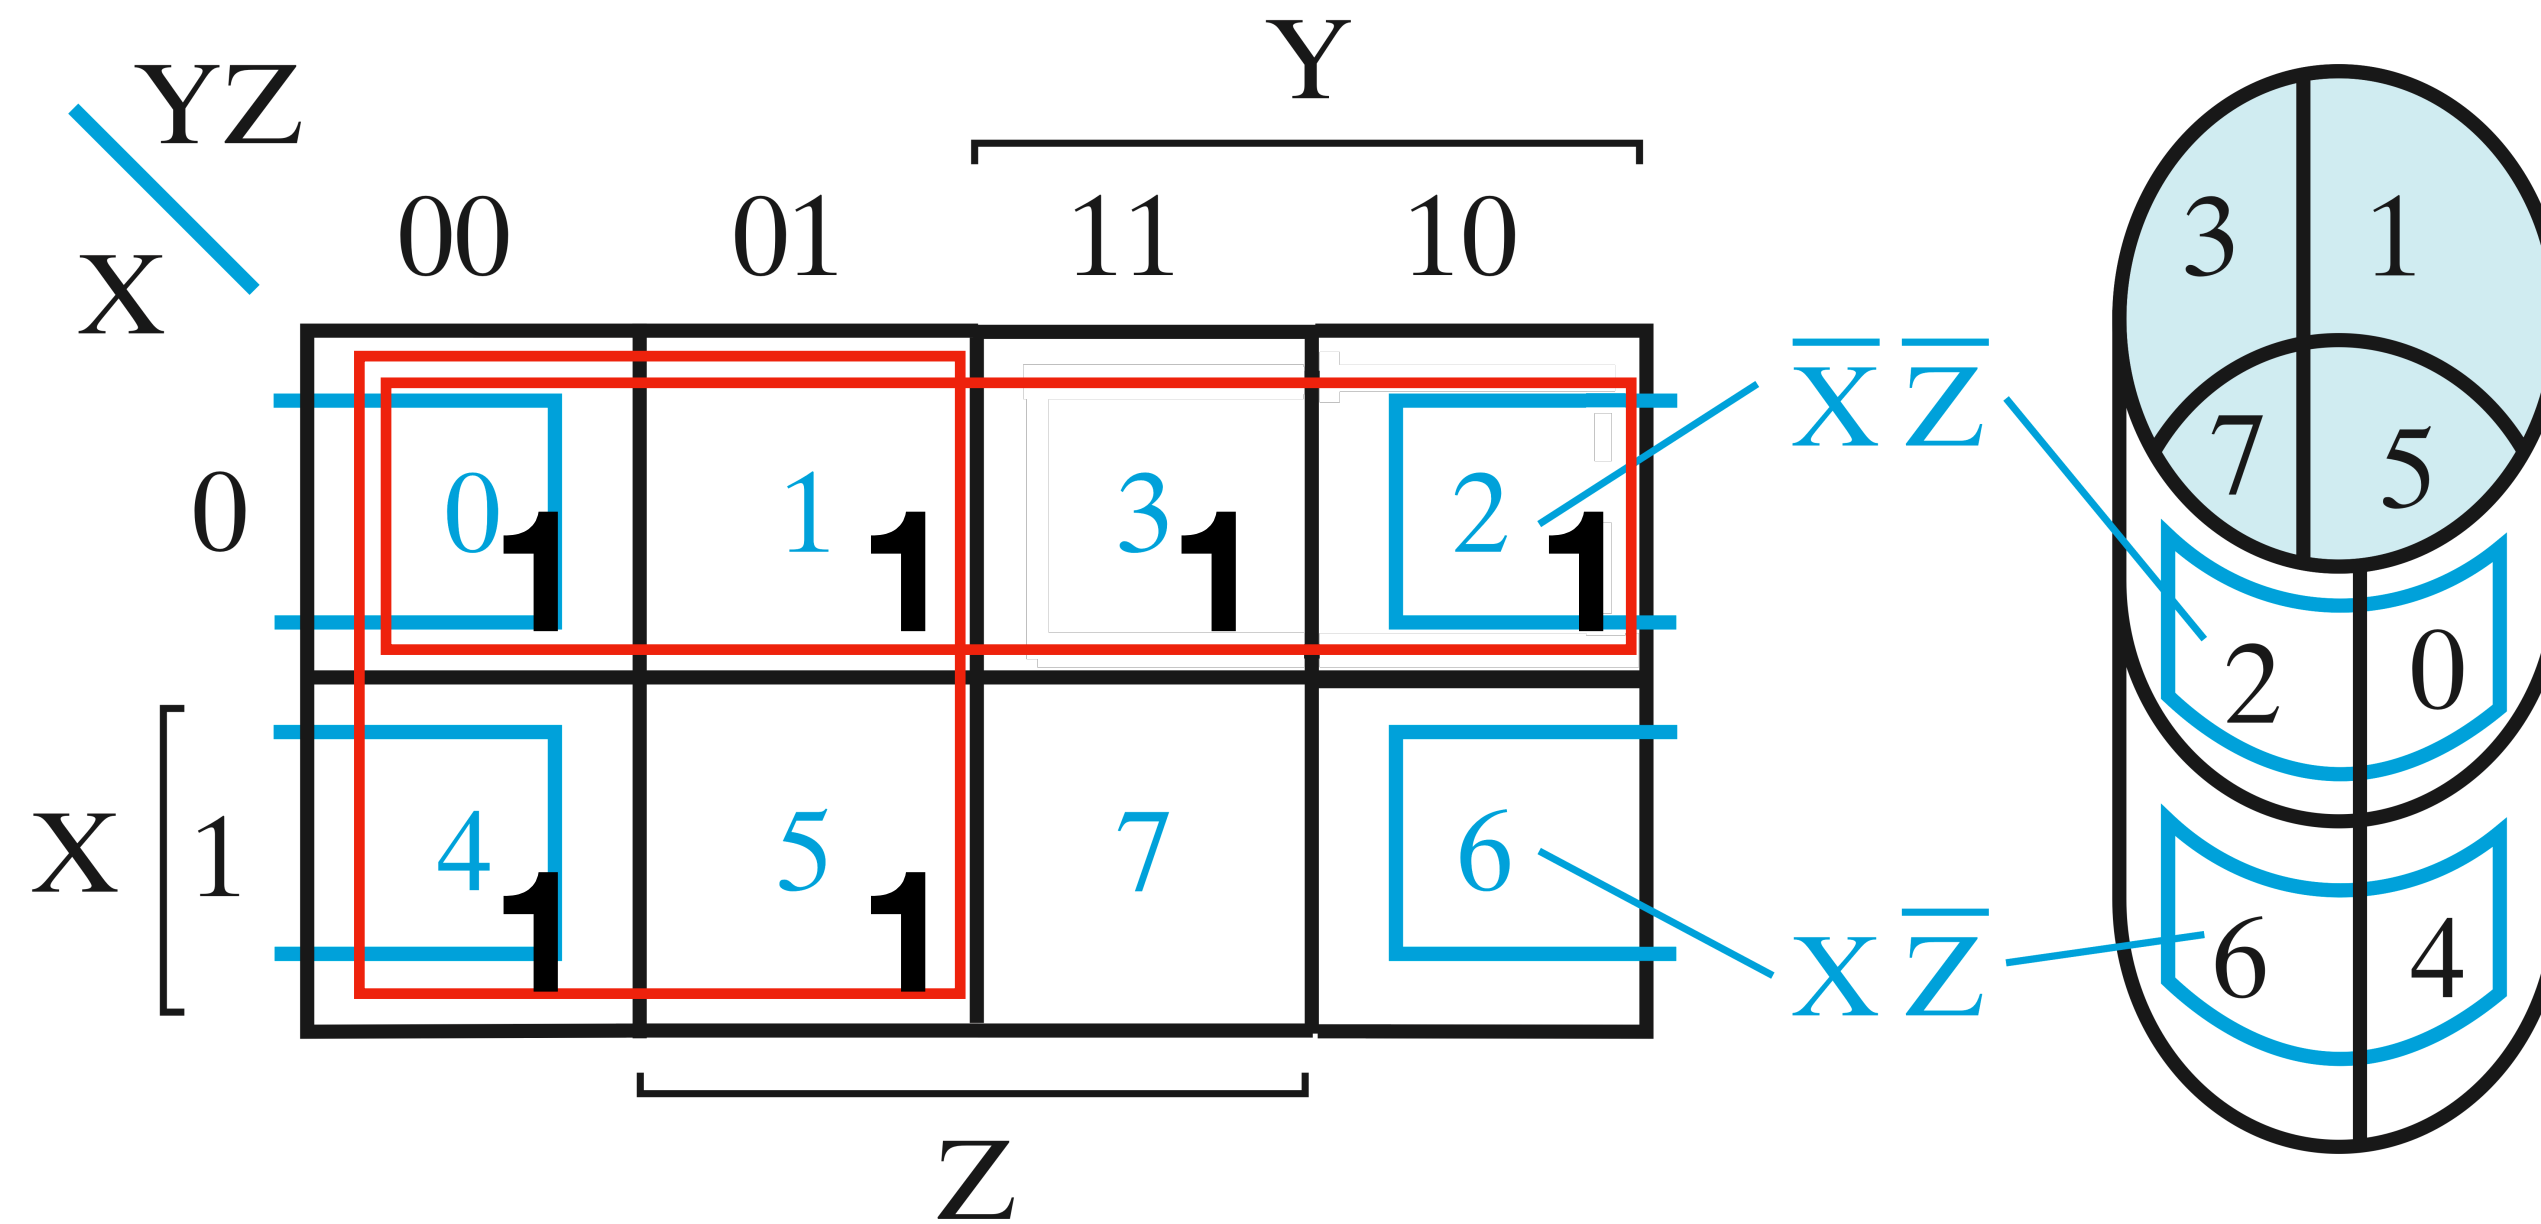

$$F(X, Y, Z) = \sum m(0, 1, 2, 3, 4, 5)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Three Variable Maps Optimisation

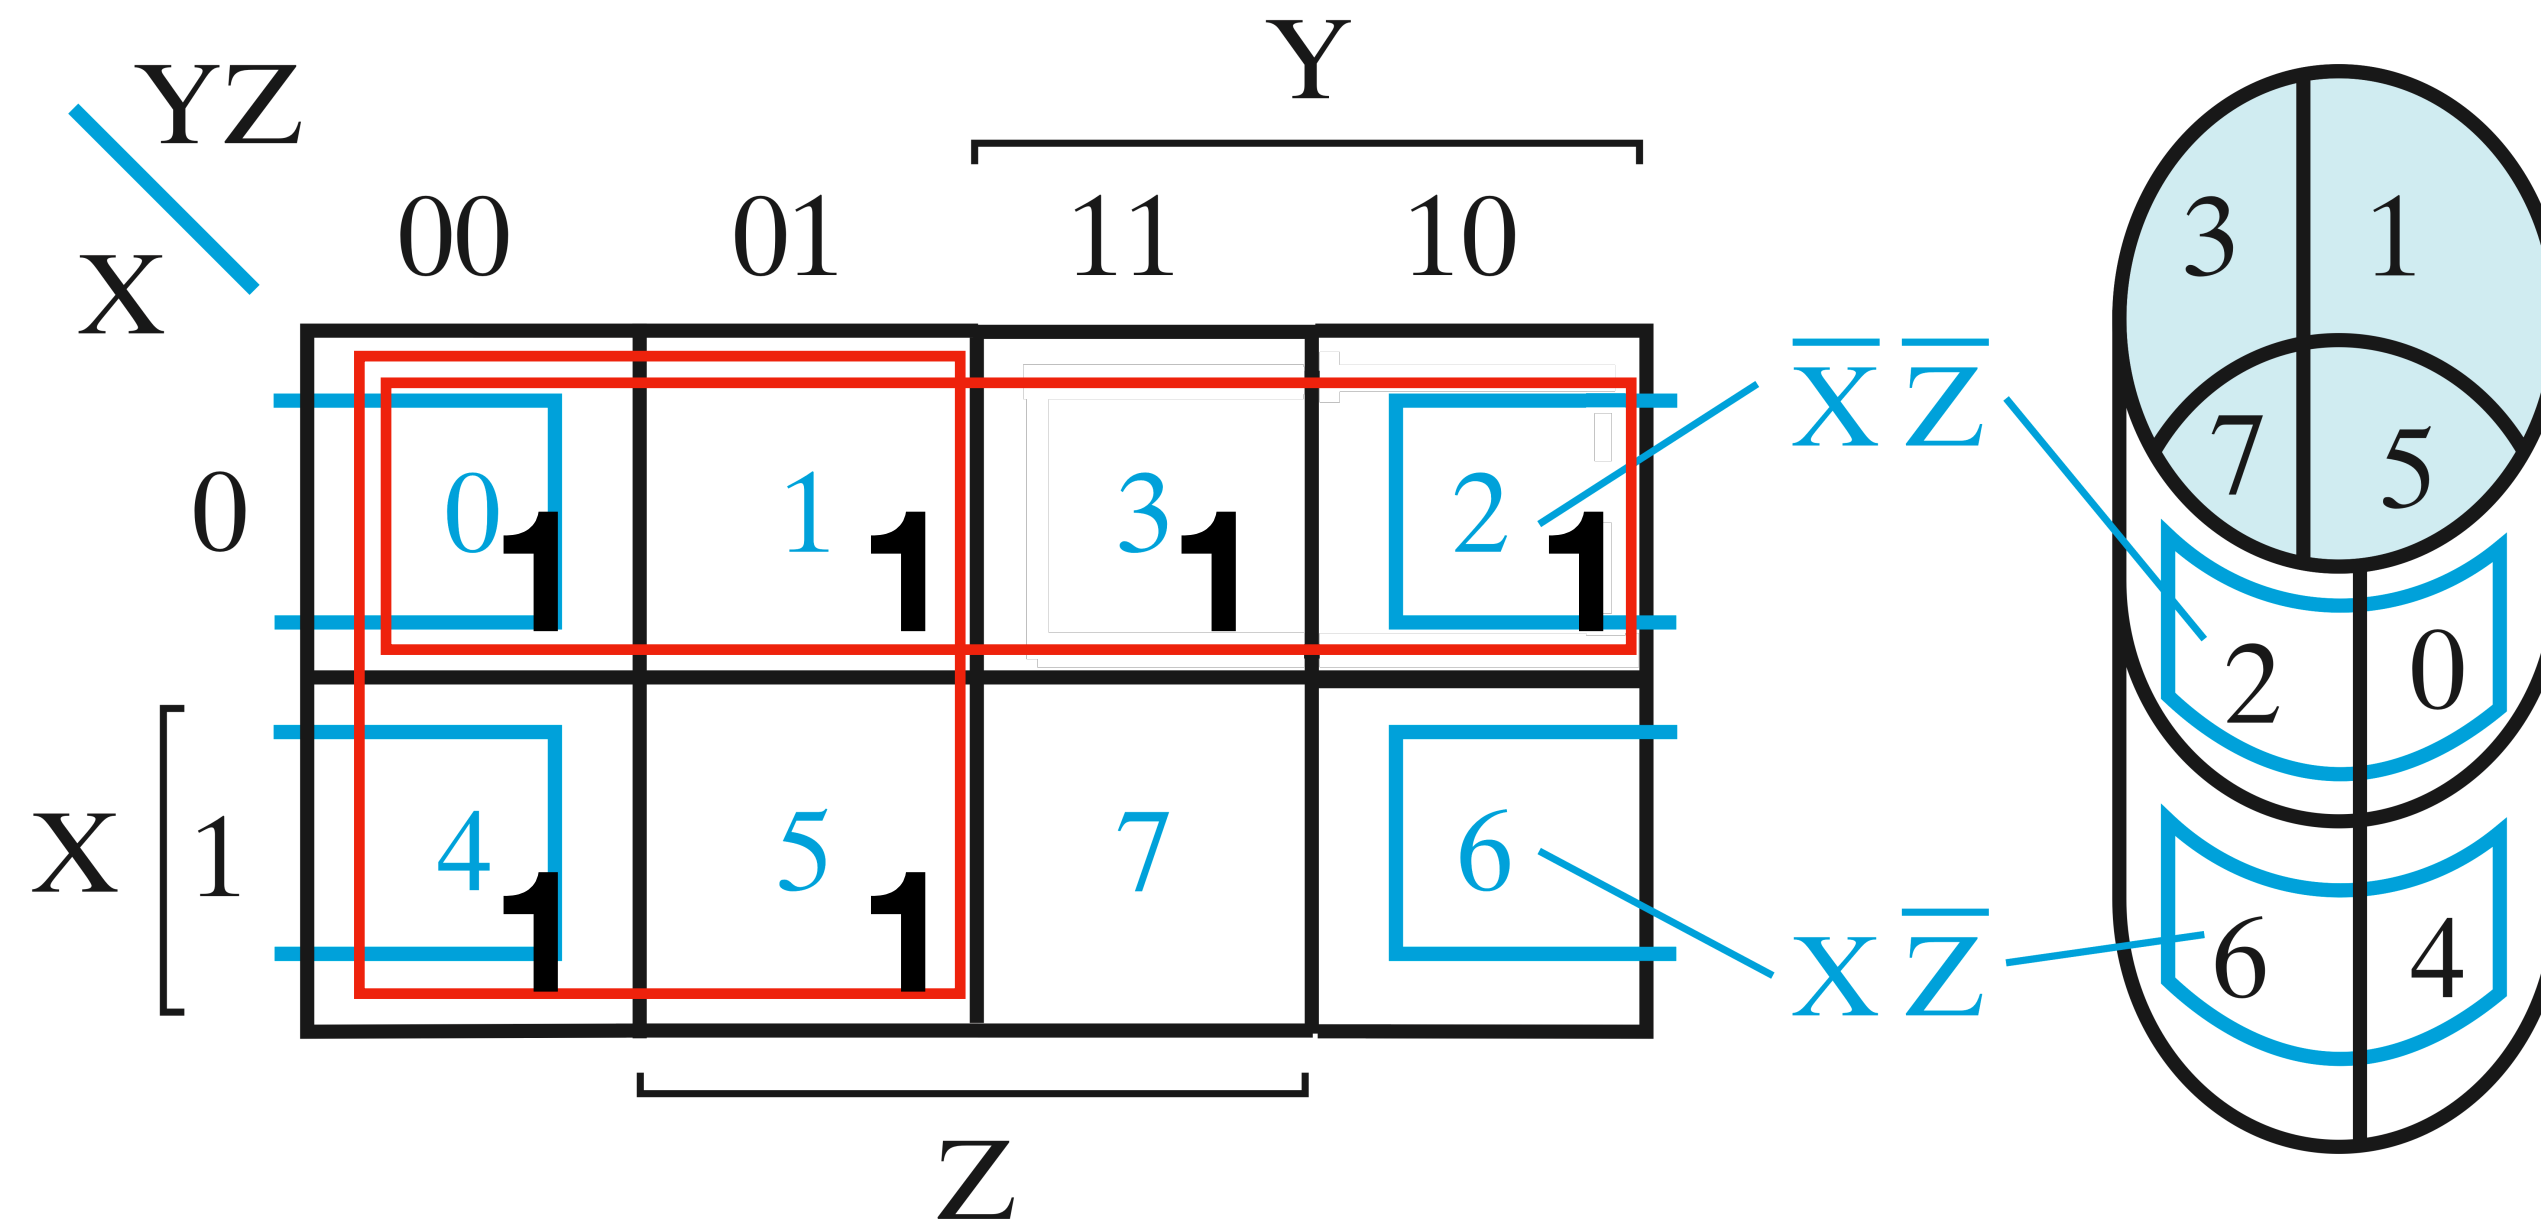


$$F(X, Y, Z) = \sum m(0, 1, 2, 3, 4, 5)$$

$$= \bar{X} + \bar{Y}$$


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Three Variable Maps Optimisation

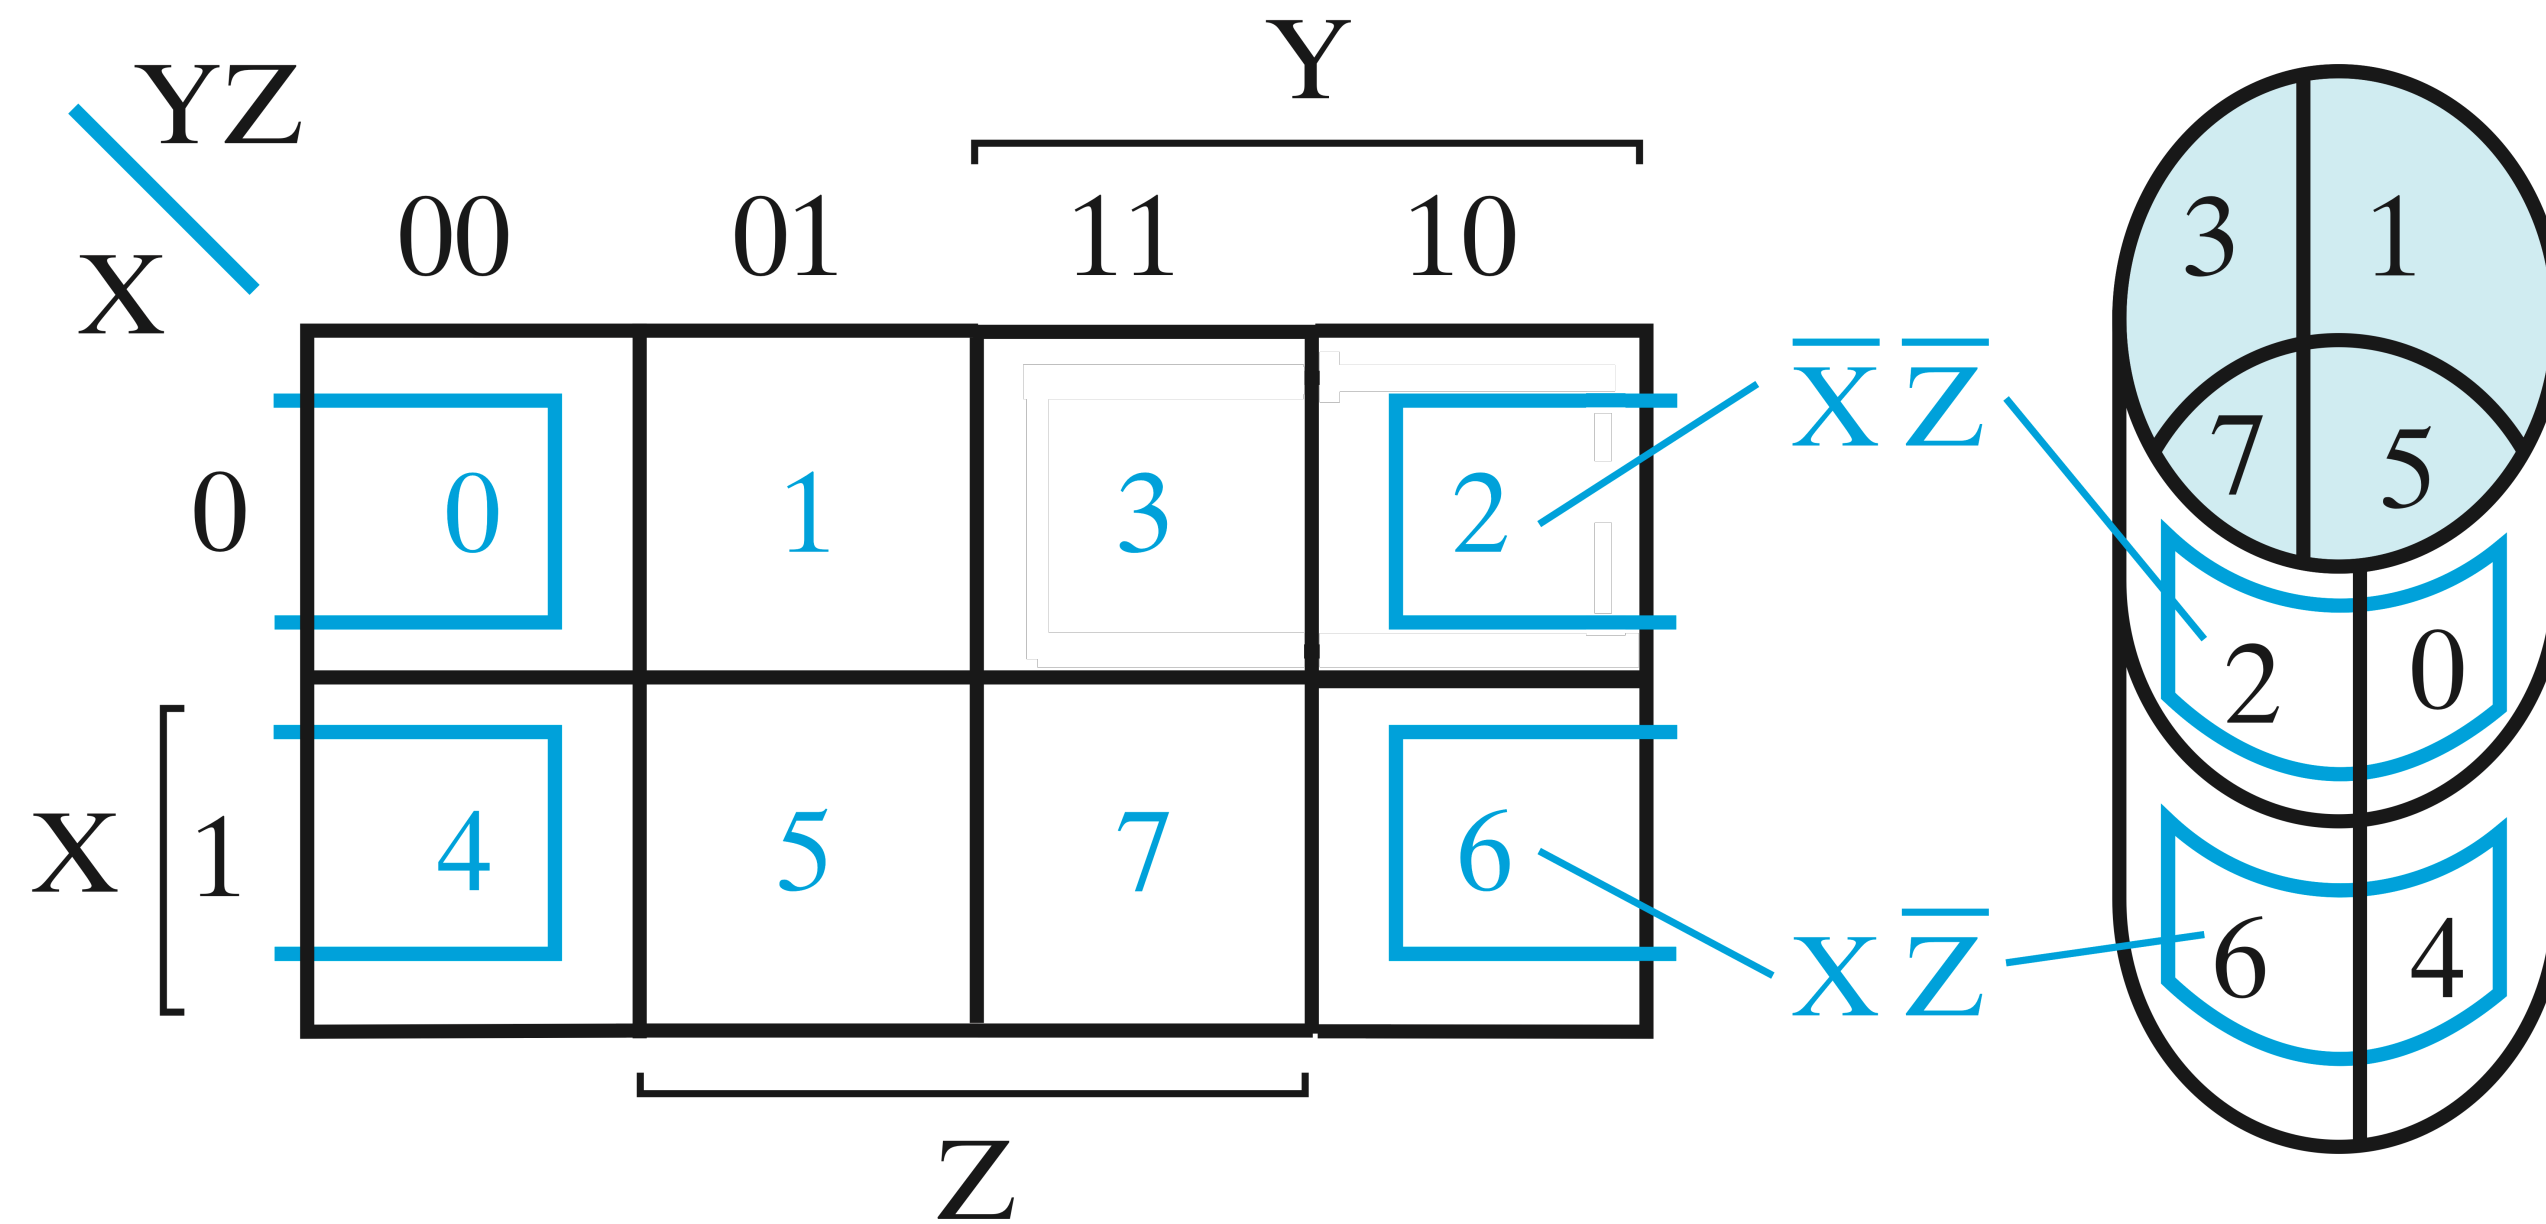

$$F(X, Y, Z) = \Sigma m(0, 2, 4, 5, 6)$$


Three Variable Maps Optimisation

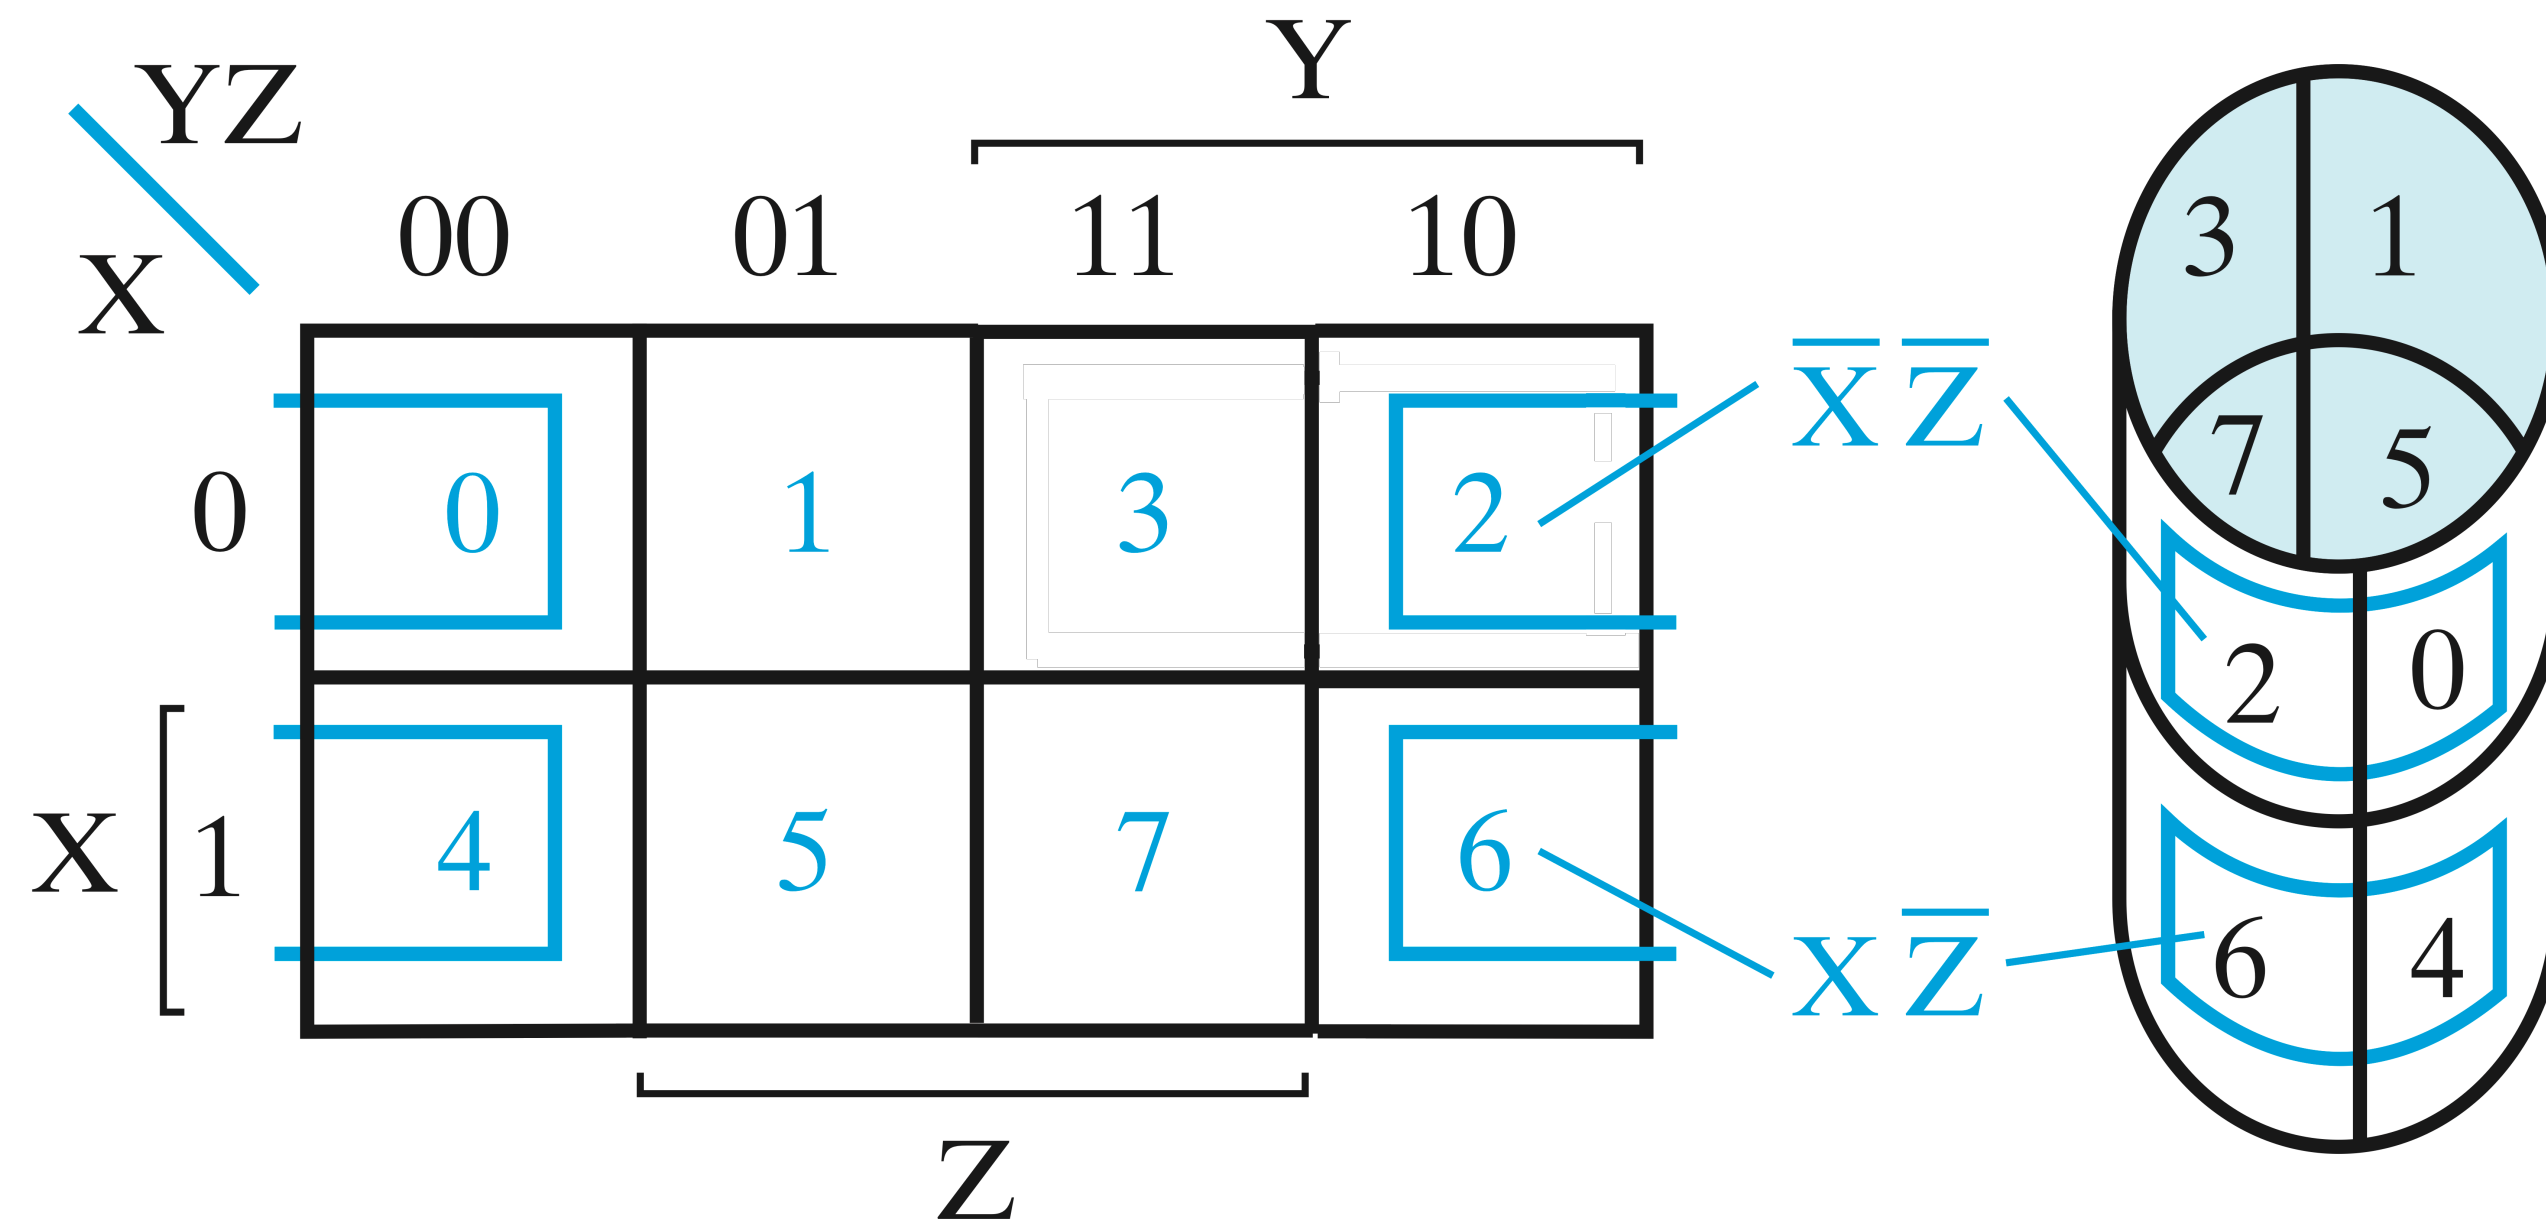

- Step 1: Enter the values

$$F(X, Y, Z) = \sum m(0, 2, 4, 5, 6)$$


Three Variable Maps Optimisation

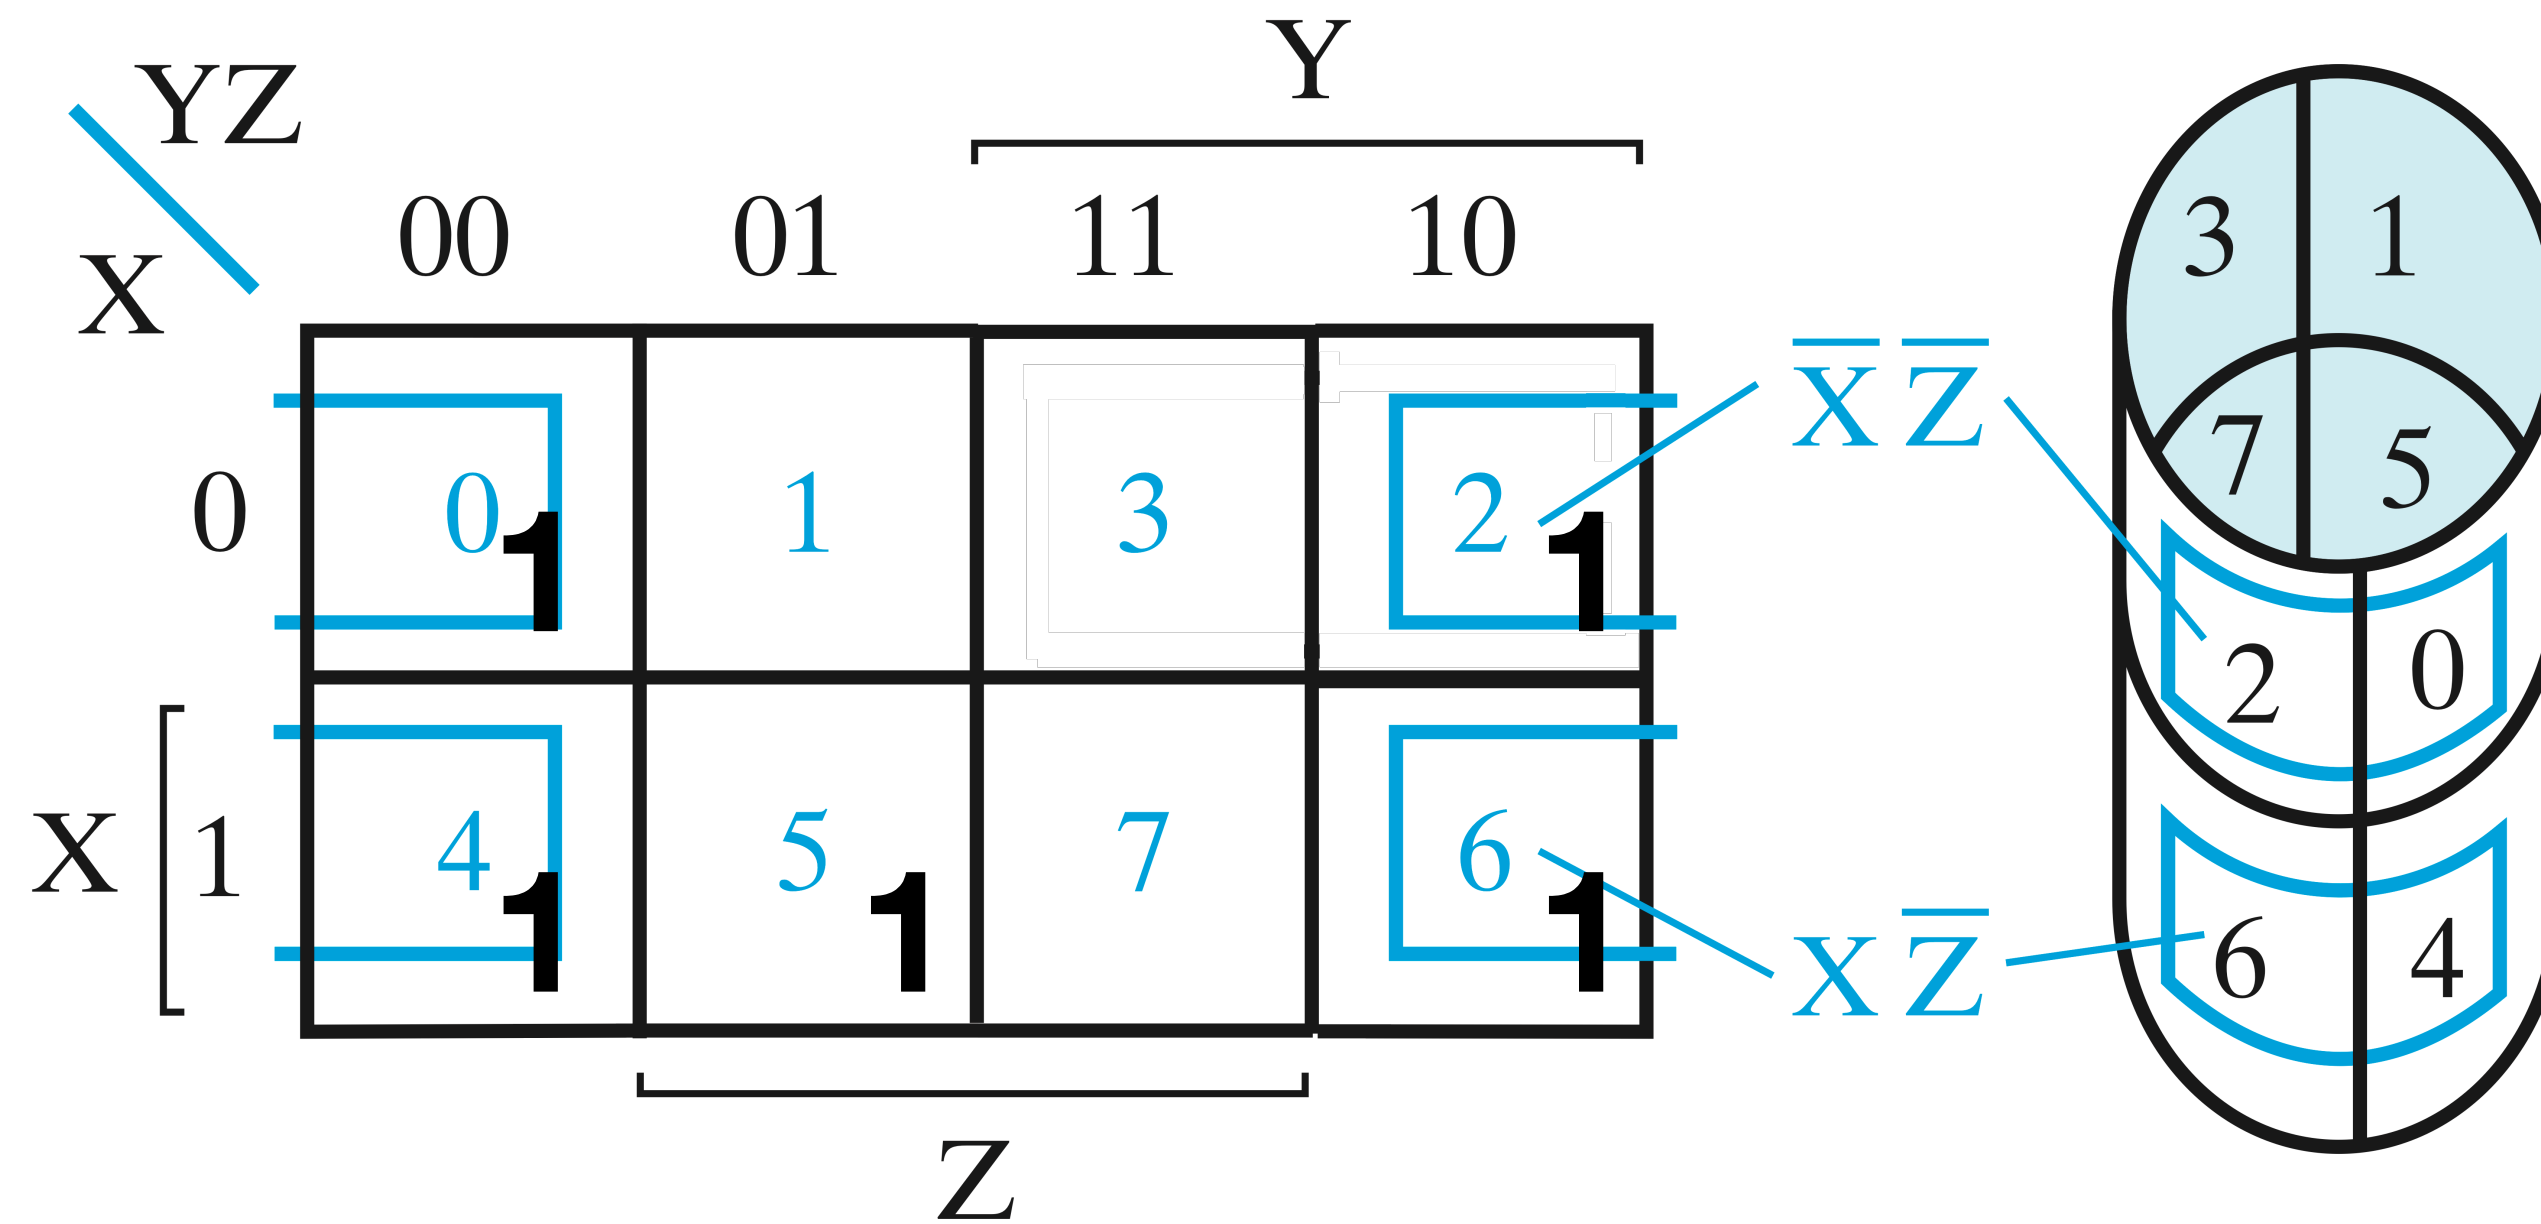

- Step 1: Enter the values

$$F(X, Y, Z) = \sum m(0, 2, 4, 5, 6)$$


Three Variable Maps Optimisation

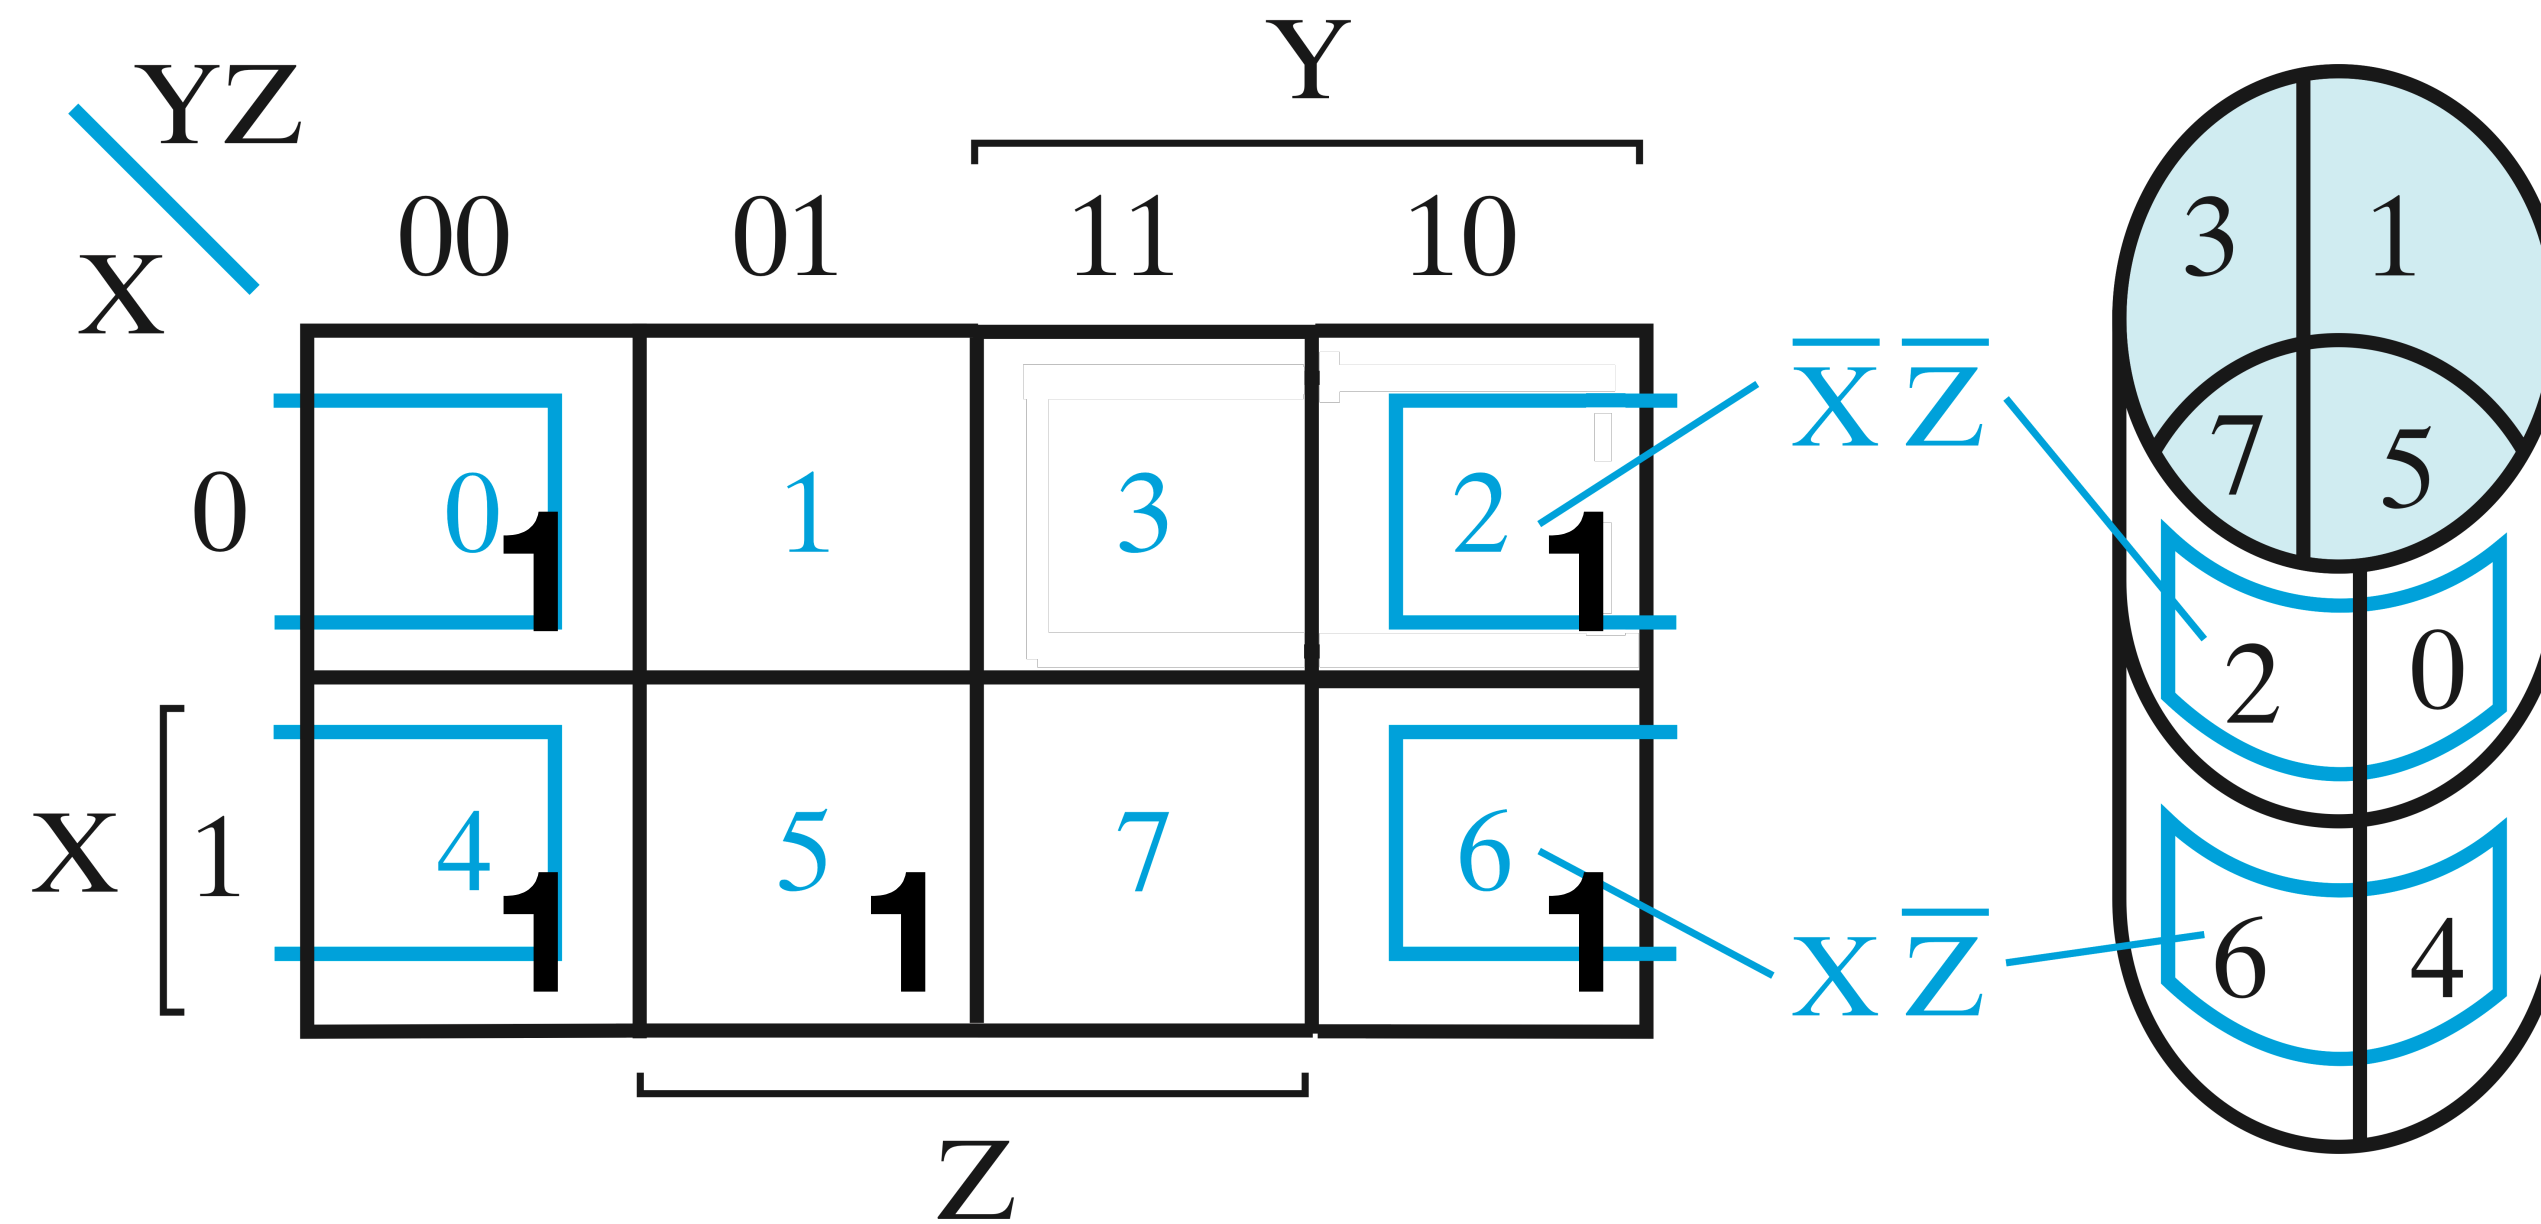

$$F(X, Y, Z) = \Sigma m(0, 2, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s


Three Variable Maps Optimisation

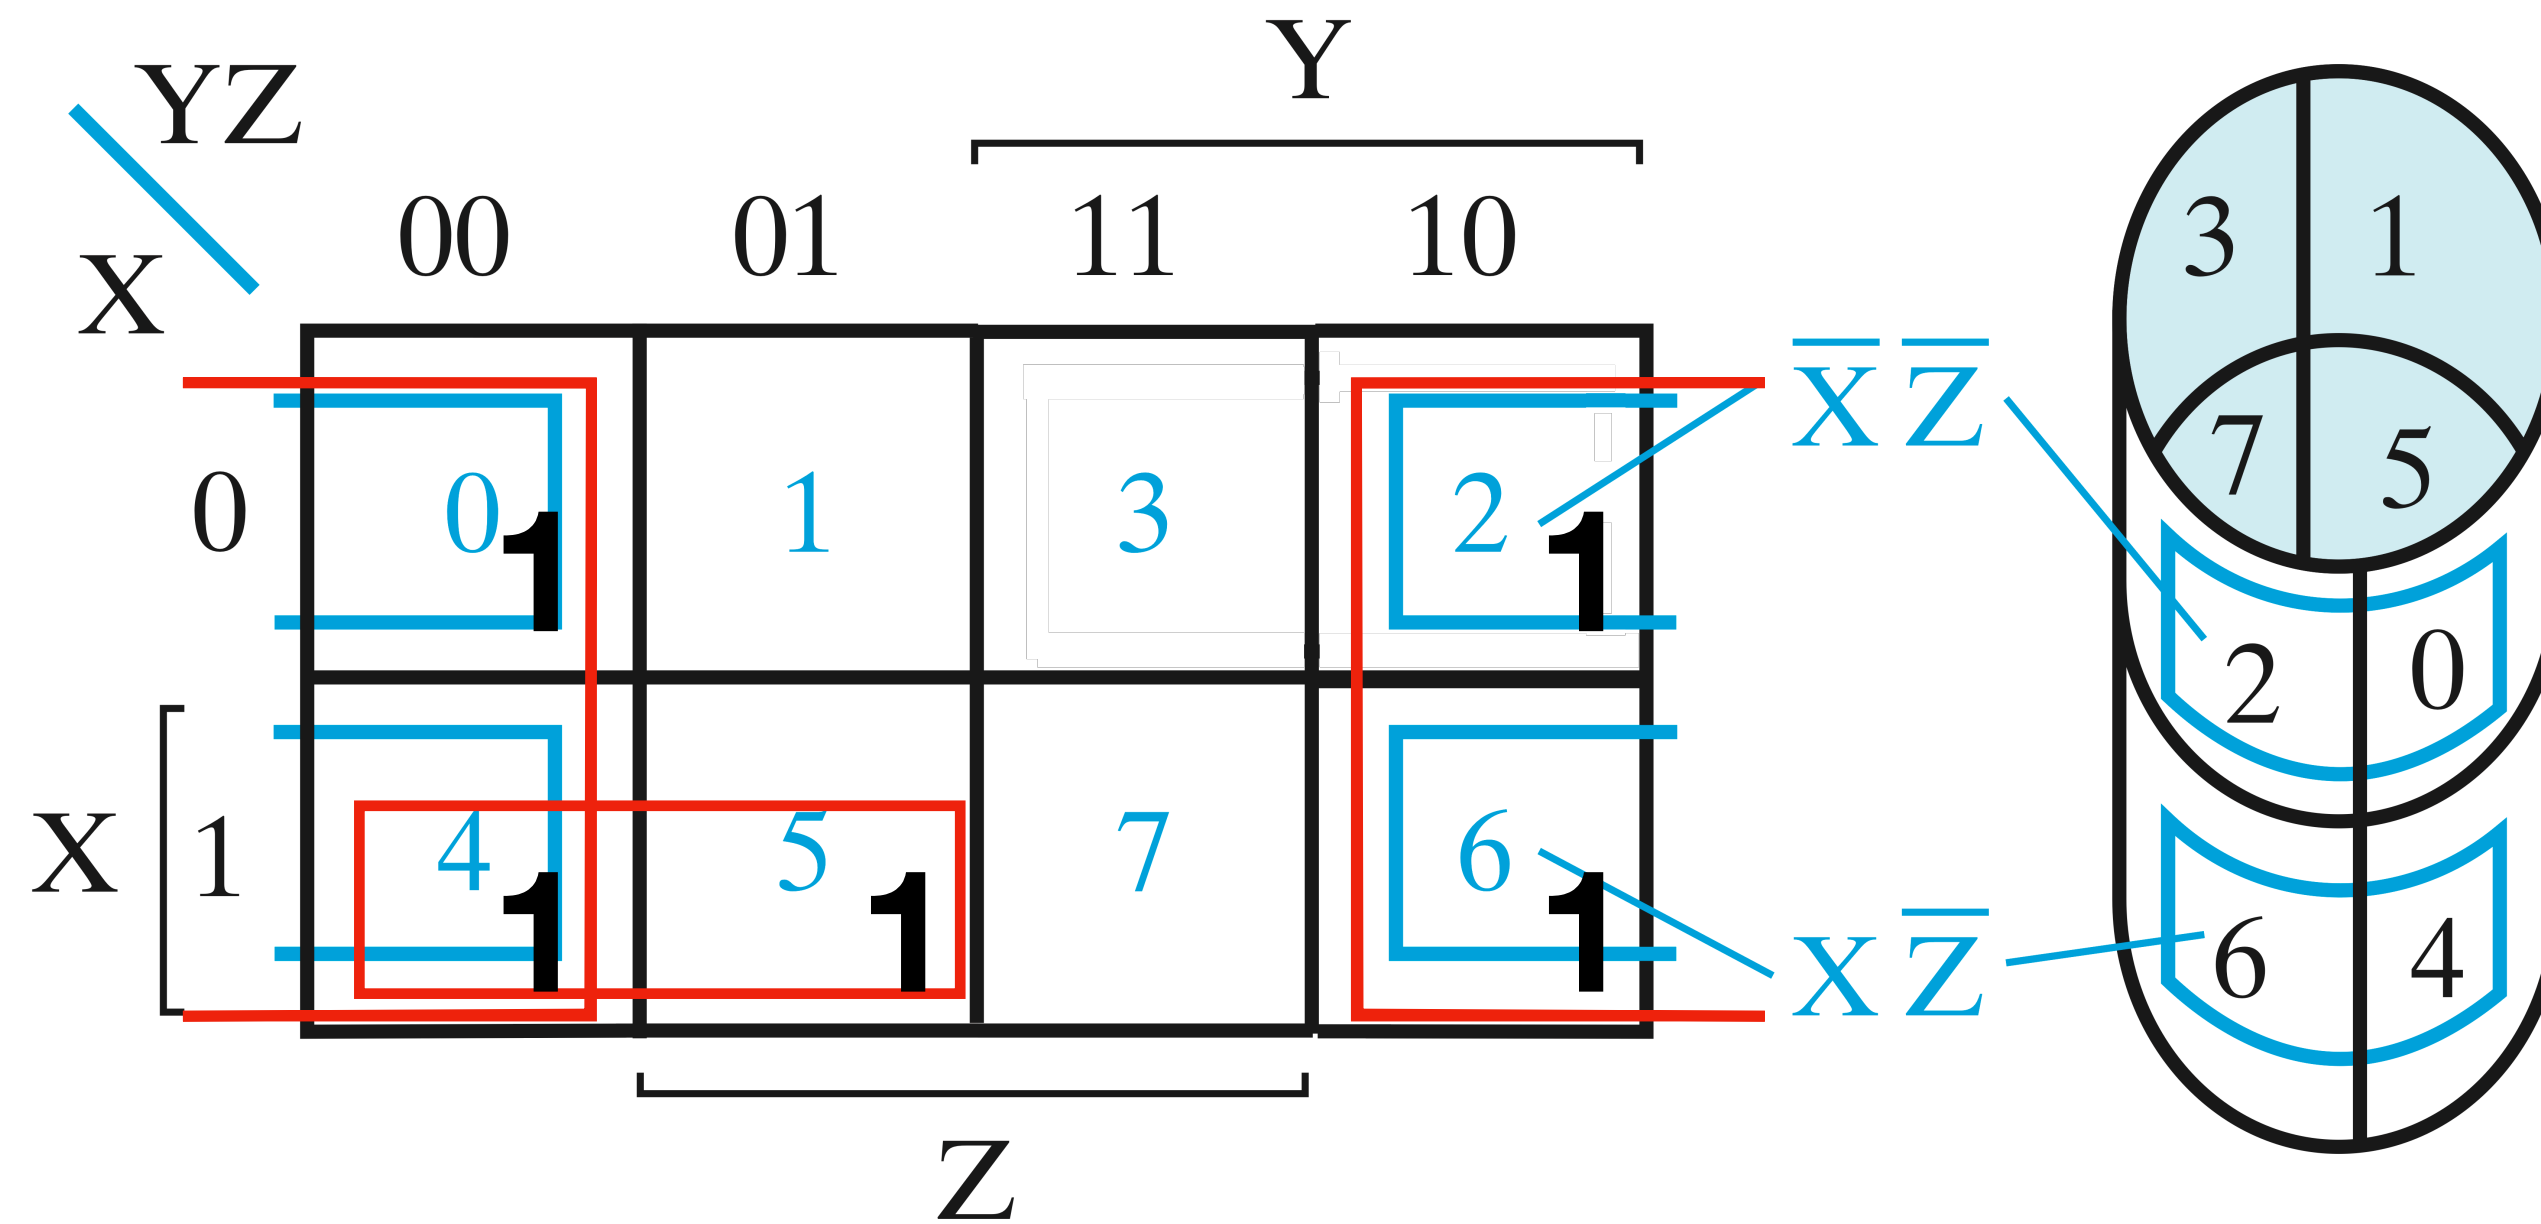

$$F(X, Y, Z) = \sum m(0, 2, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s


Three Variable Maps Optimisation

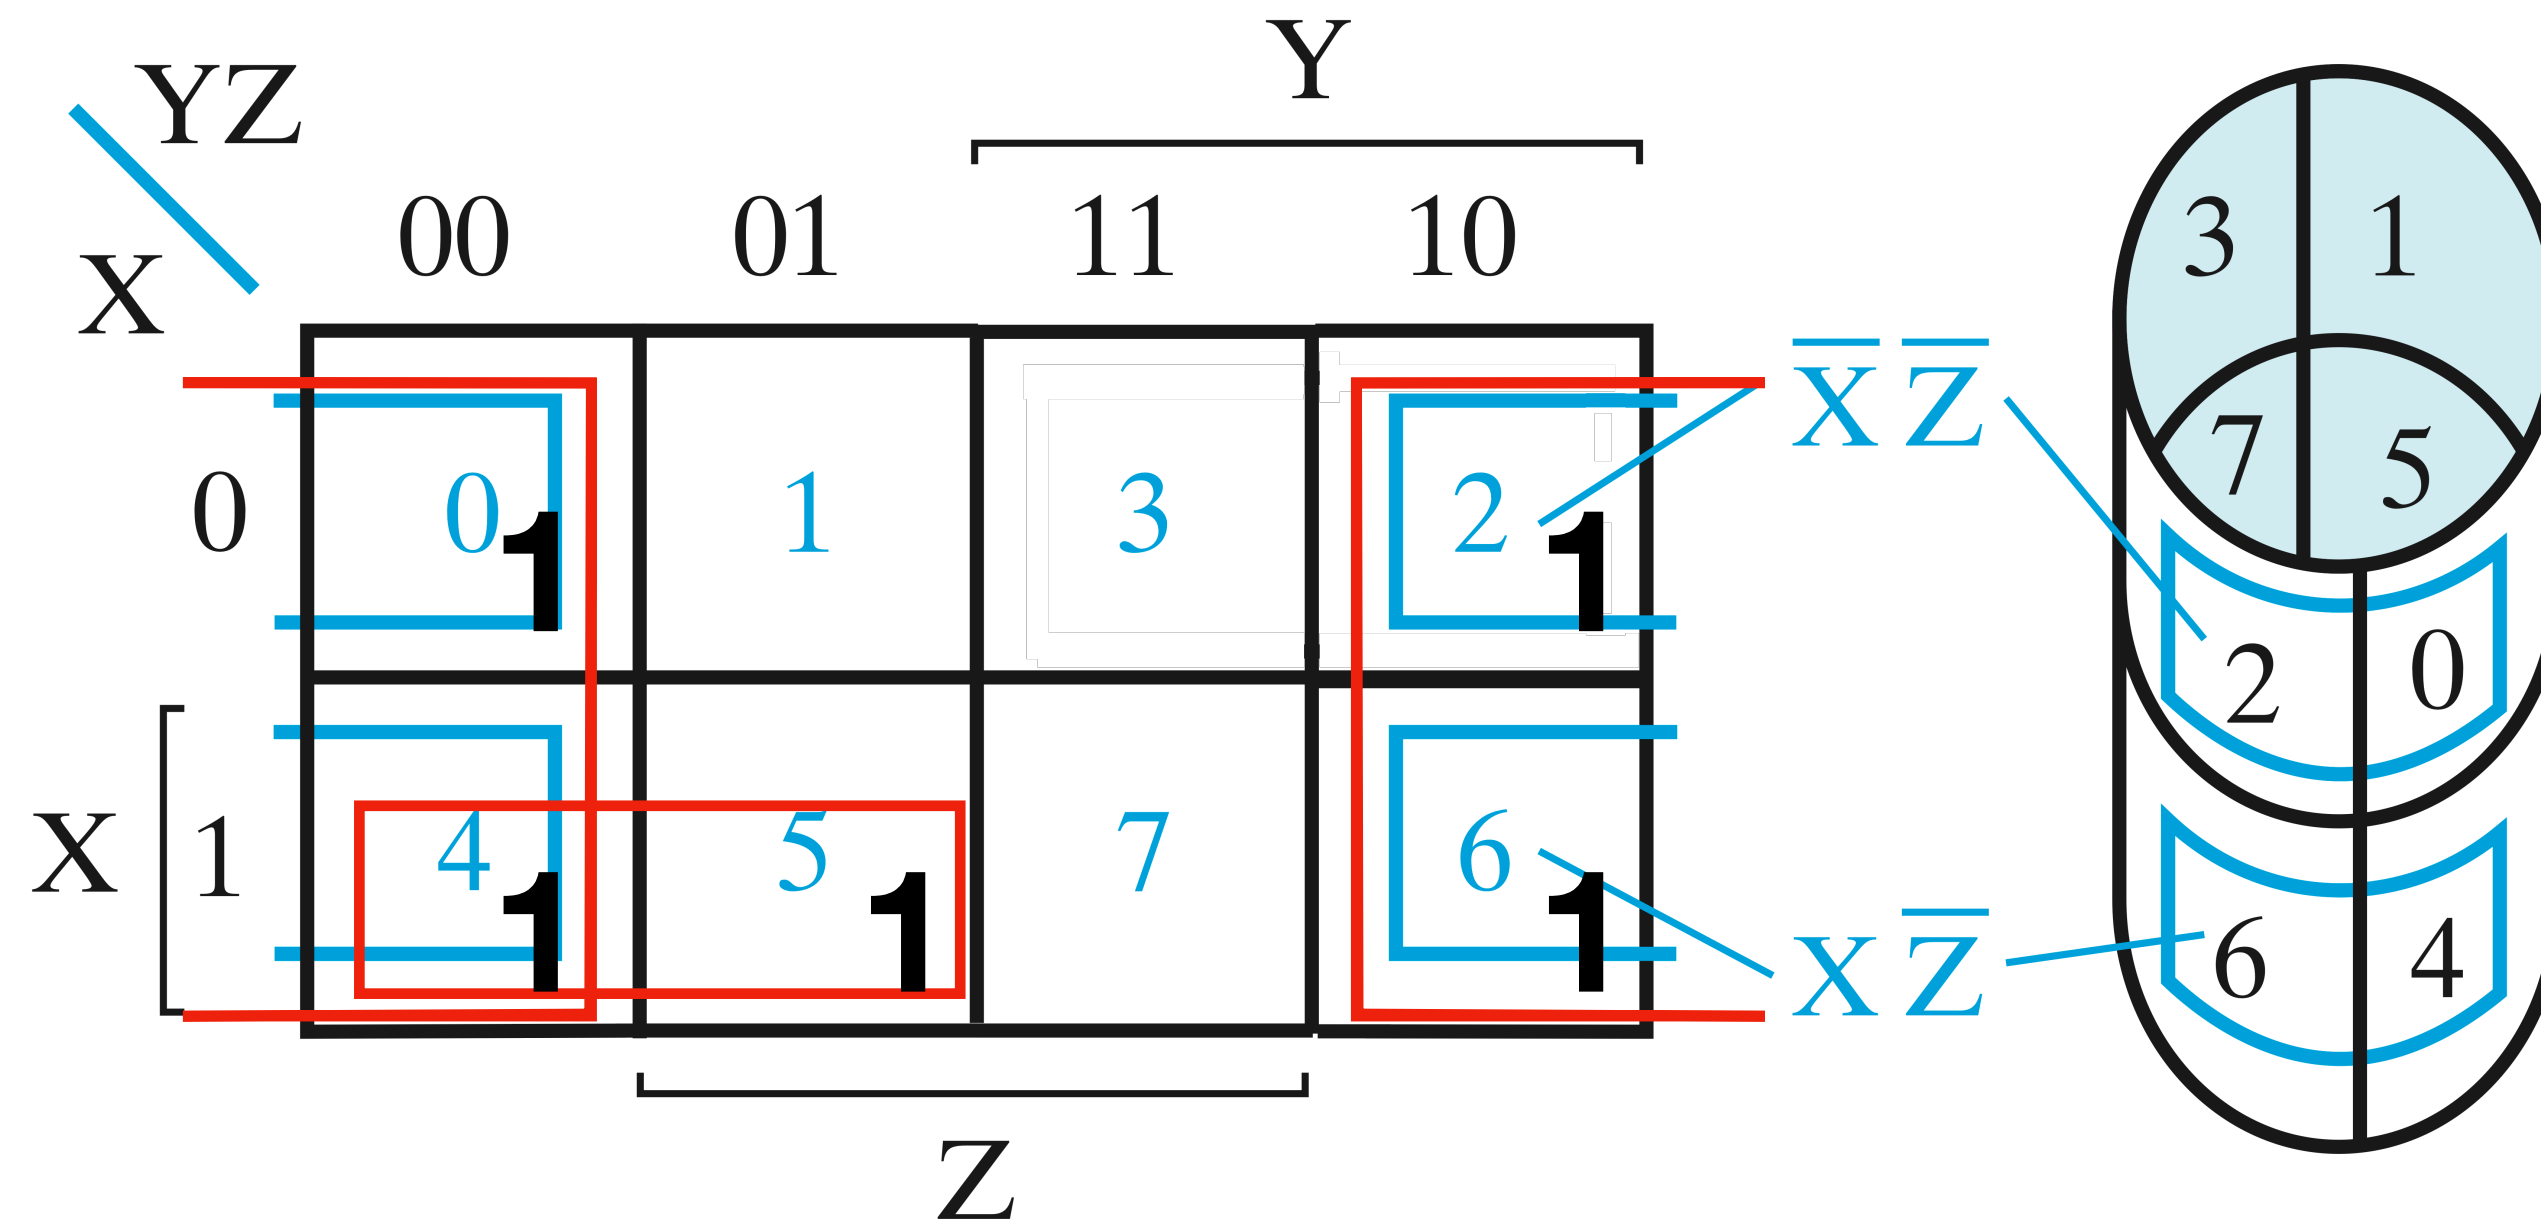

$$F(X, Y, Z) = \sum m(0, 2, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Three Variable Maps Optimisation

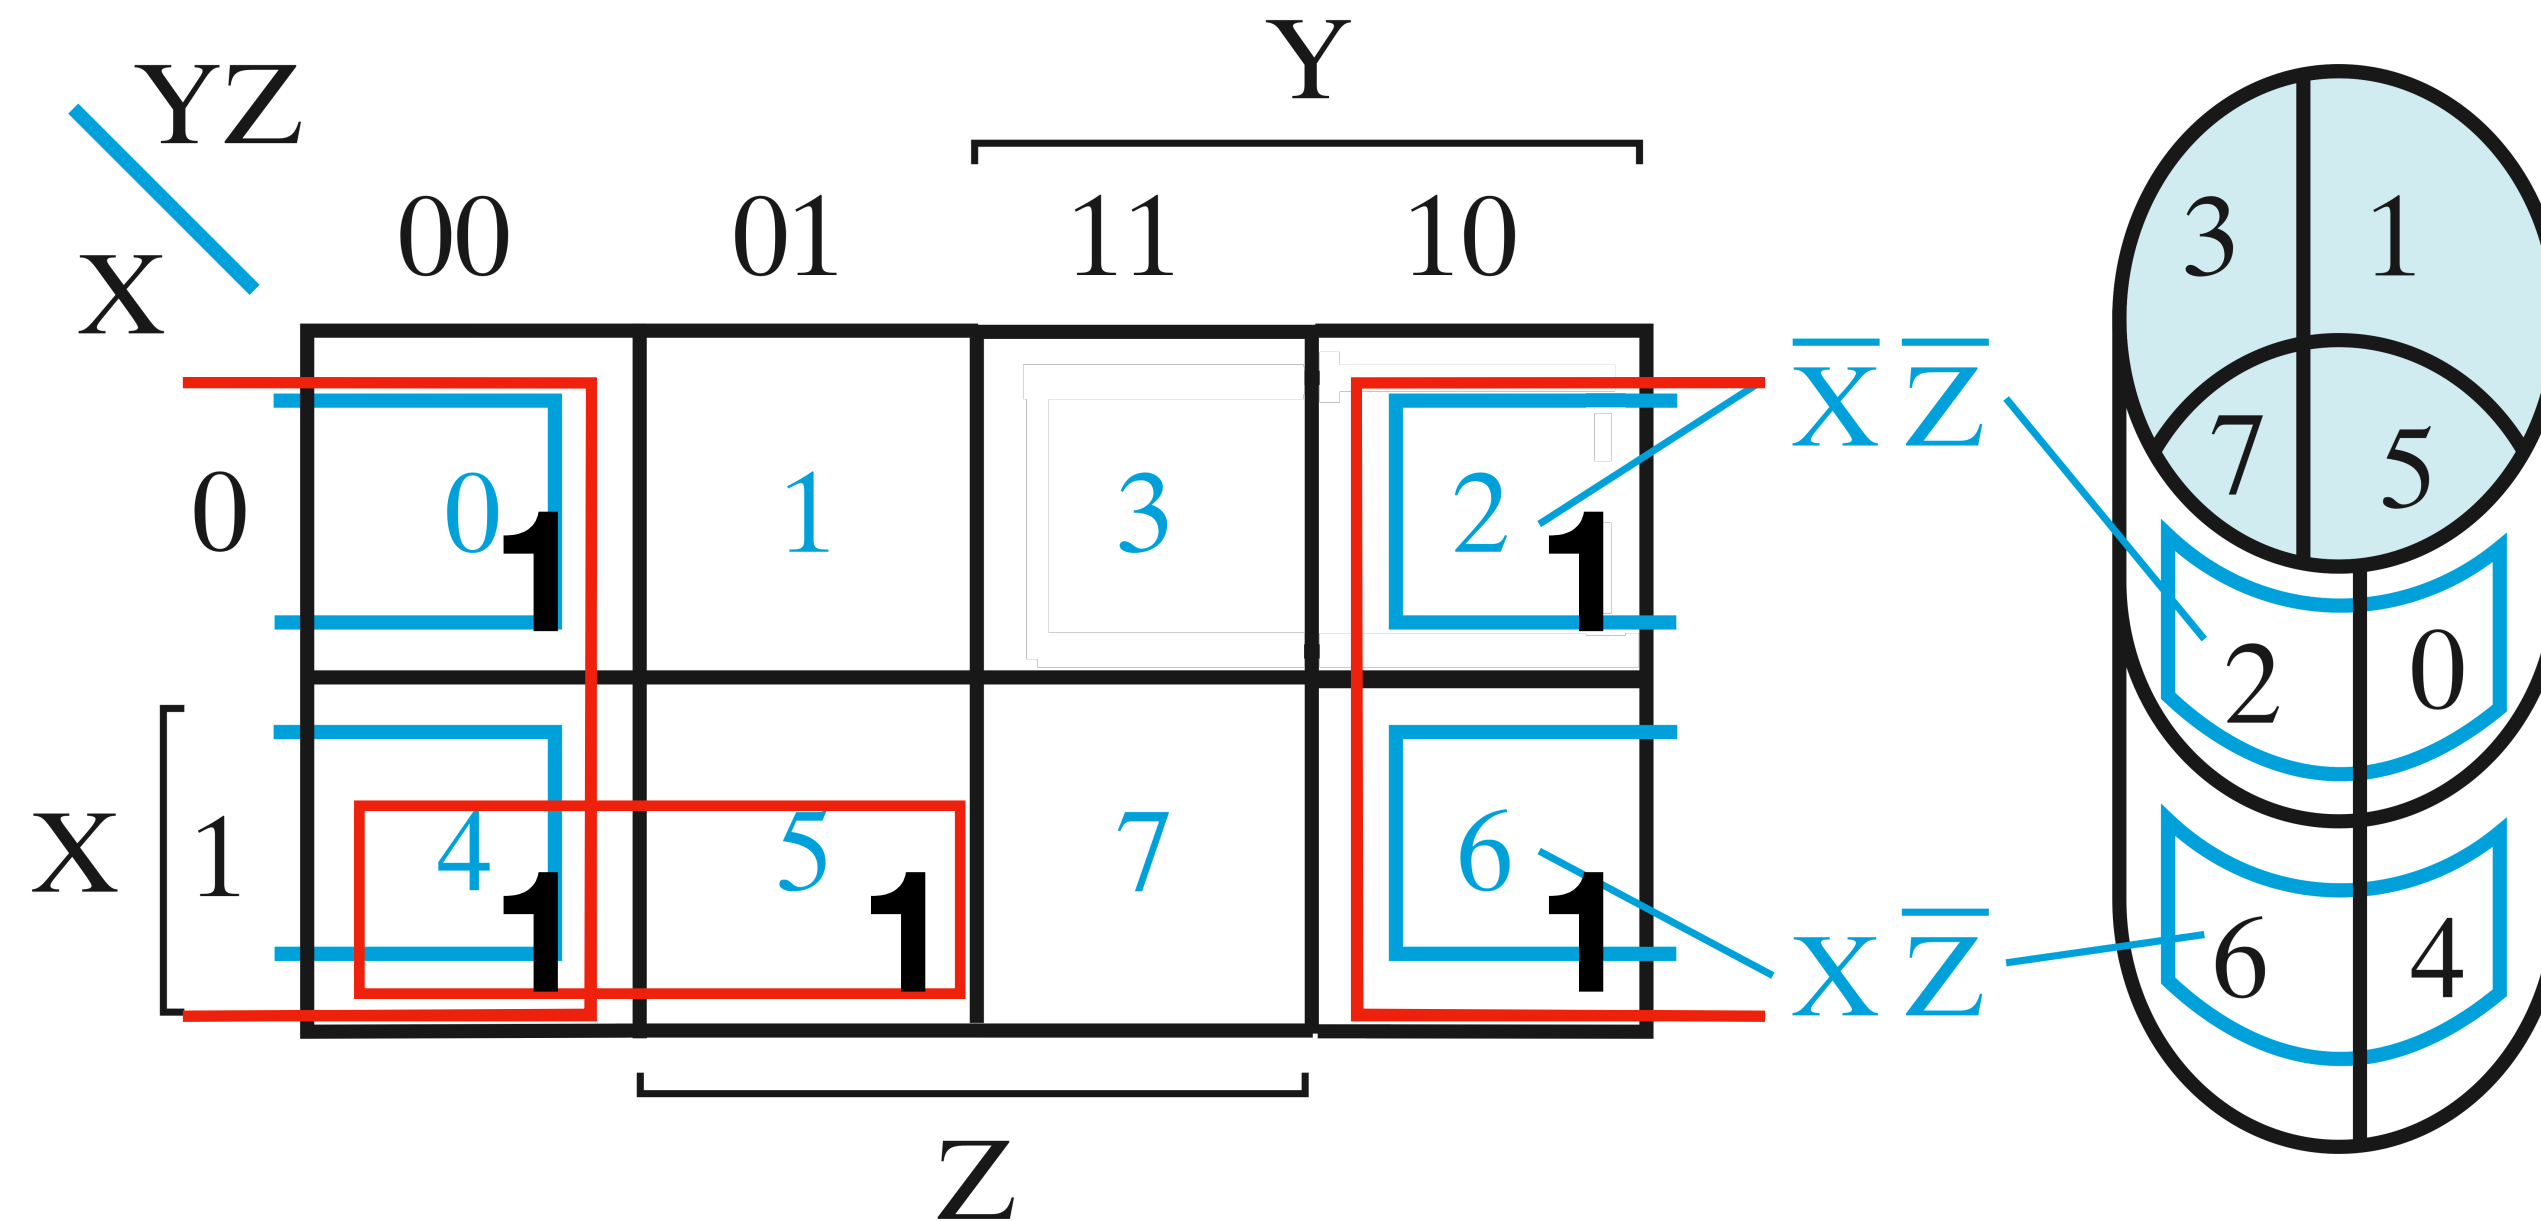


$$F(X, Y, Z) = \sum m(0, 2, 4, 5, 6)$$

$$= X\bar{Y} + \bar{Z}$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split


Three Variable Maps Optimisation

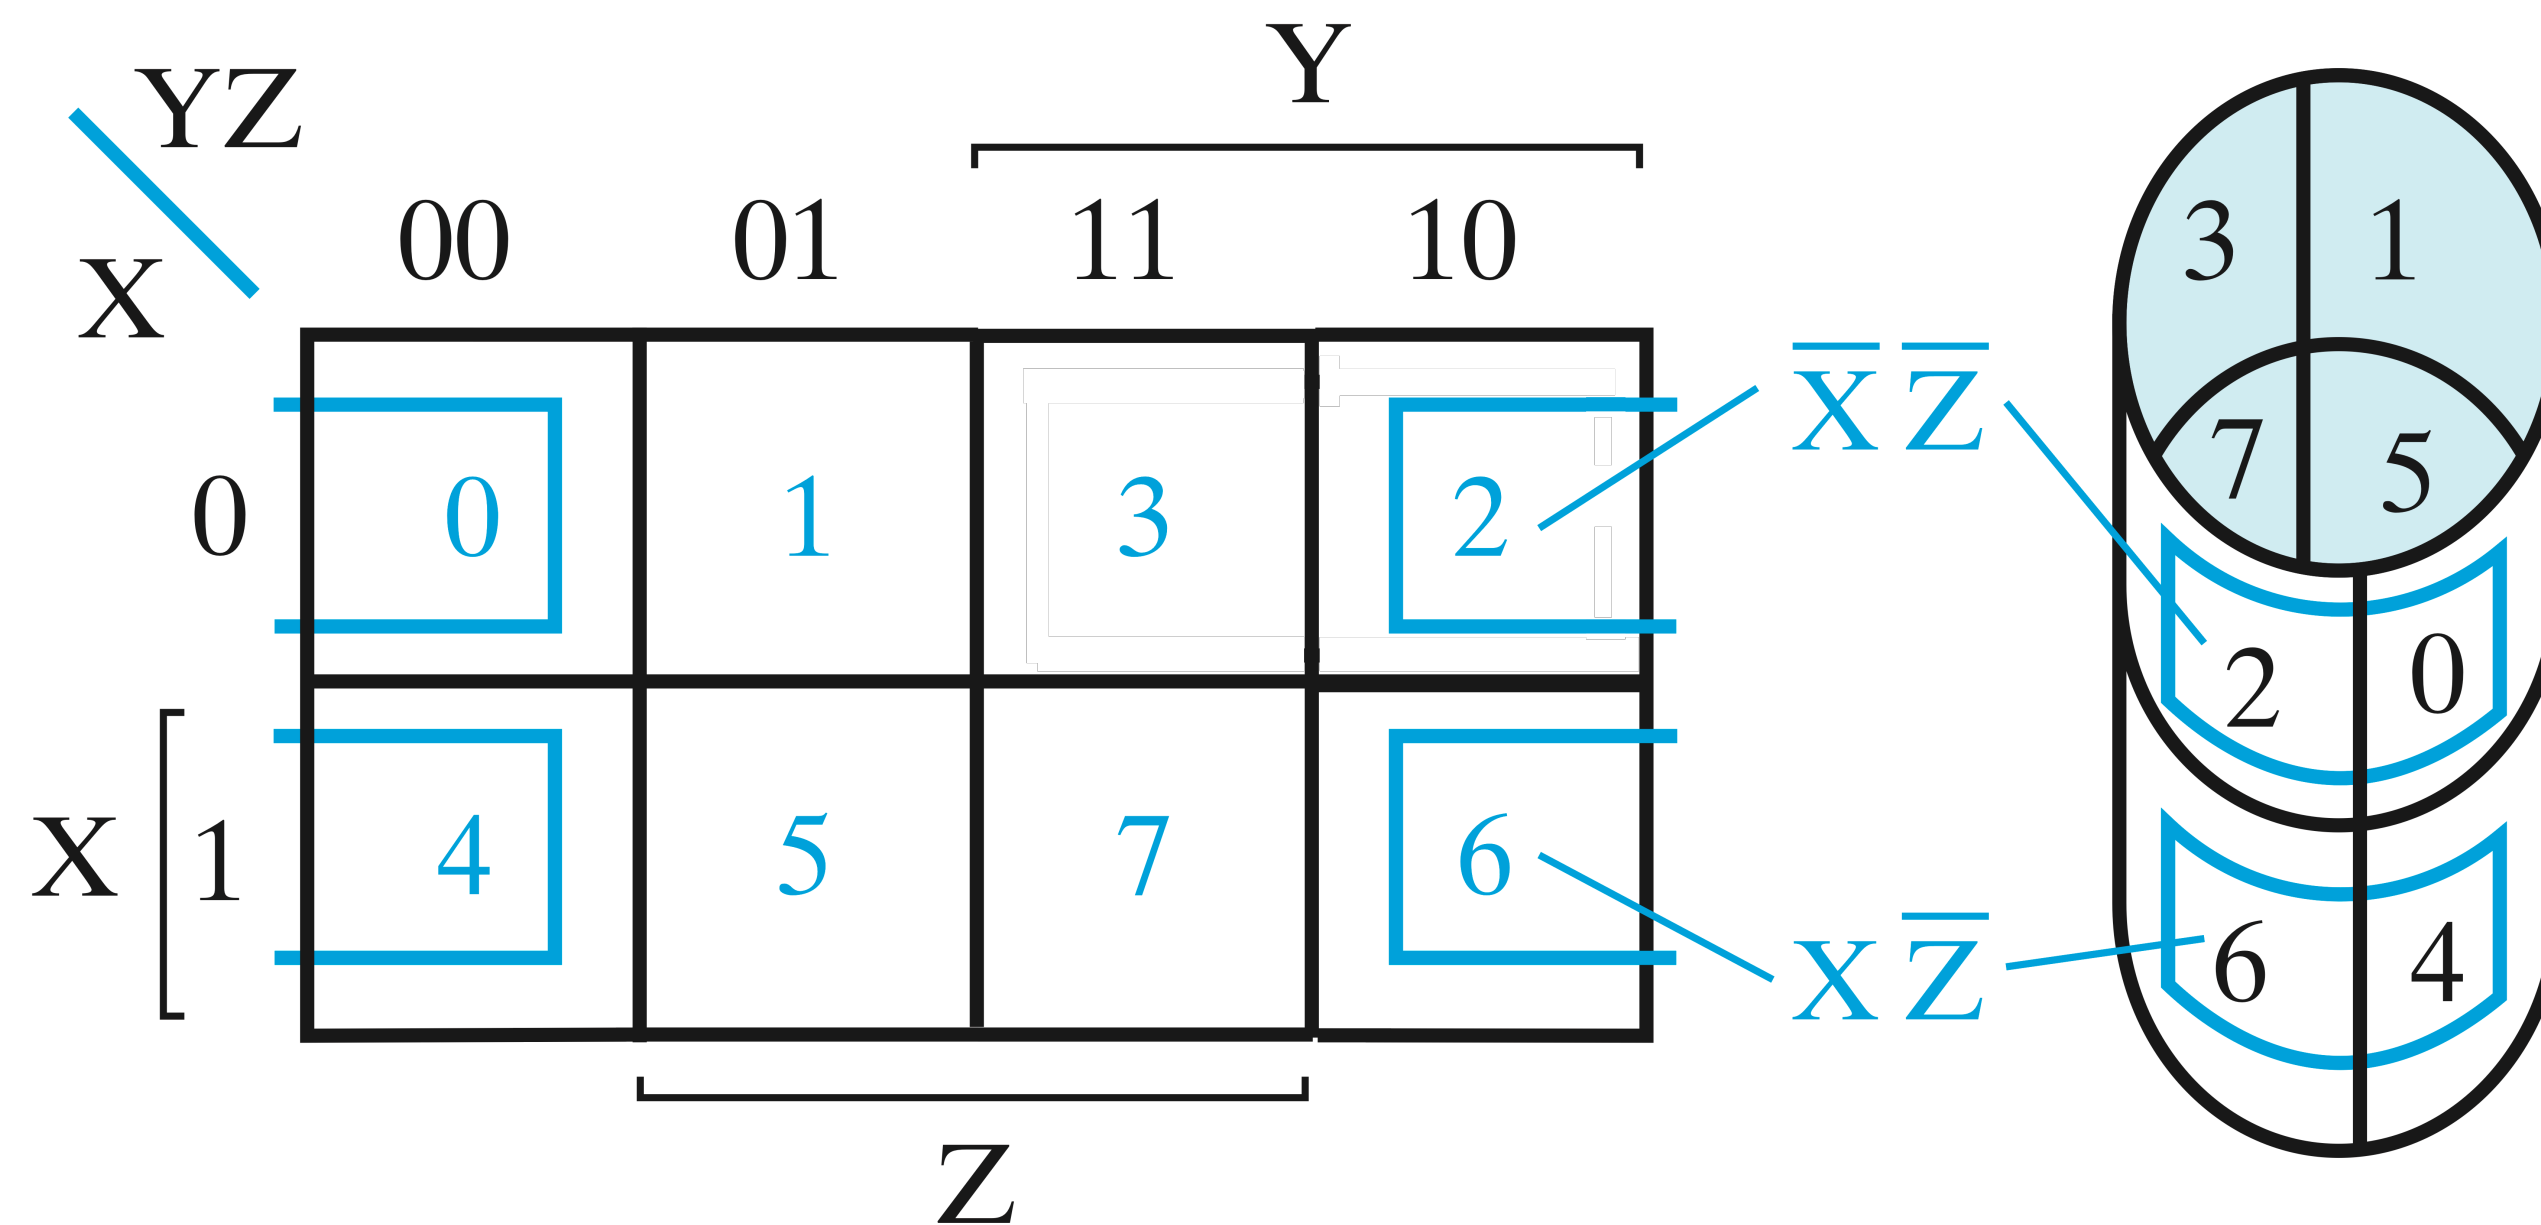

$$F(X, Y, Z) = \sum m(1, 3, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split


Three Variable Maps Optimisation

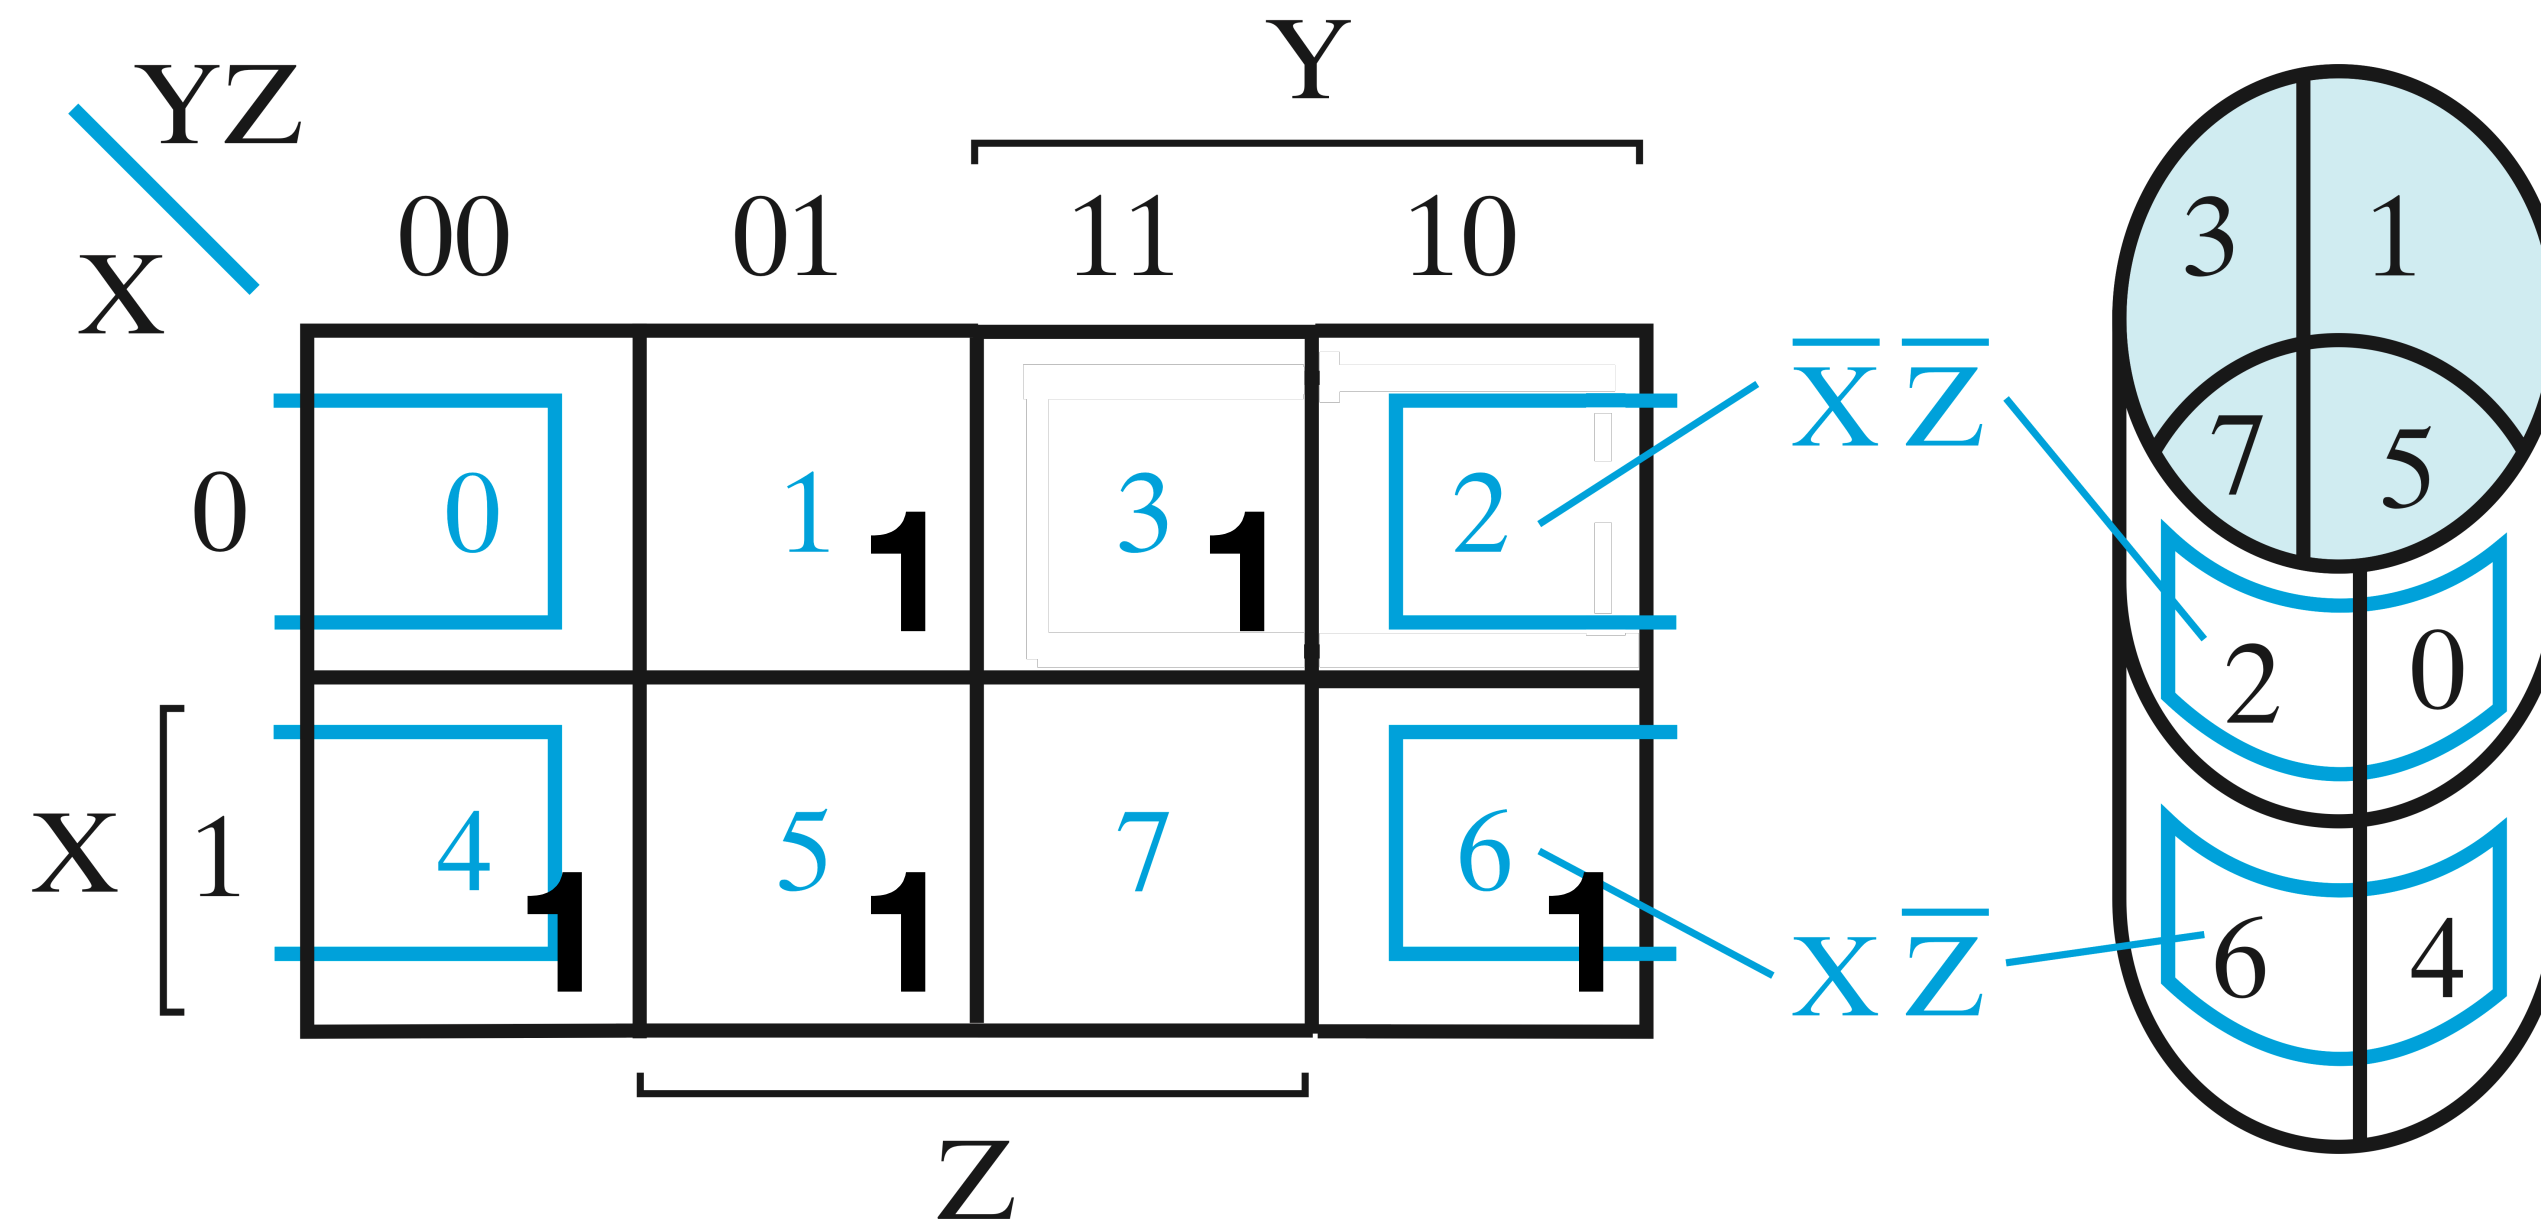

$$F(X, Y, Z) = \Sigma m(1, 3, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Three Variable Maps Optimisation

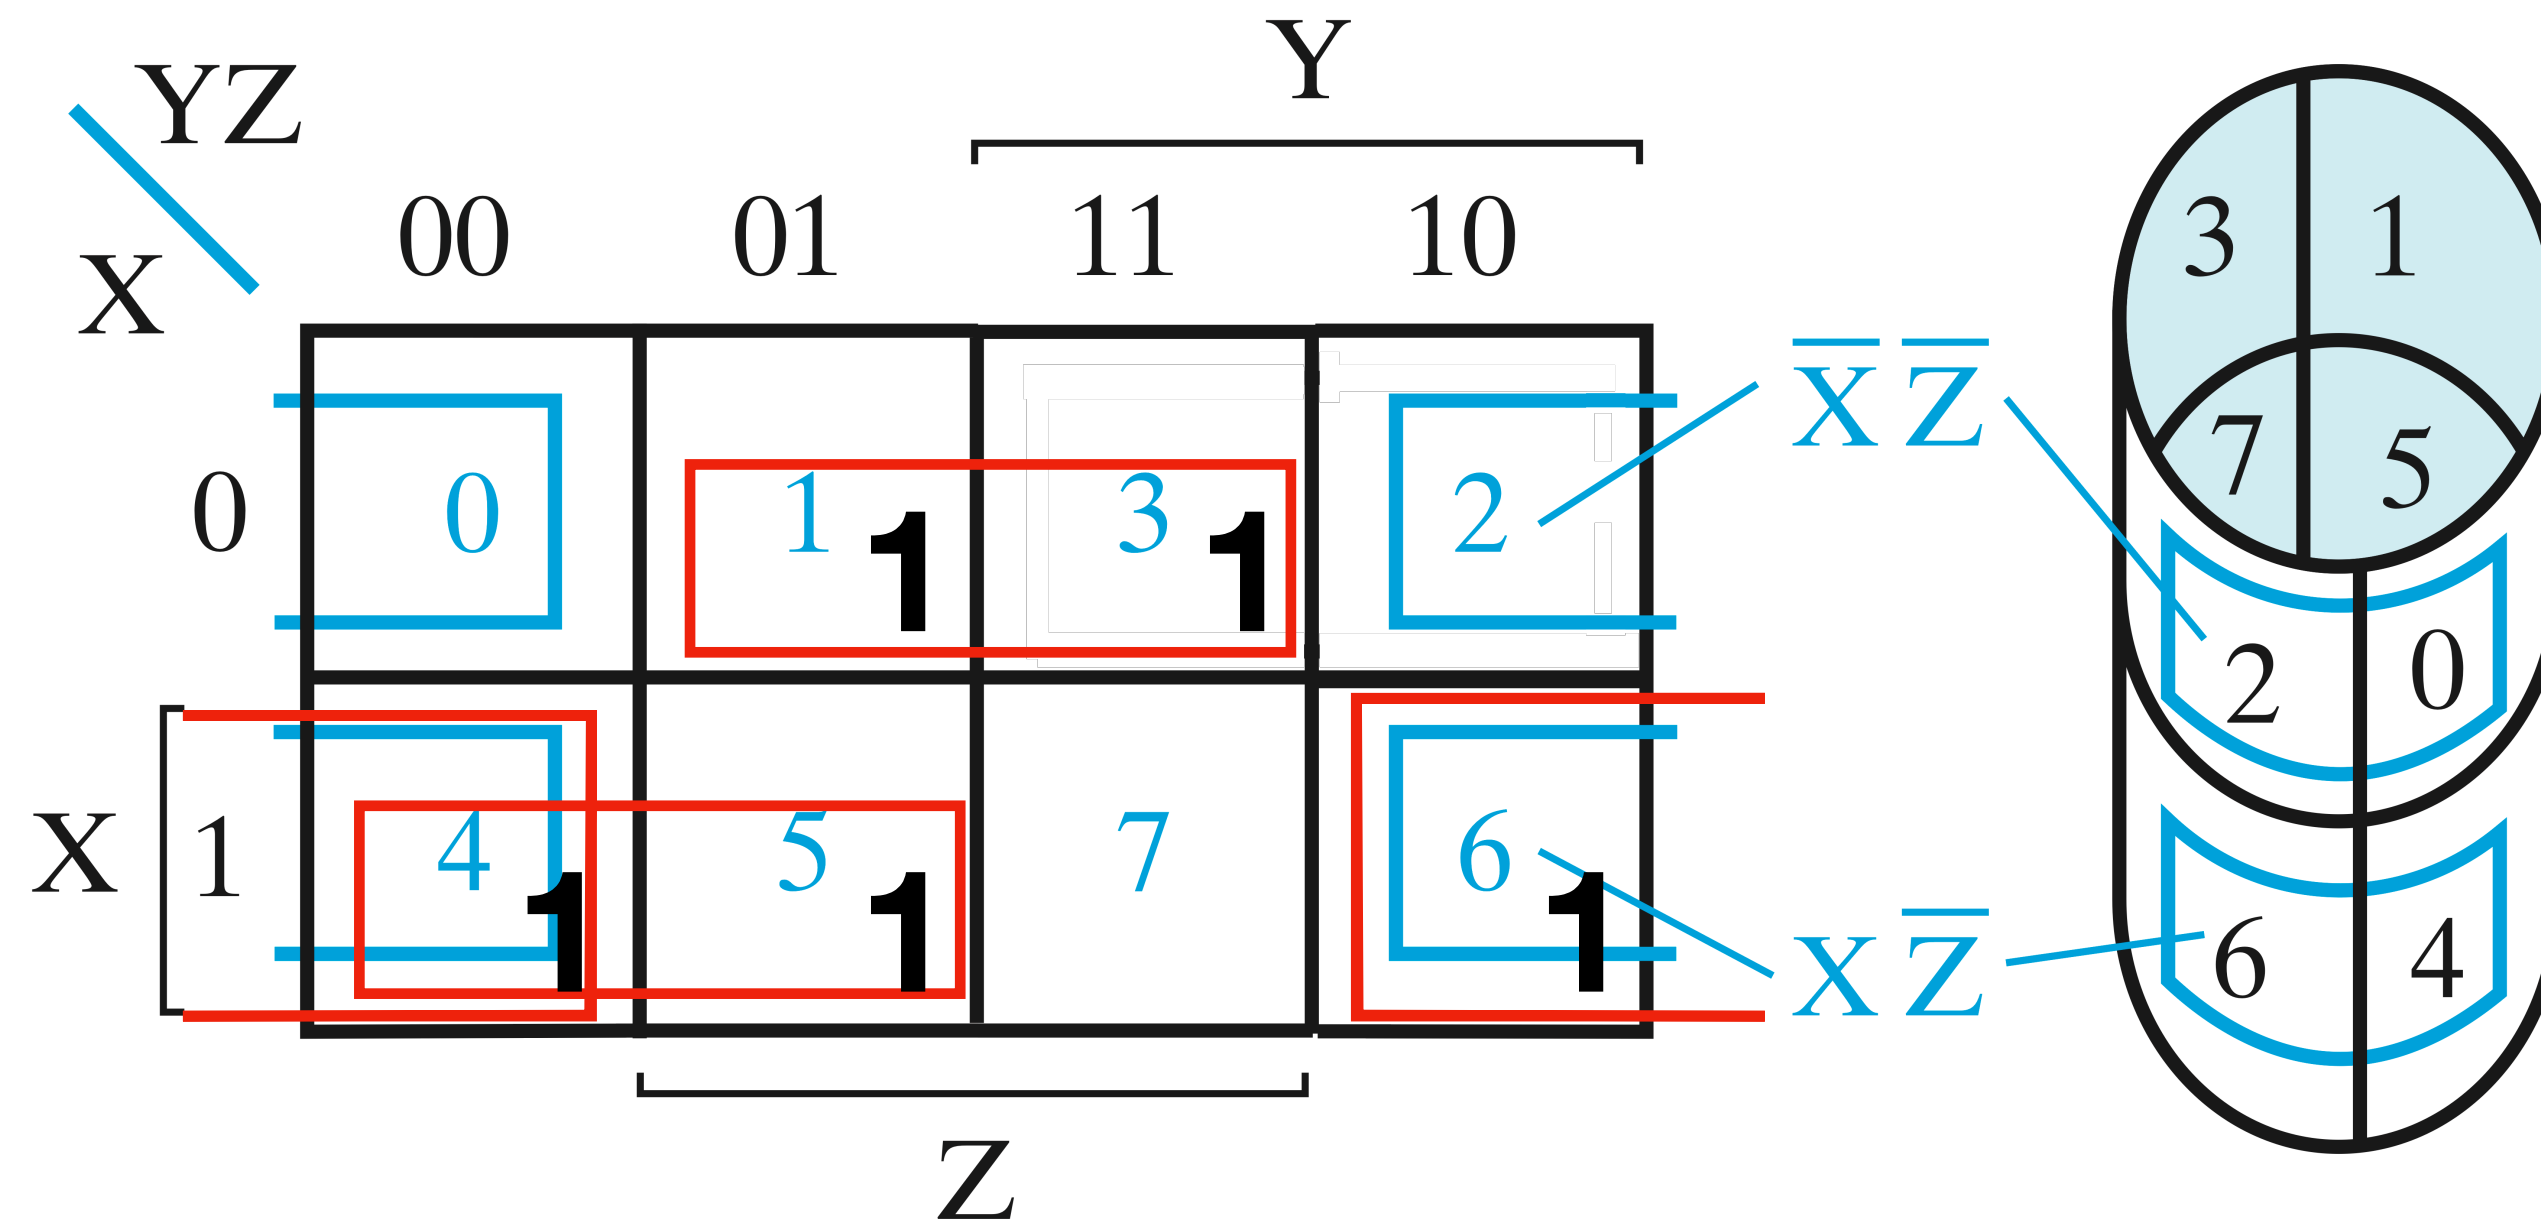

$$F(X, Y, Z) = \Sigma m(1, 3, 4, 5, 6)$$

$$= \bar{X}Z + X\bar{Y} + X\bar{Z}$$


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Four Variable Maps Optimisation

		Y			
		00	01	11	10
W	00	0	1	3	2
	01	4	5	7	6
	11	12	13	15	14
	10	8	9	11	10

YZ
WX
X
Z
 $\bar{X}\bar{Z}$

$$F(W, X, Y, Z) = \sum m(0, 1, 2, 4, 5, 6, 8, 9, 10, 12, 13)$$

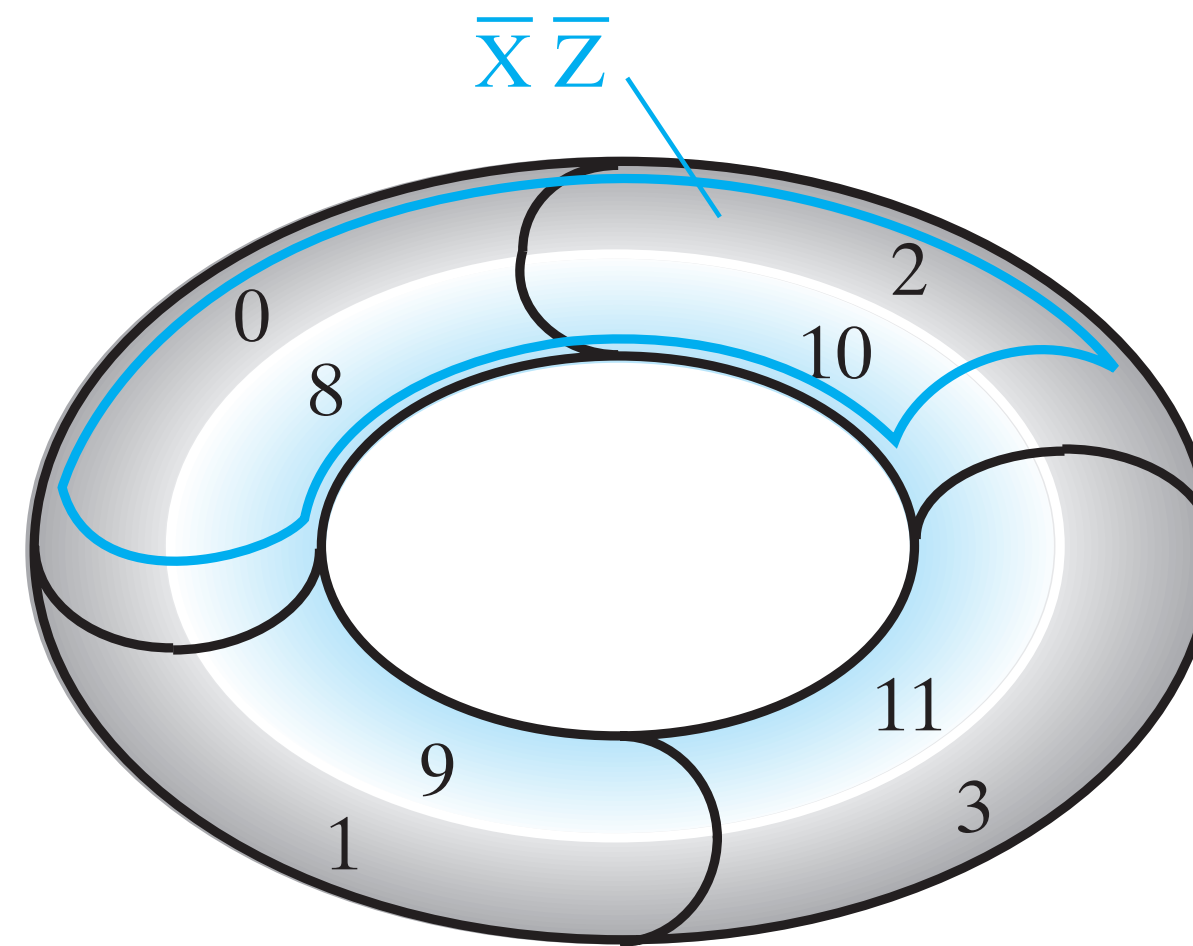


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Four Variable Maps Optimisation

		Y			
		00	01	11	10
W	00	1	1	3	2
	01	4	1	7	6
	11	12	13	15	14
	10	8	9	11	10


YZ
WX
X
Z
 $\bar{X}\bar{Z}$

$$F(W, X, Y, Z) = \sum m(0, 1, 2, 4, 5, 6, 8, 9, 10, 12, 13)$$

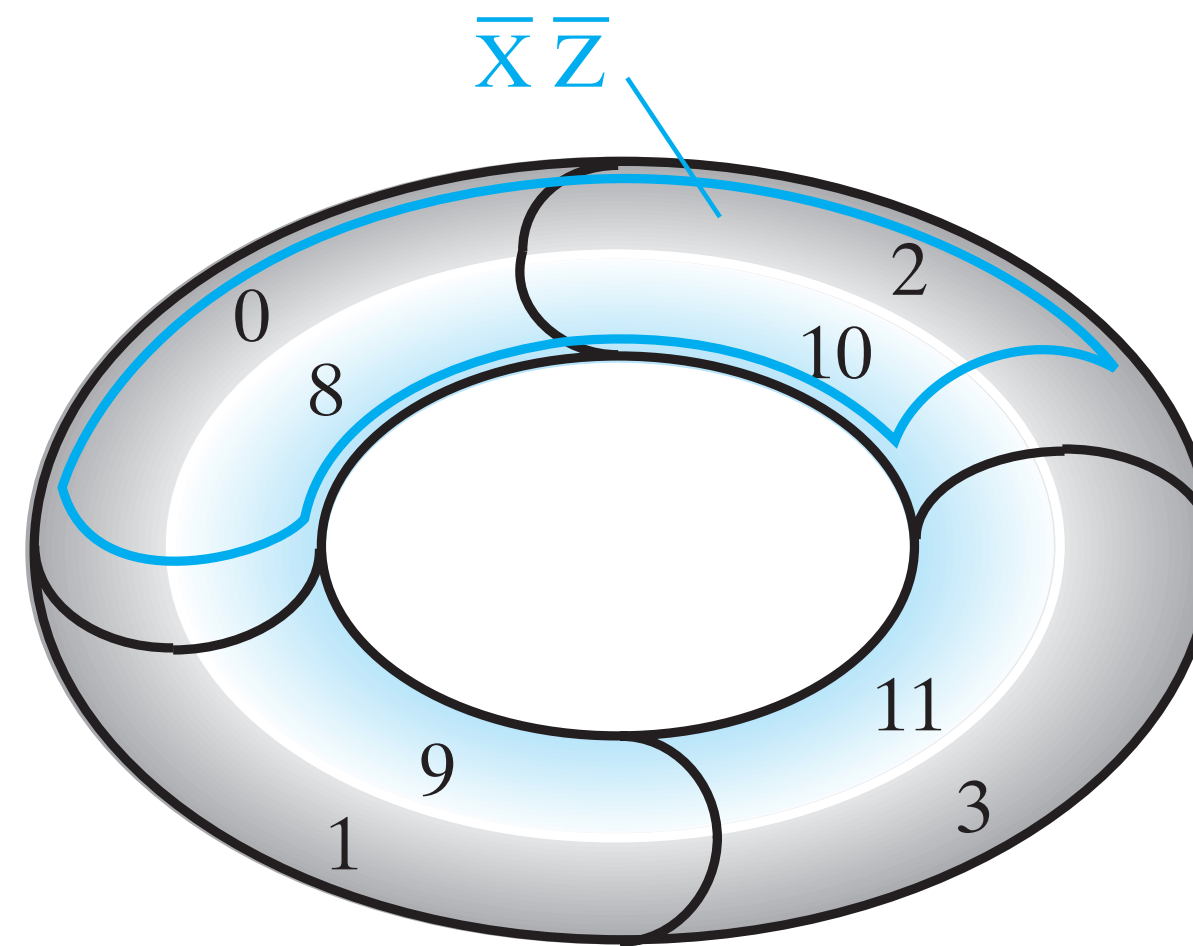


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Four Variable Maps Optimisation


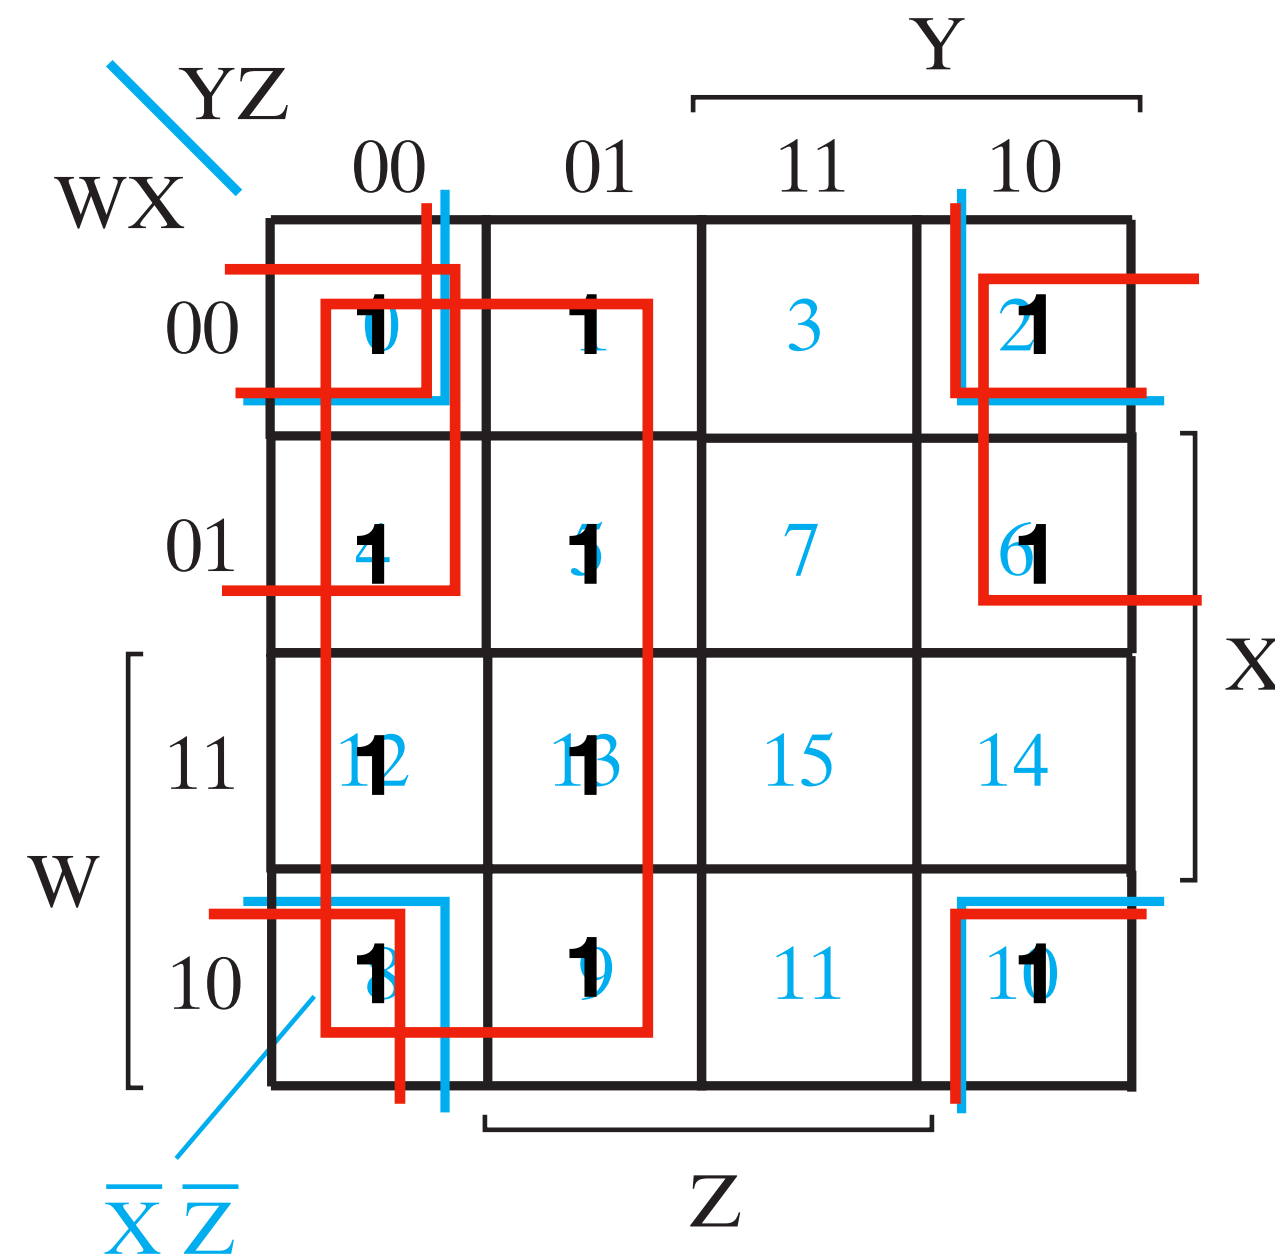


$$F(W, X, Y, Z) = \Sigma m(0,1,2,4,5,6,8,9,10,12,13)$$

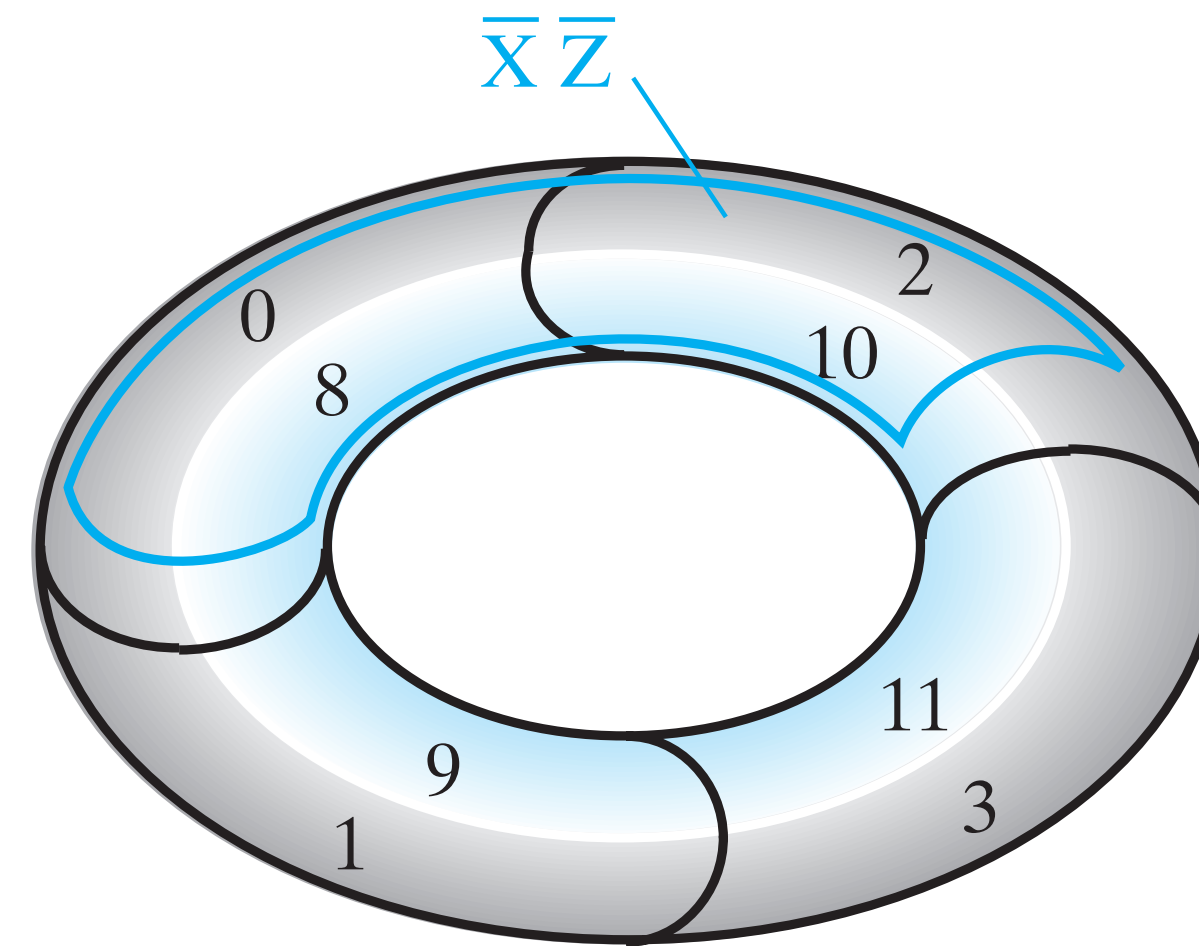

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Four Variable Maps Optimisation

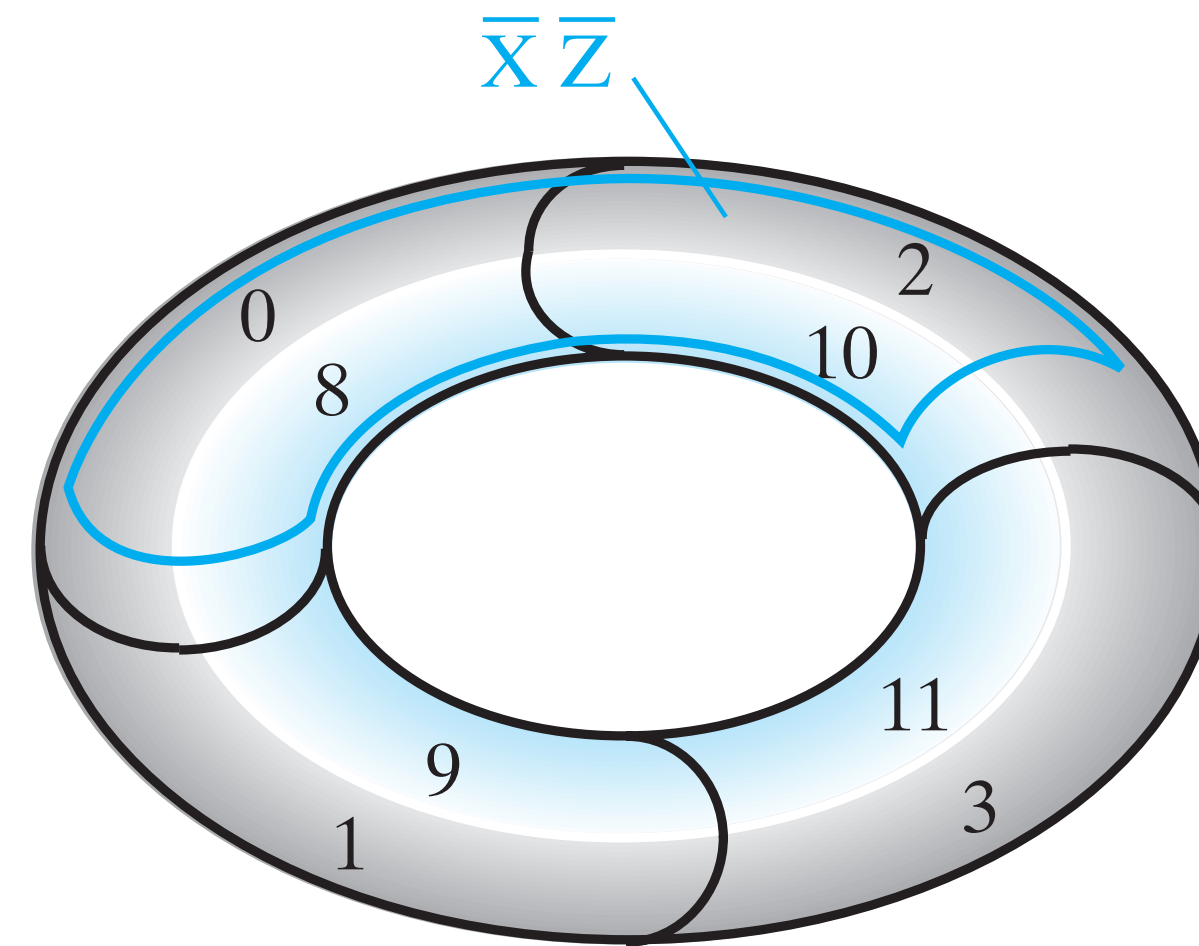
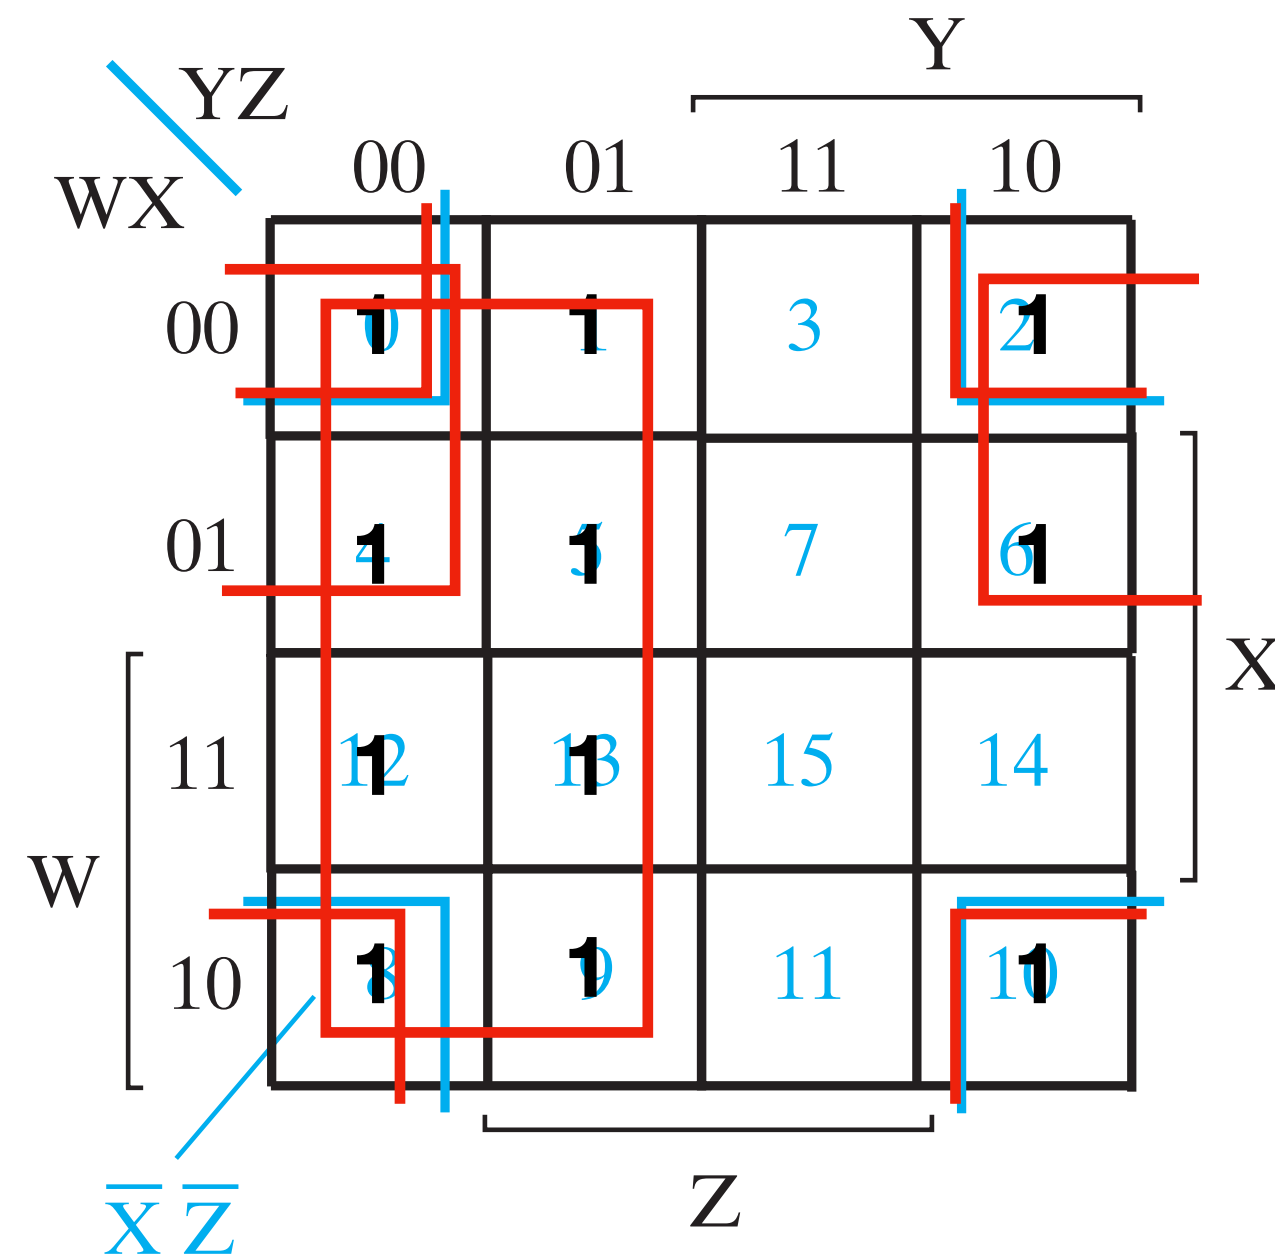


- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \Sigma m(0, 1, 2, 4, 5, 6, 8, 9, 10, 12, 13)$$

$$= \bar{Y} + \bar{X}\bar{Z} + \bar{W}\bar{Z}$$



Four Variable Maps Optimisation

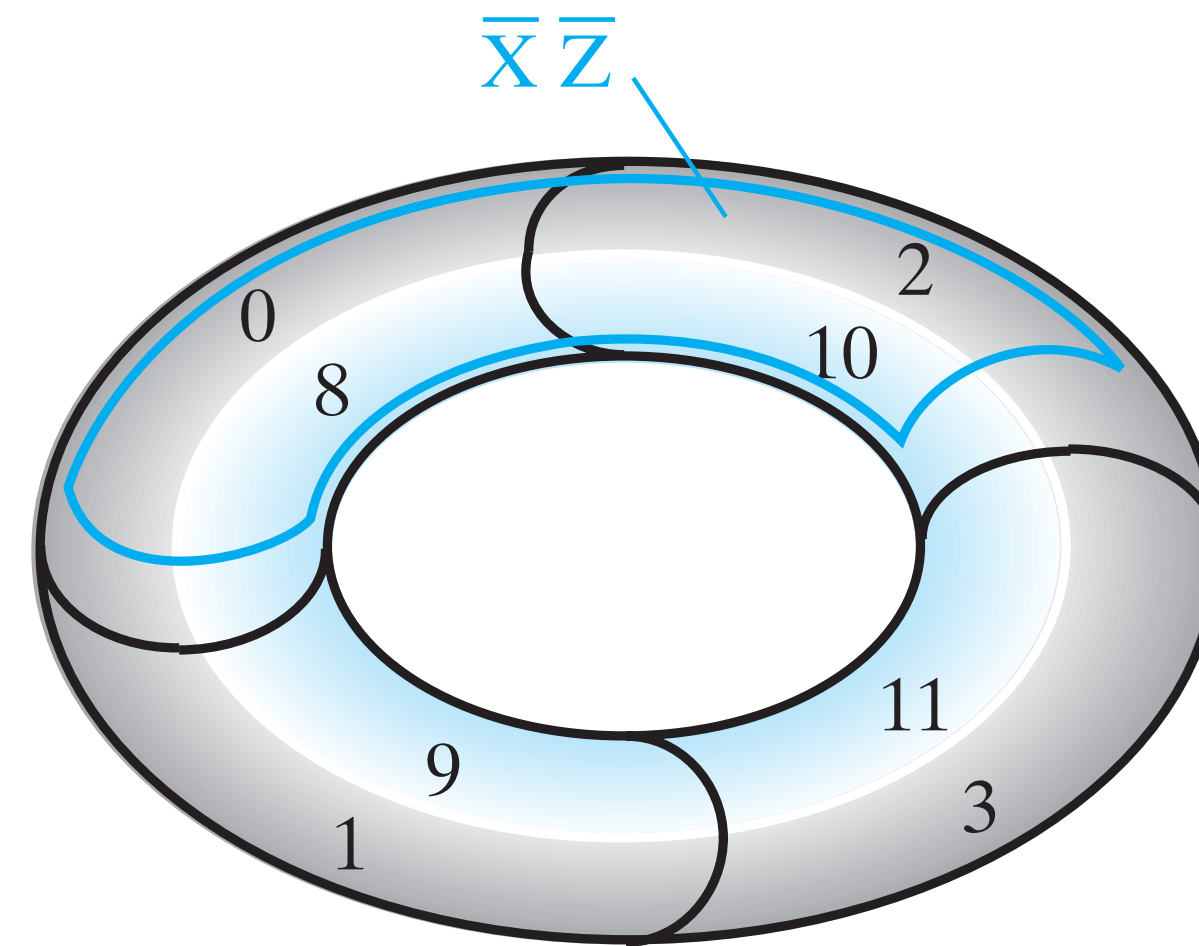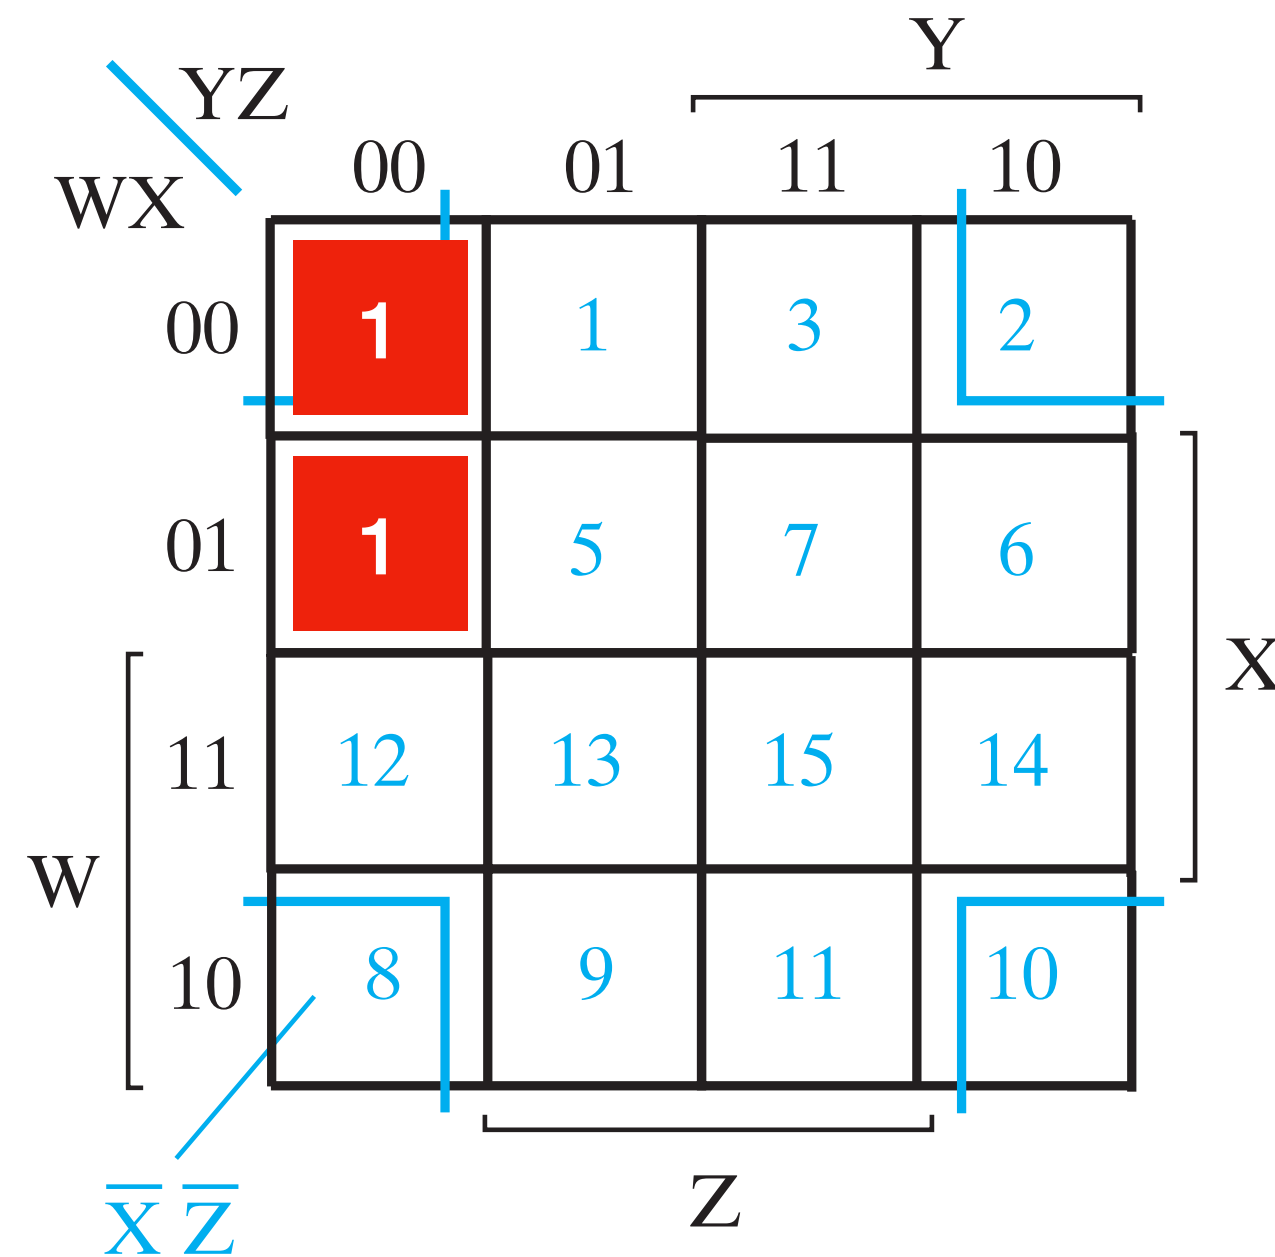

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \overline{W}\overline{Y}\overline{Z} + \overline{W}Z + \overline{X}Y + YZ + W\overline{X}\overline{Z}$$



Four Variable Maps Optimisation

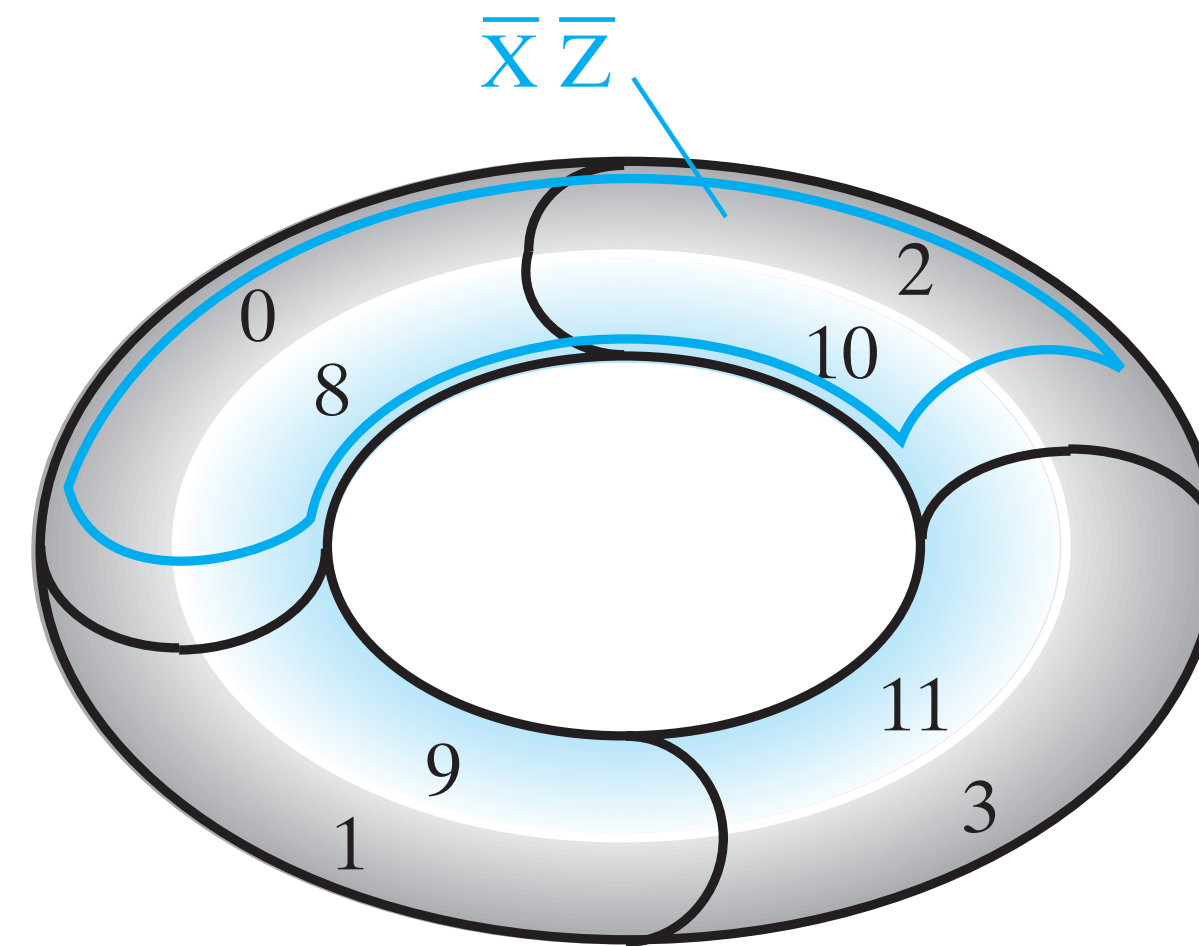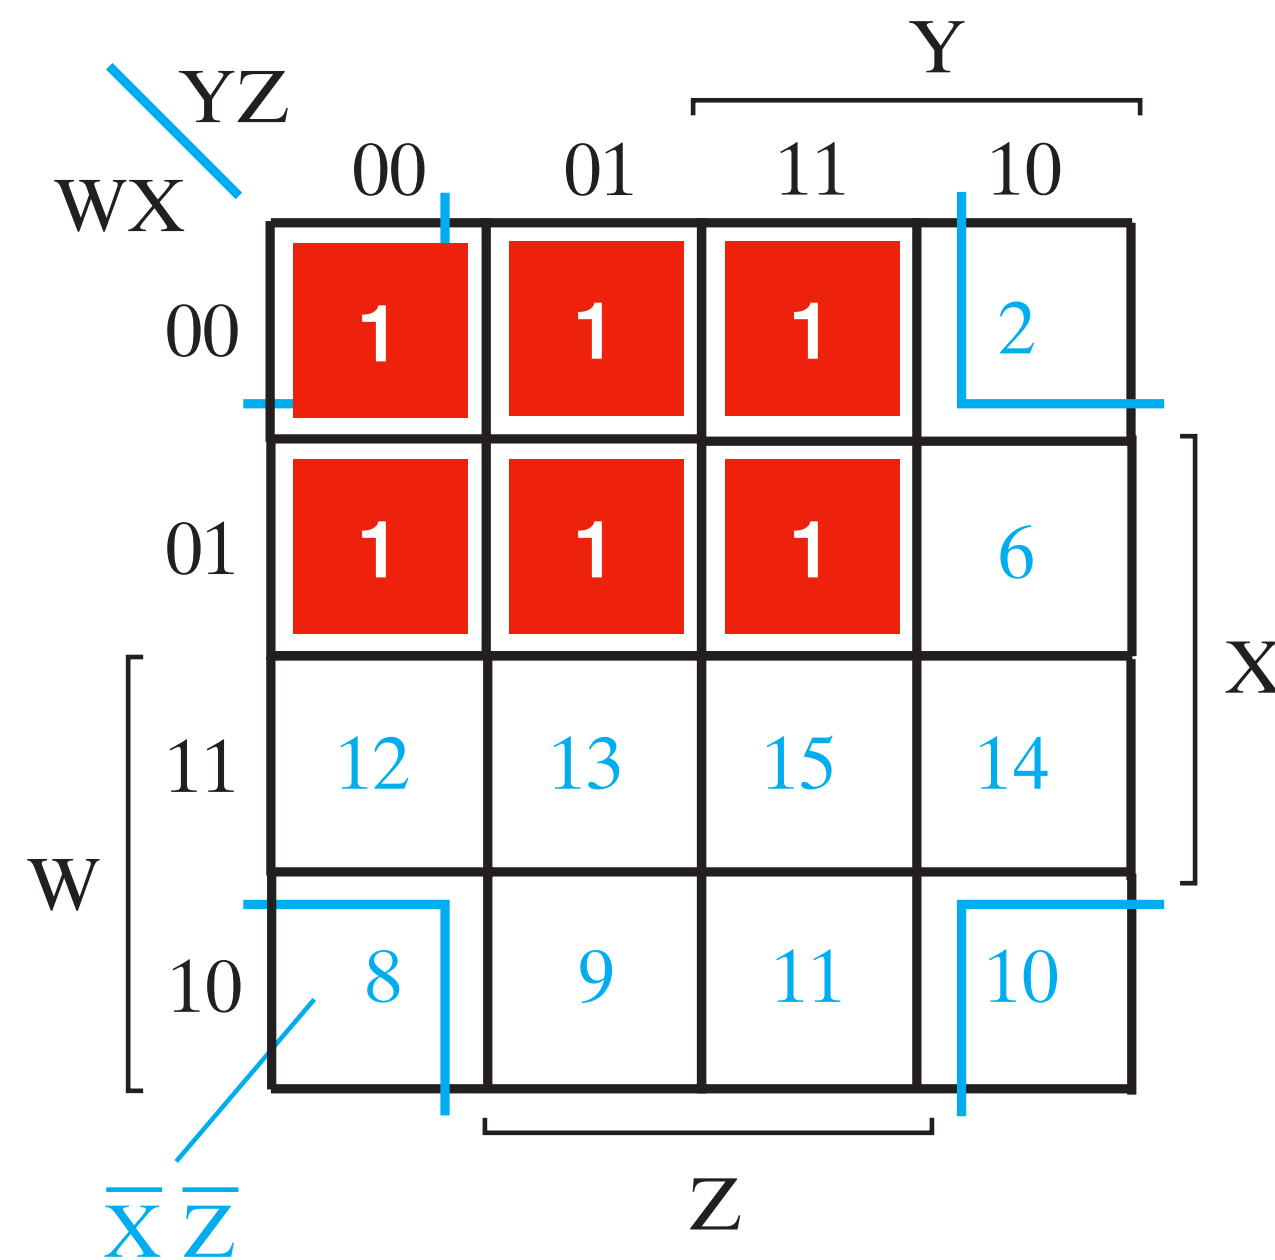

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \overline{W}\overline{Y}\overline{Z} + \overline{W}Z + \overline{X}Y + YZ + W\overline{X}\overline{Z}$$



Four Variable Maps Optimisation

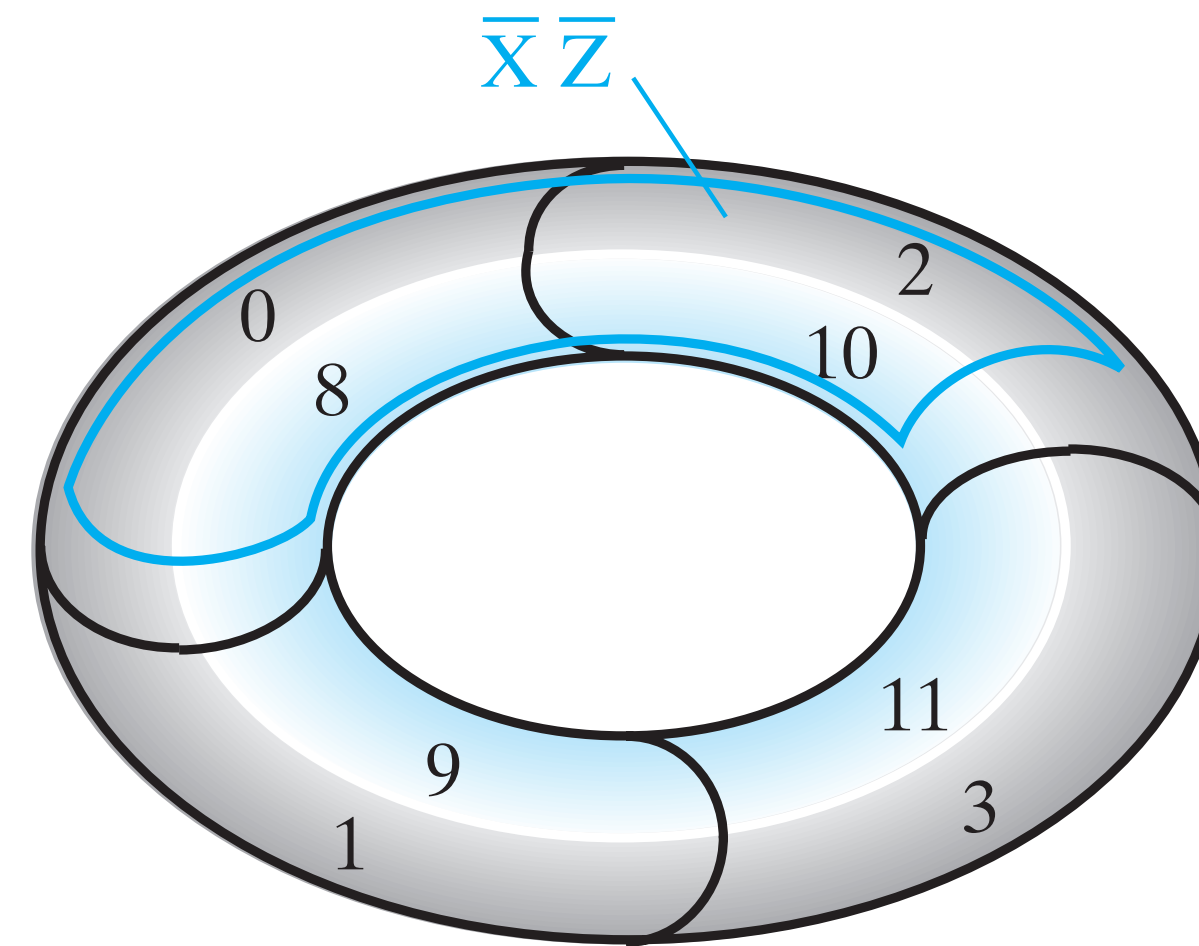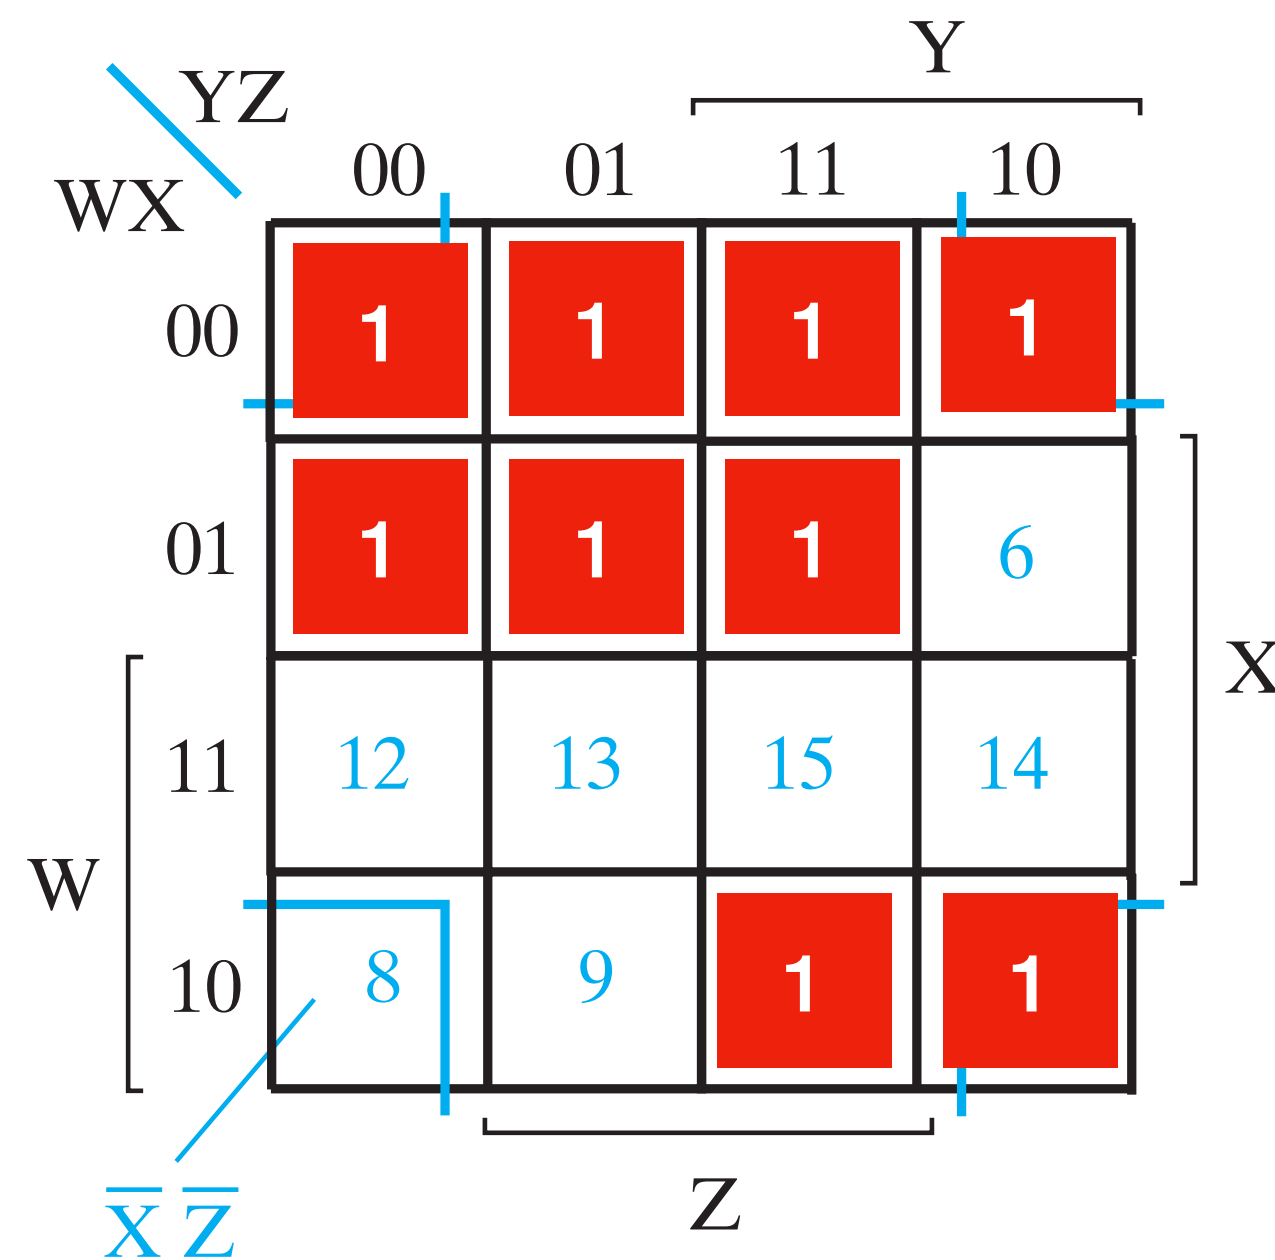

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \bar{W}\bar{Y}\bar{Z} + \bar{W}Z + \bar{X}Y + YZ + W\bar{X}\bar{Z}$$



Four Variable Maps Optimisation

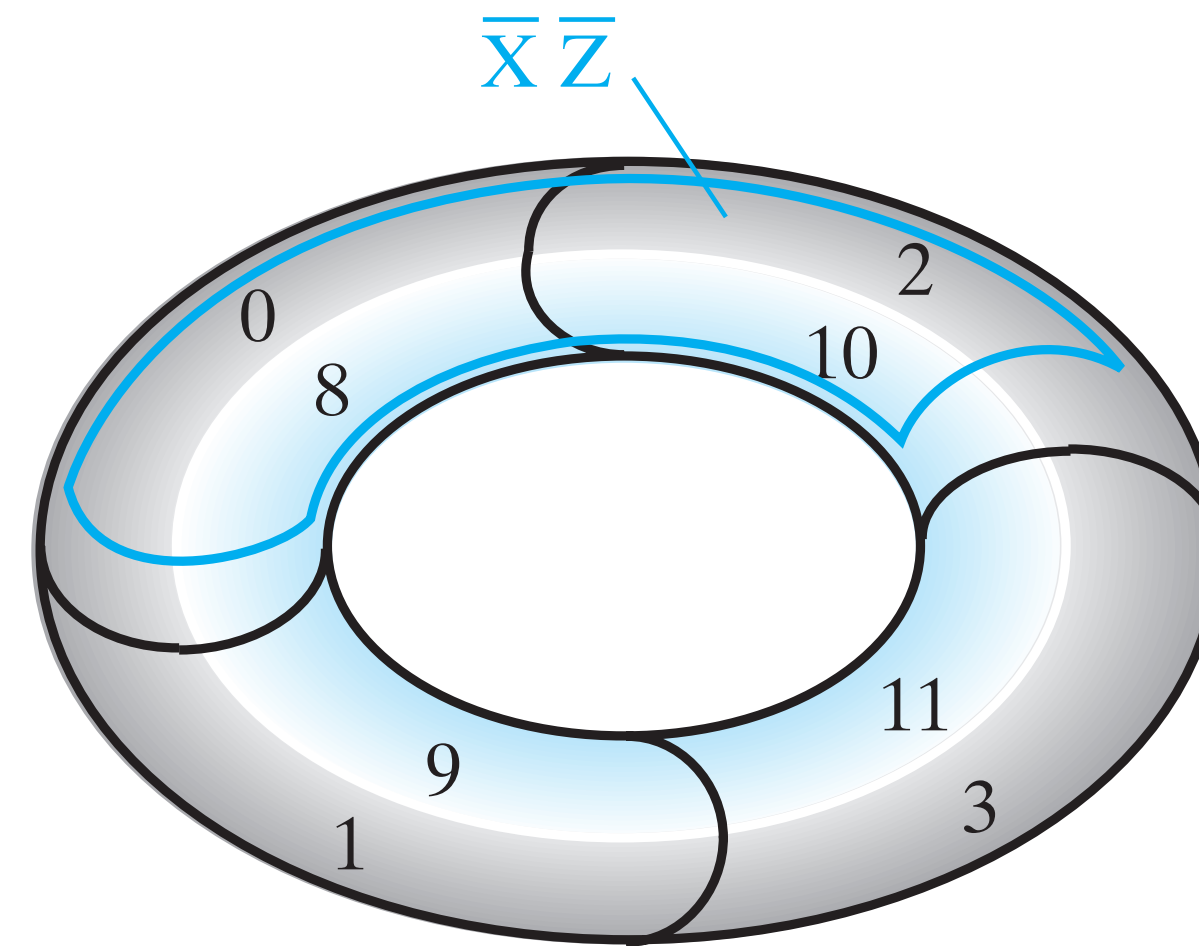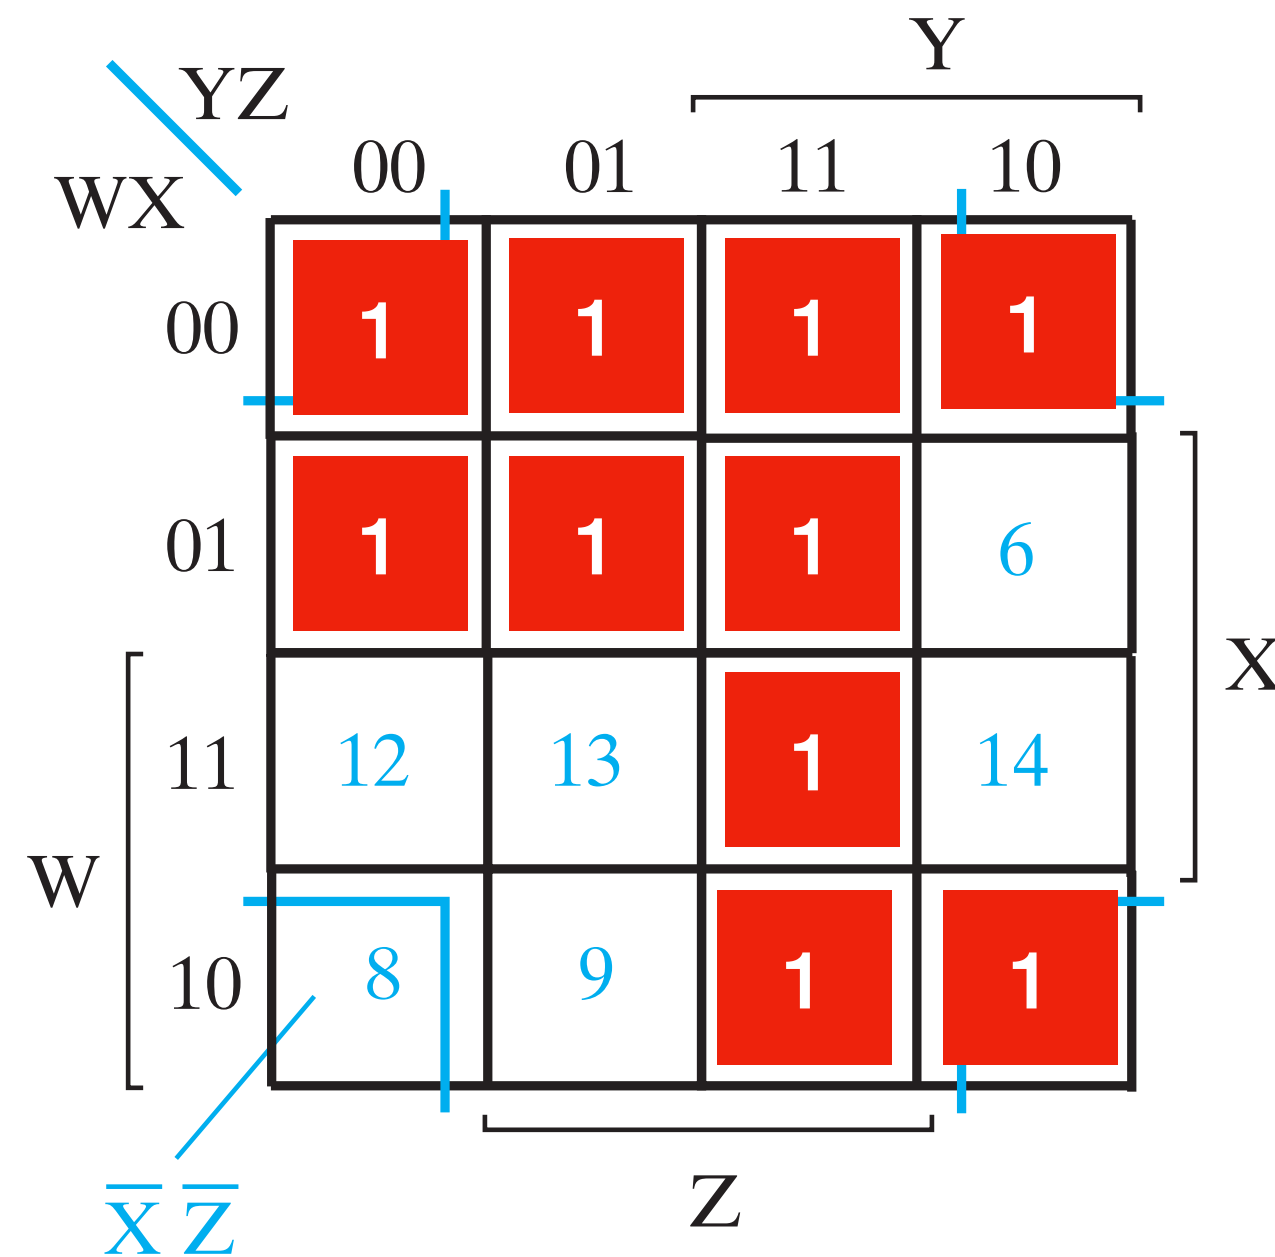

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \bar{W}\bar{Y}\bar{Z} + \bar{W}Z + \bar{X}Y + YZ + W\bar{X}\bar{Z}$$

Four Variable Maps Optimisation

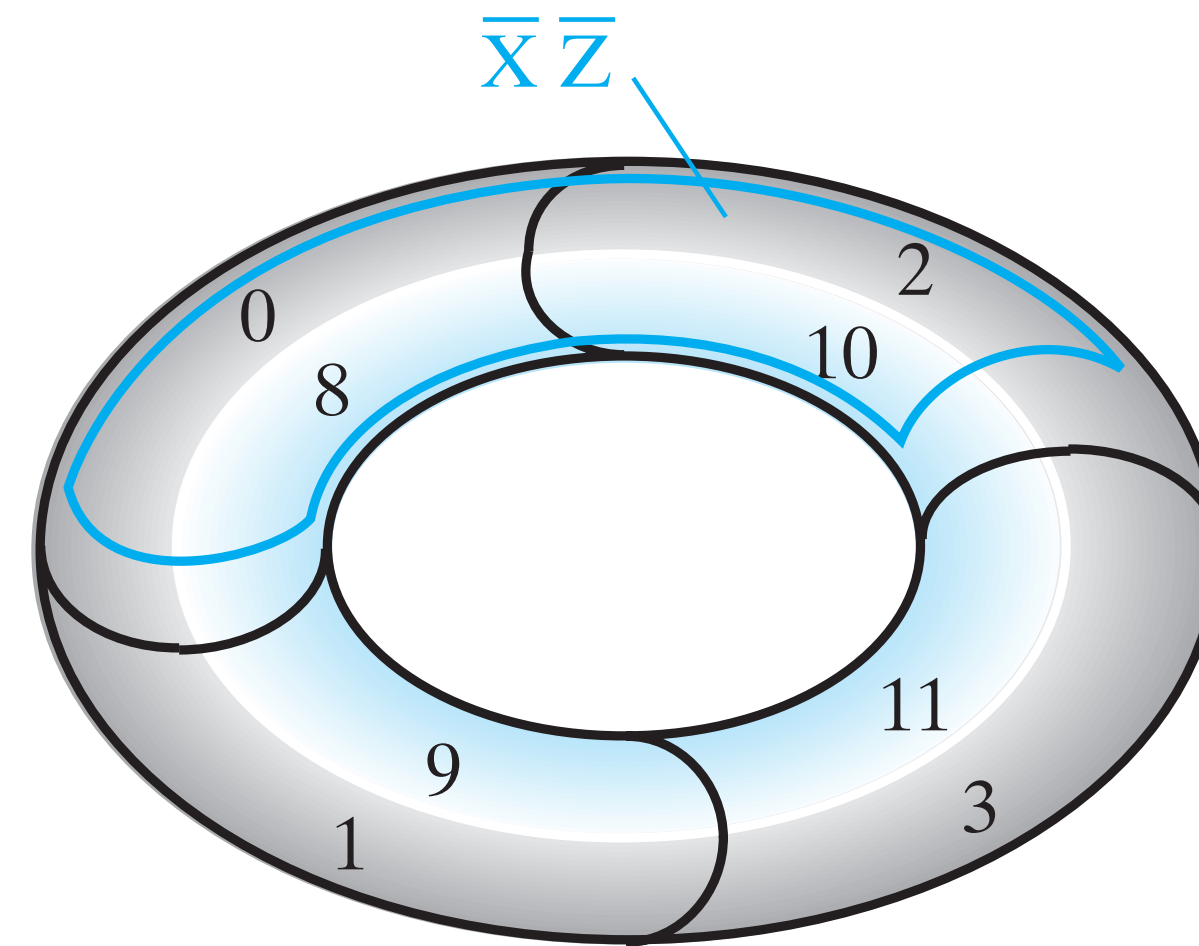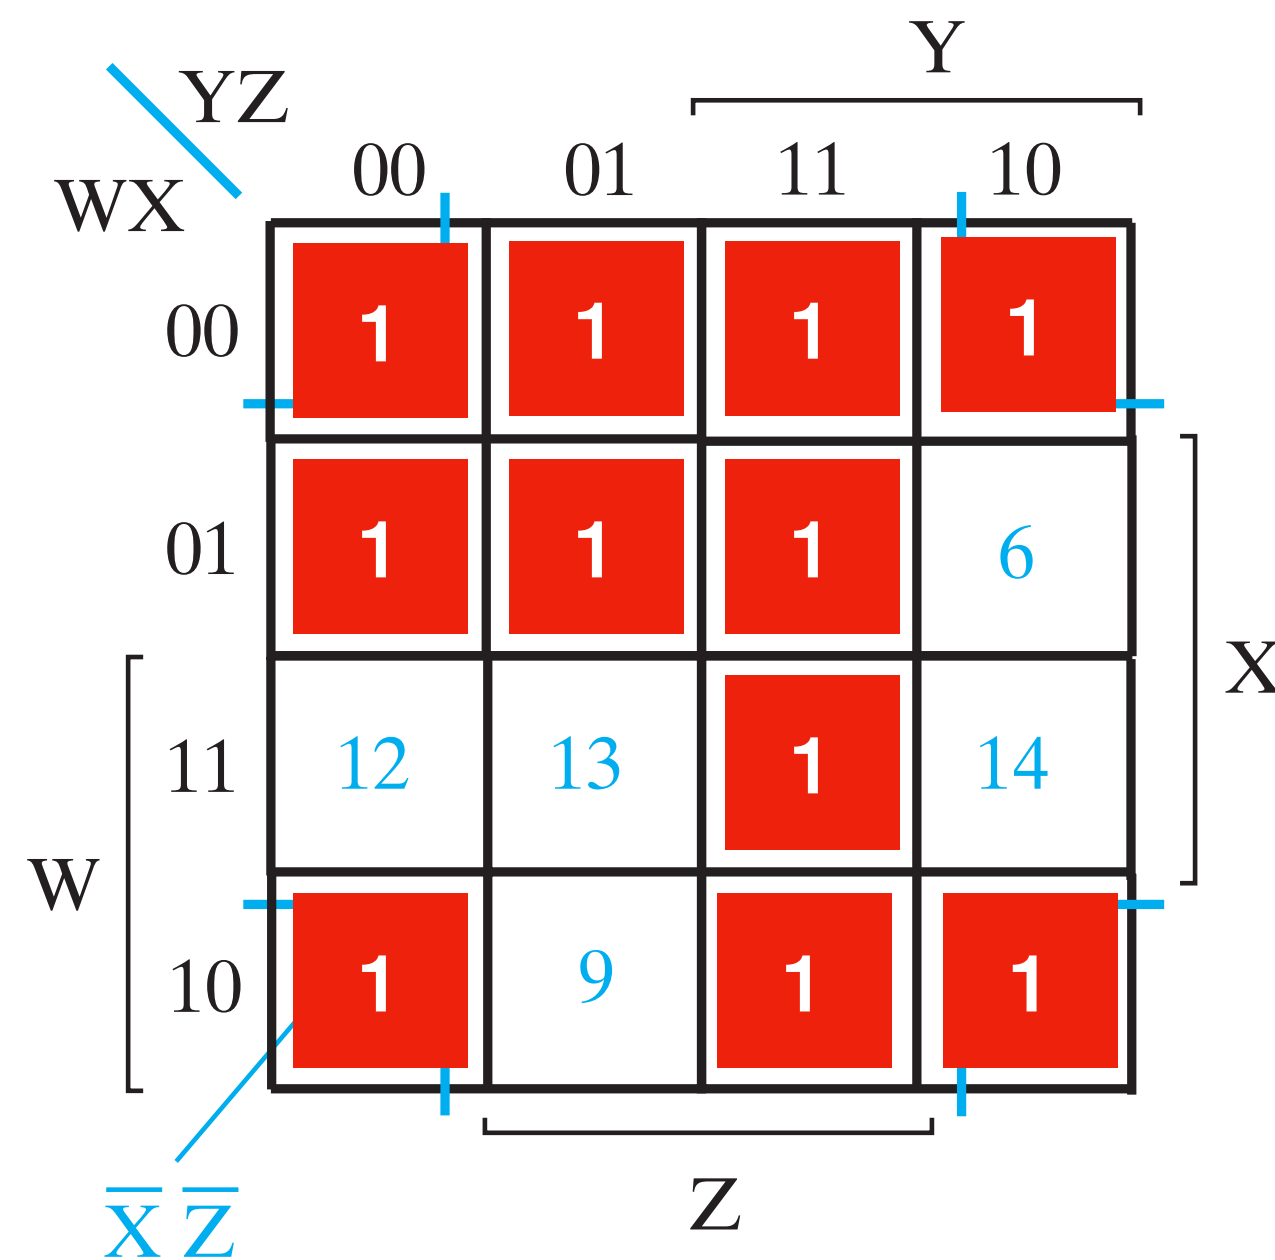

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

$$F(W, X, Y, Z) = \overline{W}\overline{Y}\overline{Z} + \overline{W}Z + \overline{X}Y + YZ + W\overline{X}\overline{Z}$$

Don't Care Condition


		Y			
		00	01	11	10
WX	00	1	1	3	2
	01	4	5	7	6
W	11	12	13	15	14
	10	8	9	11	10

YZ

X

Z

$\bar{X}\bar{Z}$

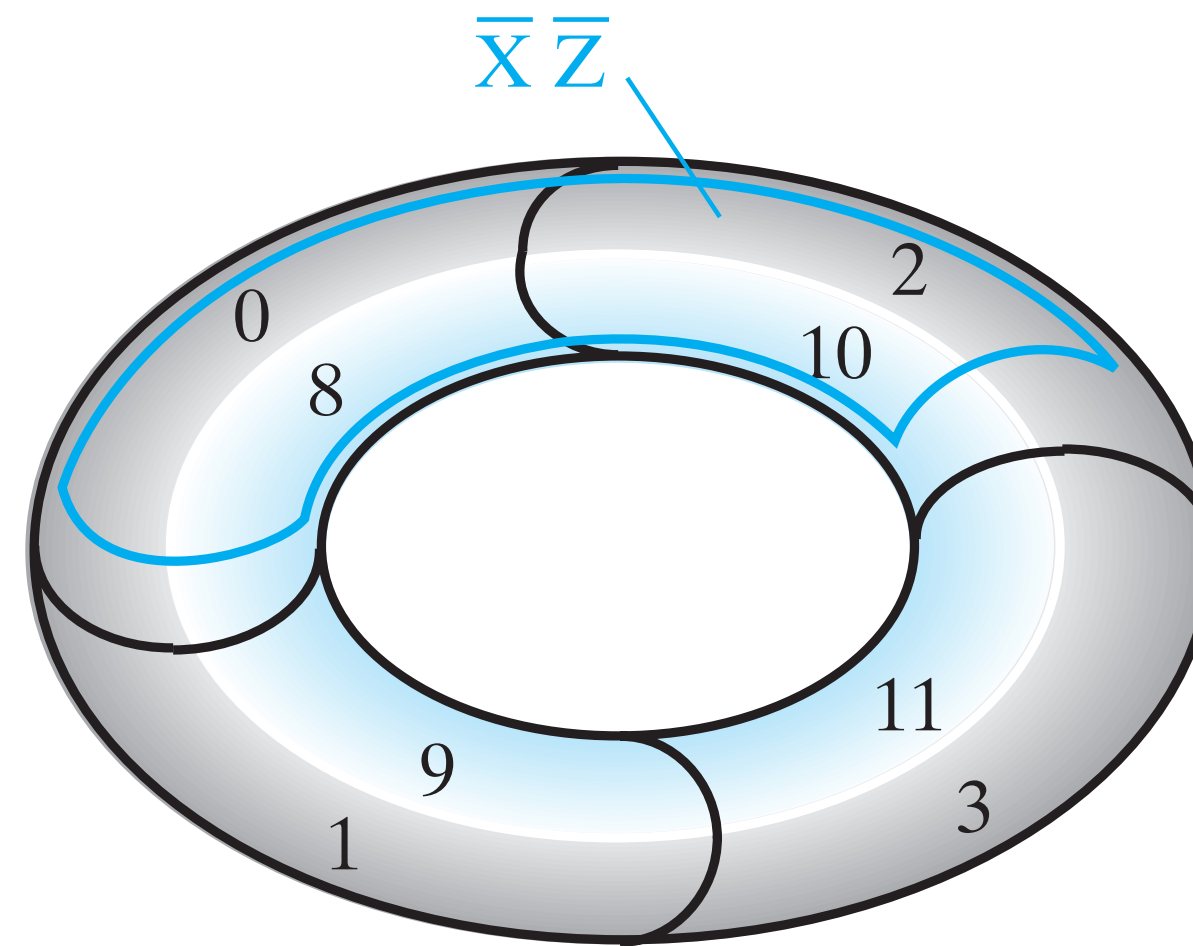


- Sometimes we don't care what the output is when the inputs are in certain combinations

Don't Care Condition

		Y			
		00	01	11	10
W	00	X	1	1	X
	01	4	X	1	6
	11	12	13	1	14
	10	8	9	1	10


YZ
WX
X
Z
 $\bar{X}\bar{Z}$

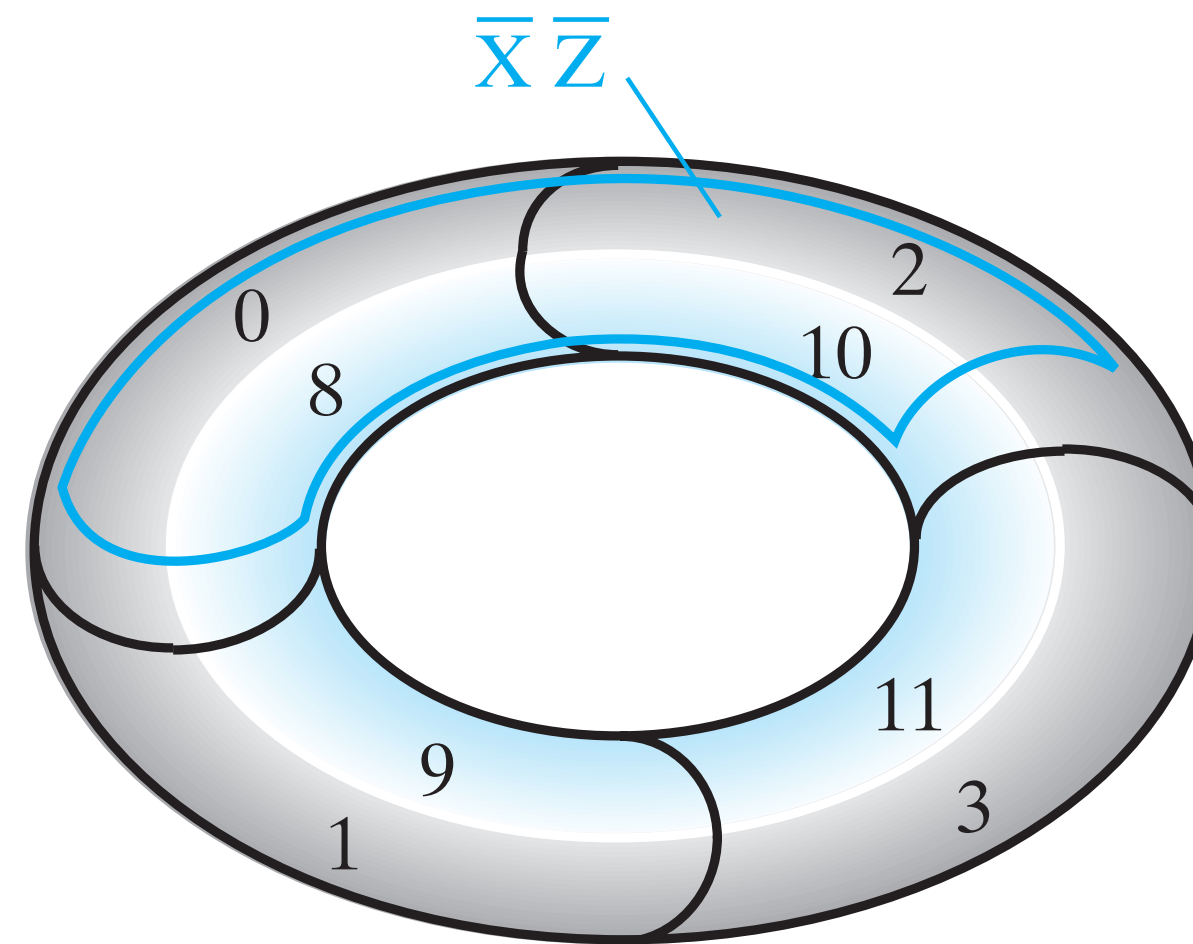

- Sometimes we don't care what the output is when the inputs are in certain combinations



Don't Care Condition

		Y			
		00	01	11	10
W	YZ				
	WX				
	00	X	1	1	X
	01	4	X	7	6
	11	12	13	15	14
	10	8	9	11	10
		Z			
		X			

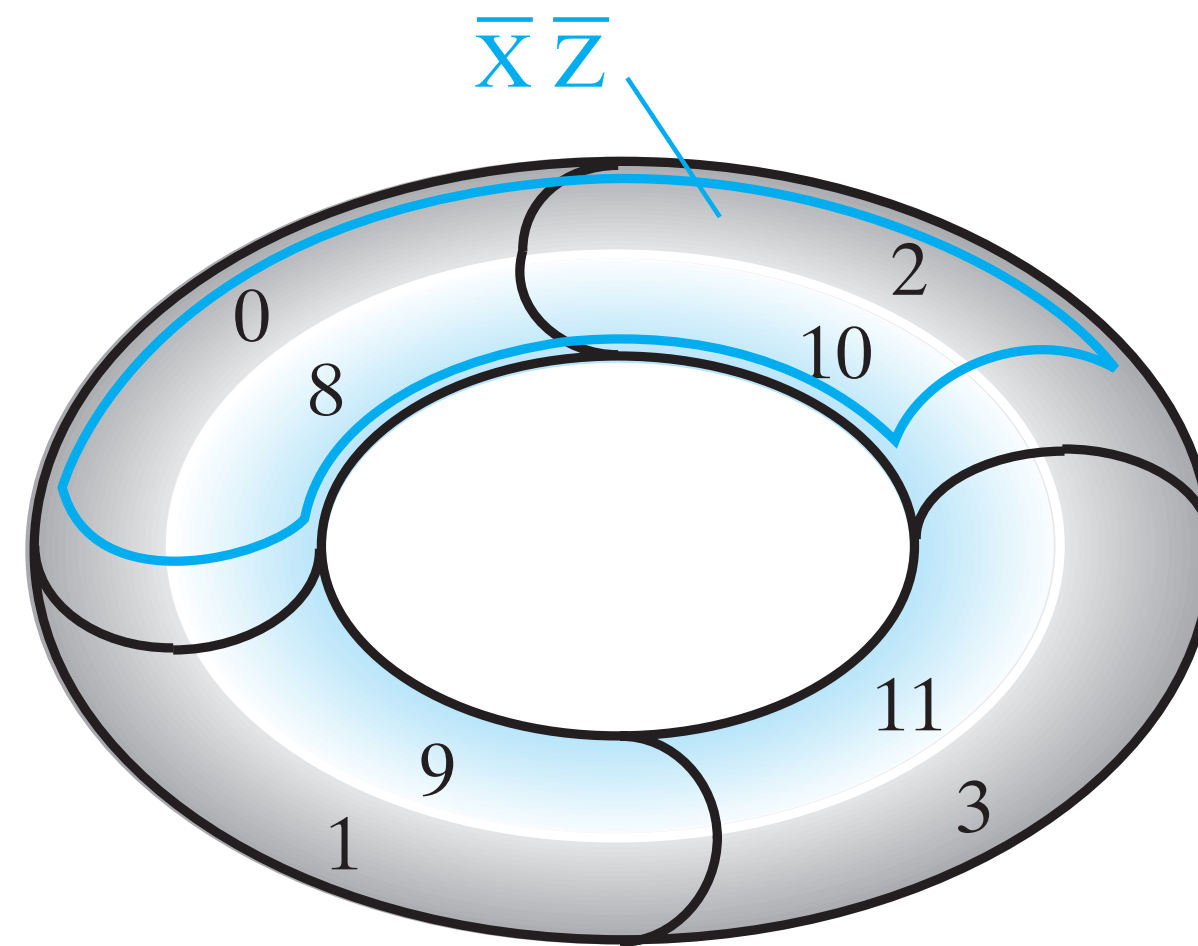

- Sometimes we don't care what the output is when the inputs are in certain combinations

Don't Care Condition

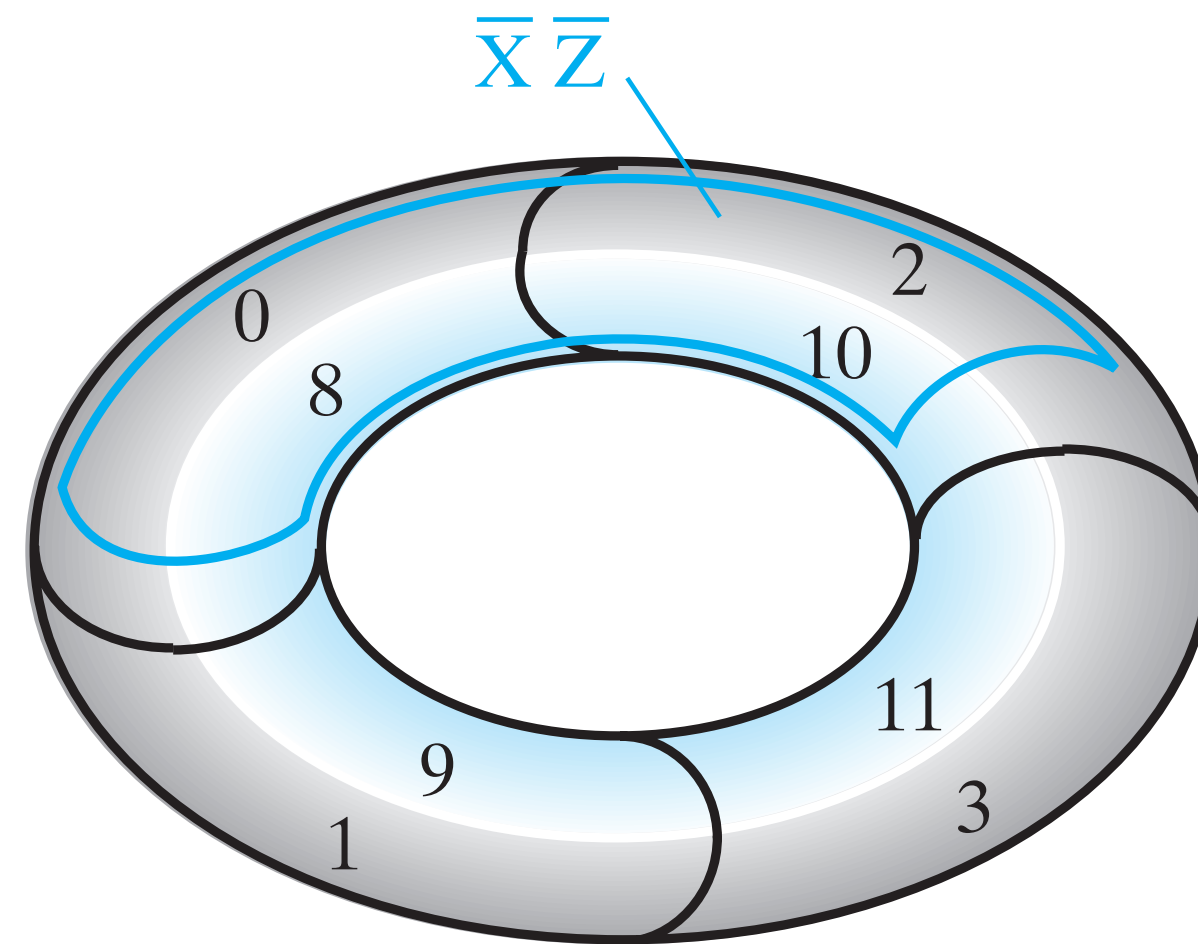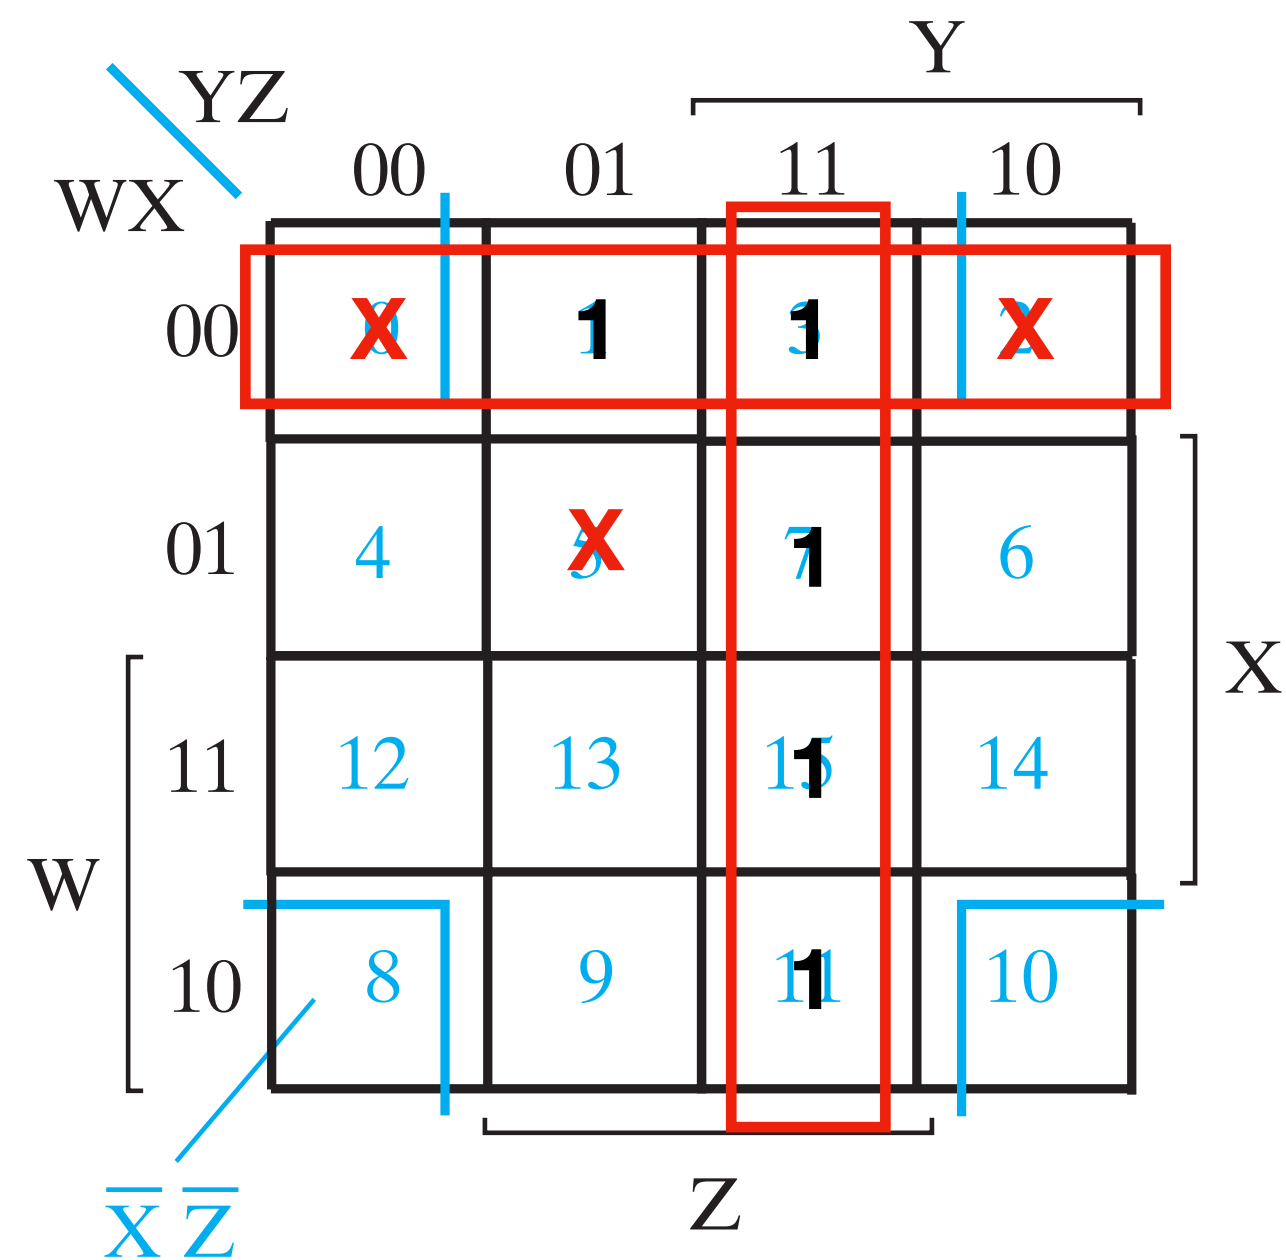


- Sometimes we don't care what the output is when the inputs are in certain combinations

$$F = YZ + \overline{W}\overline{X}$$

Don't Care Condition



		Y			
		00	01	11	10
W	00	X	1	1	X
	01	4	X	1	6
	11	12	13	1	14
	10	8	9	1	10

YZ
WX
X
Z
 $\bar{X}\bar{Z}$

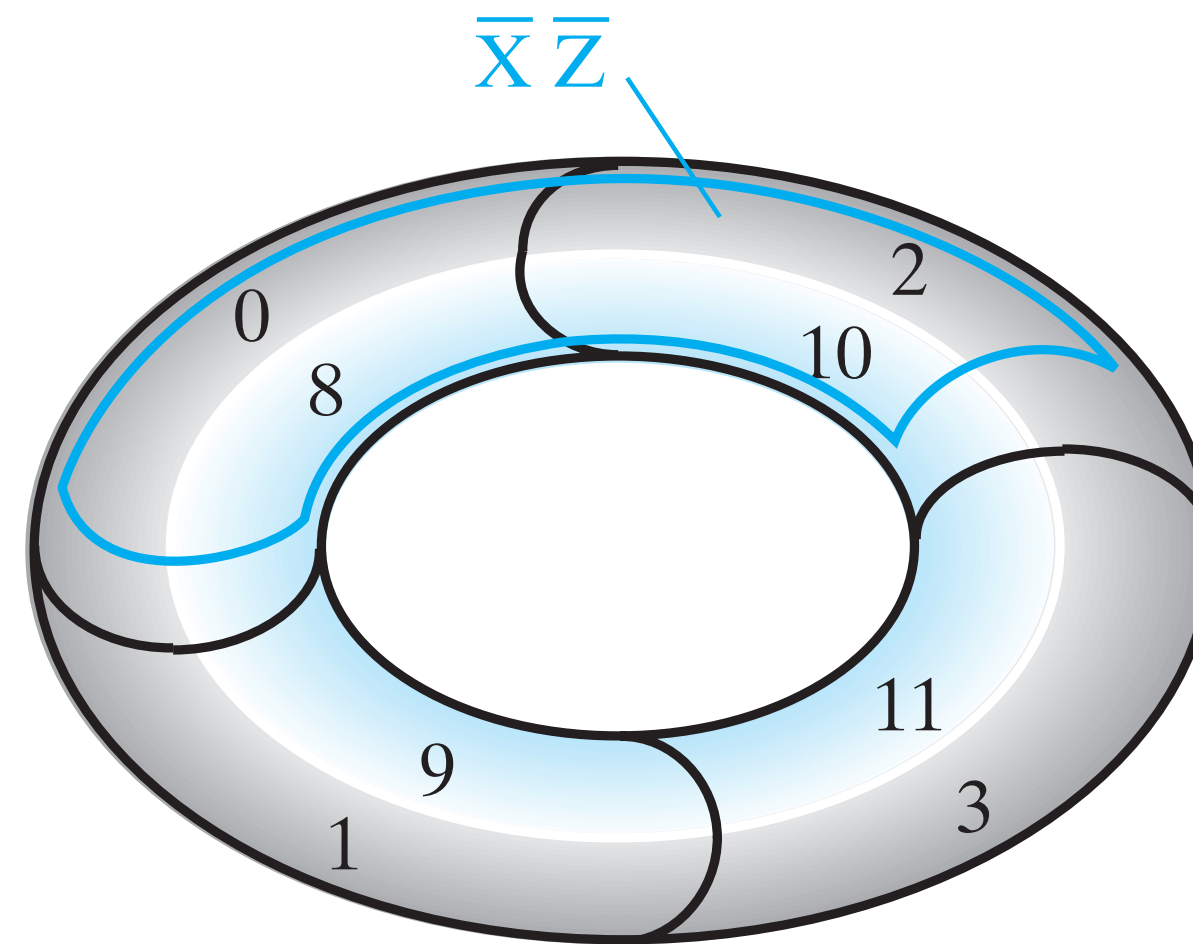



- Sometimes we don't care what the output is when the inputs are in certain combinations

Don't Care Condition

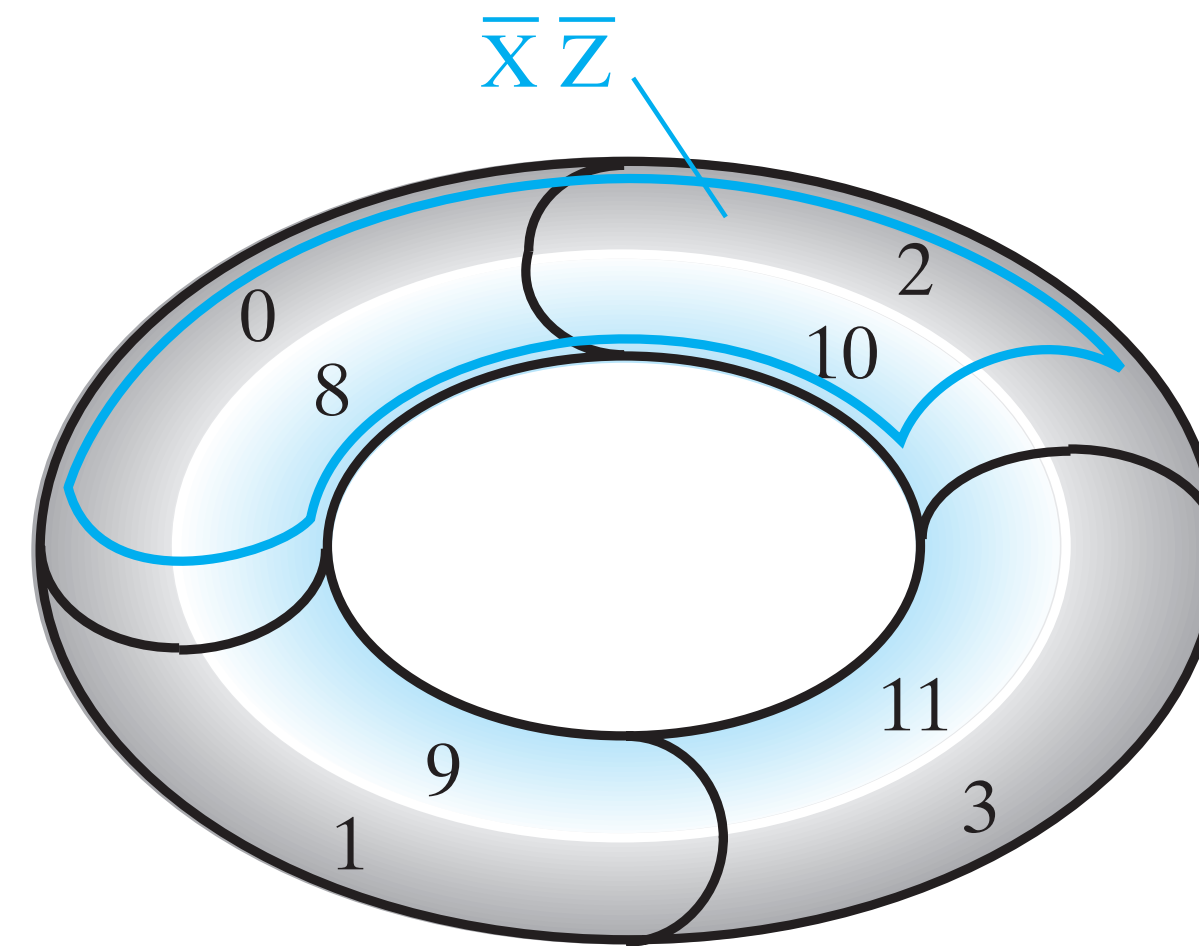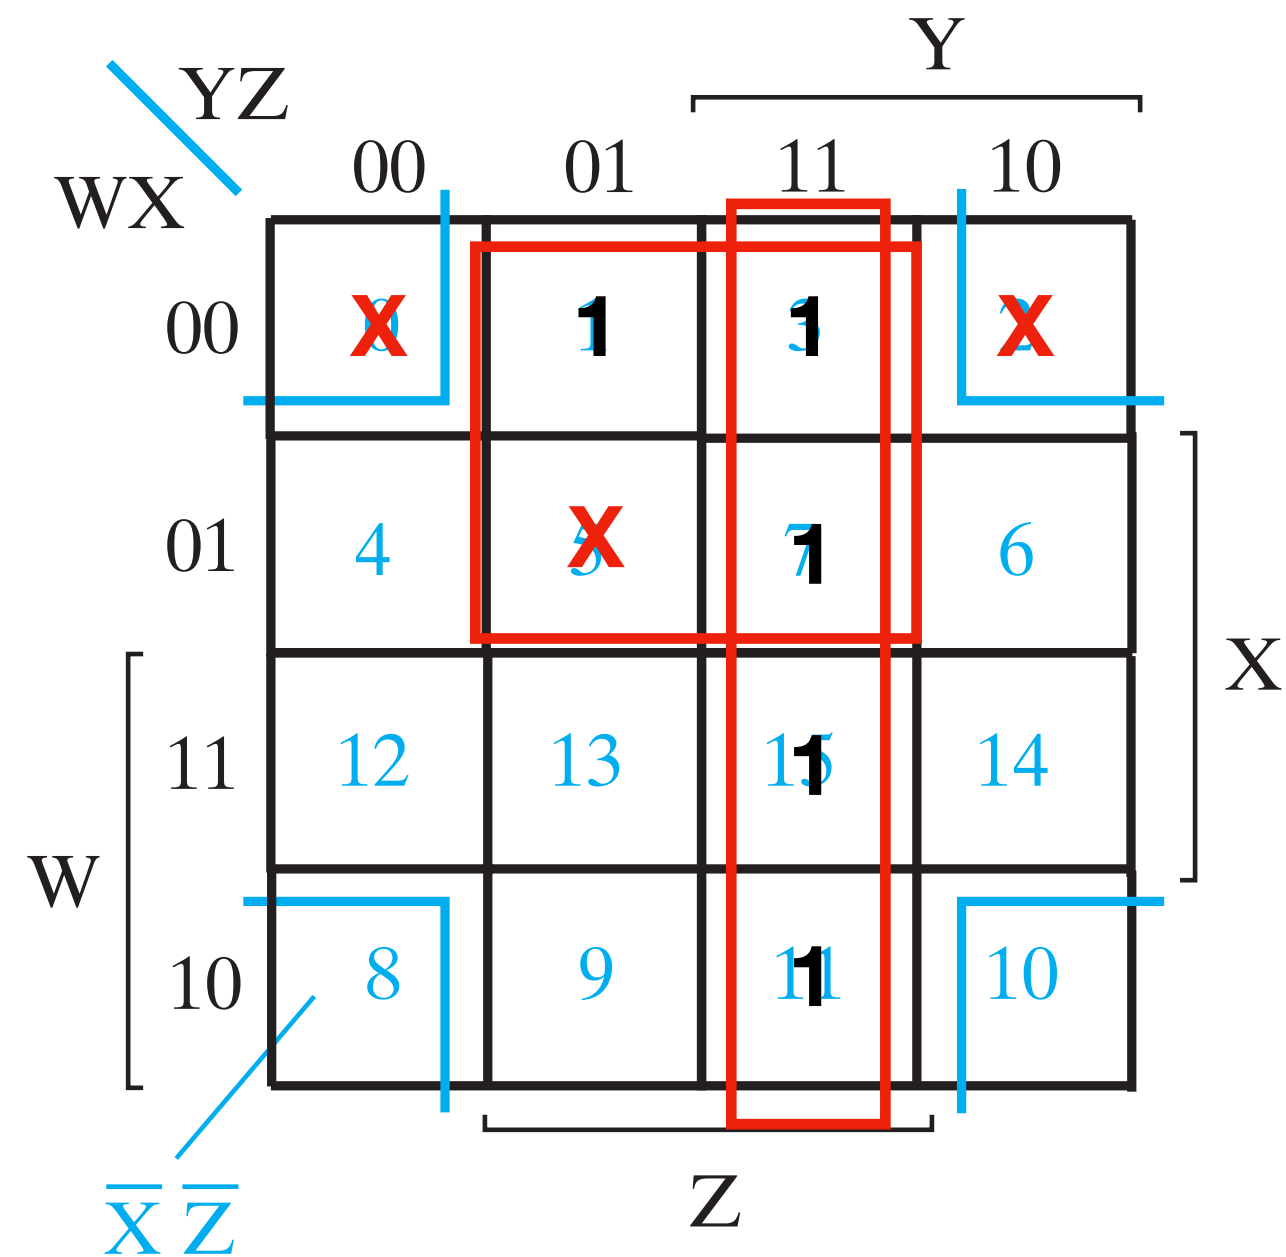

- Sometimes we don't care what the output is when the inputs are in certain combinations

Don't Care Condition

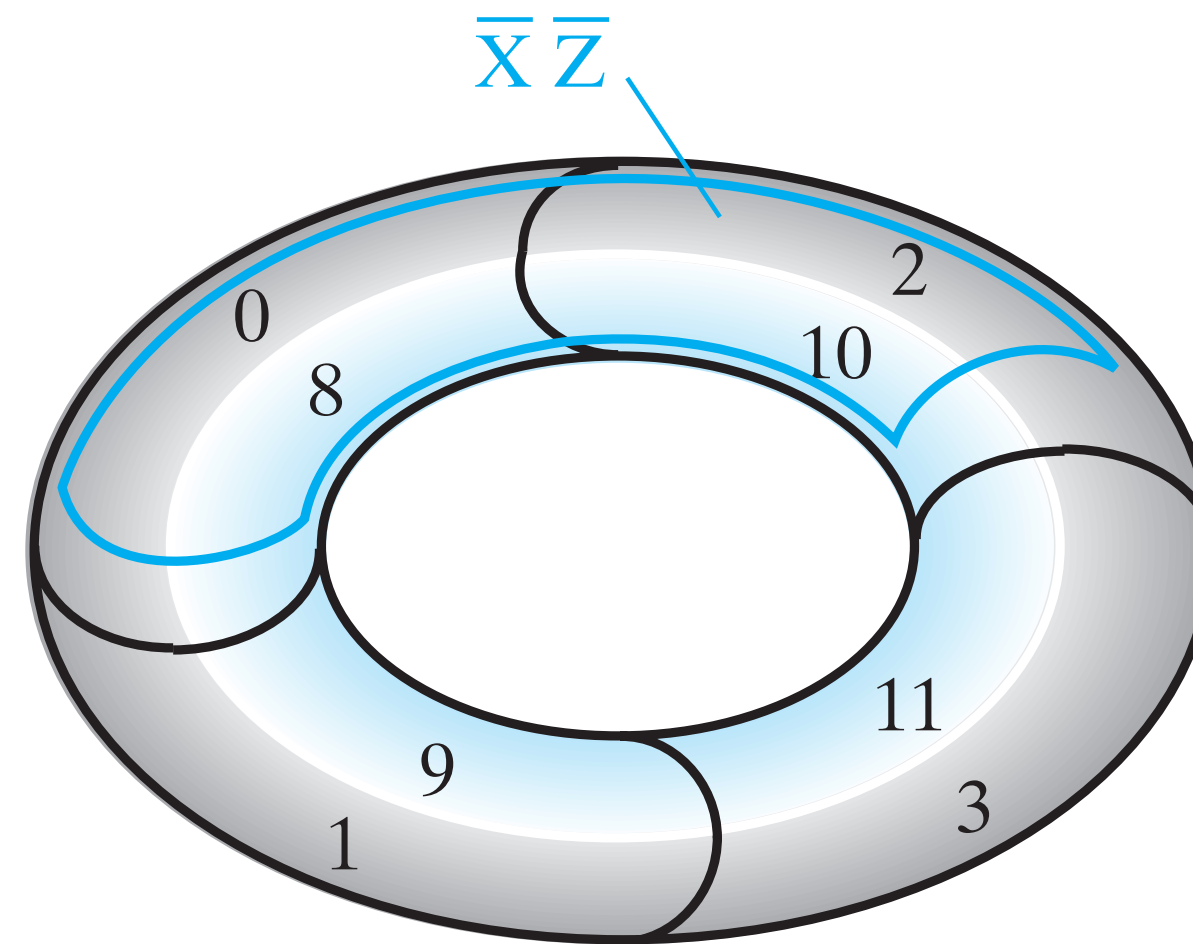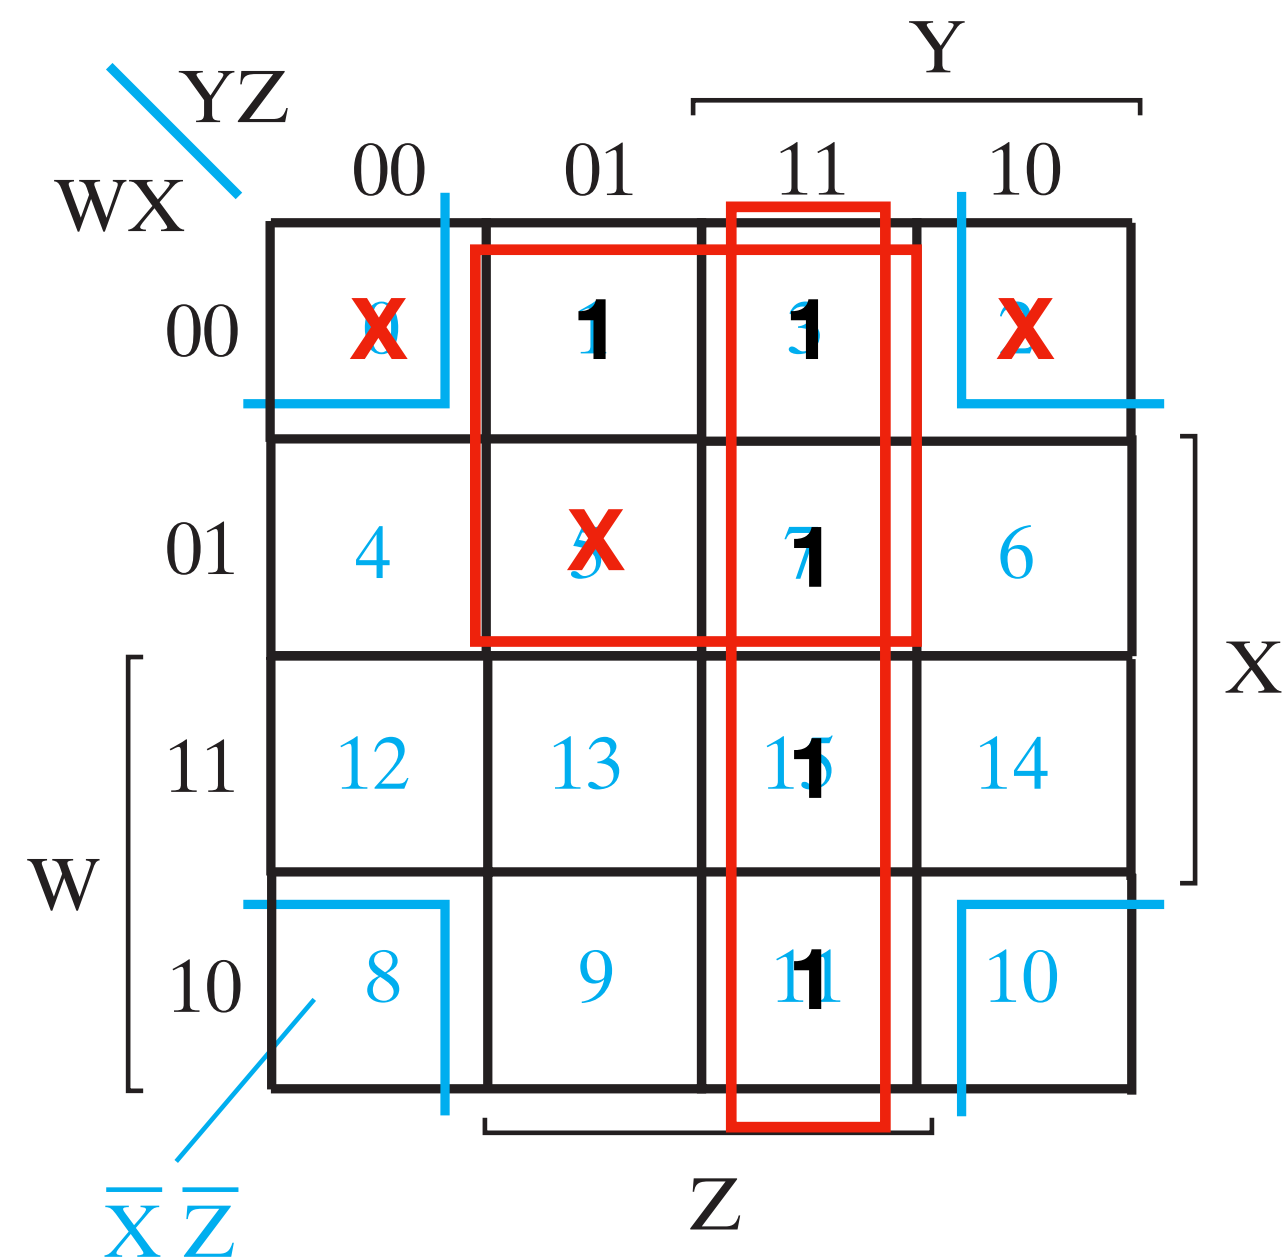

- Sometimes we don't care what the output is when the inputs are in certain combinations

$$F = YZ + \overline{W}Z$$

Summary

Summary

- Boolean Algebra III: K-Map

Summary

- Boolean Algebra III: K-Map
- Two Variable K-Map

Summary

- Boolean Algebra III: K-Map
 - Two Variable K-Map
 - Three Variable K-Map

Summary

- Boolean Algebra III: K-Map
 - Two Variable K-Map
 - Three Variable K-Map
 - Four Variable K-Map

Summary

- Boolean Algebra III: K-Map
 - Two Variable K-Map
 - Three Variable K-Map
 - Four Variable K-Map
- Don't care optimisation

Exercises

		Y			
		YZ		11	10
X	0	00	01	11	10
	1				
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 6, 7)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		00	01	11	10
X	0	1			1
	1			1	1

YZ

X

Z

$$F(X, Y, Z) = \Sigma m(0, 2, 6, 7)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		YZ		11	10
X	0	00	01	11	10
	1	00	01	11	10
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 6, 7)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		YZ		11	10
X	0	00	01	11	10
	1				
		Z			

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 4)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split


Exercises

		Y			
		YZ			
		00	01	11	10
X	0	1	1		1
	1	1			
		Z			

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 4)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

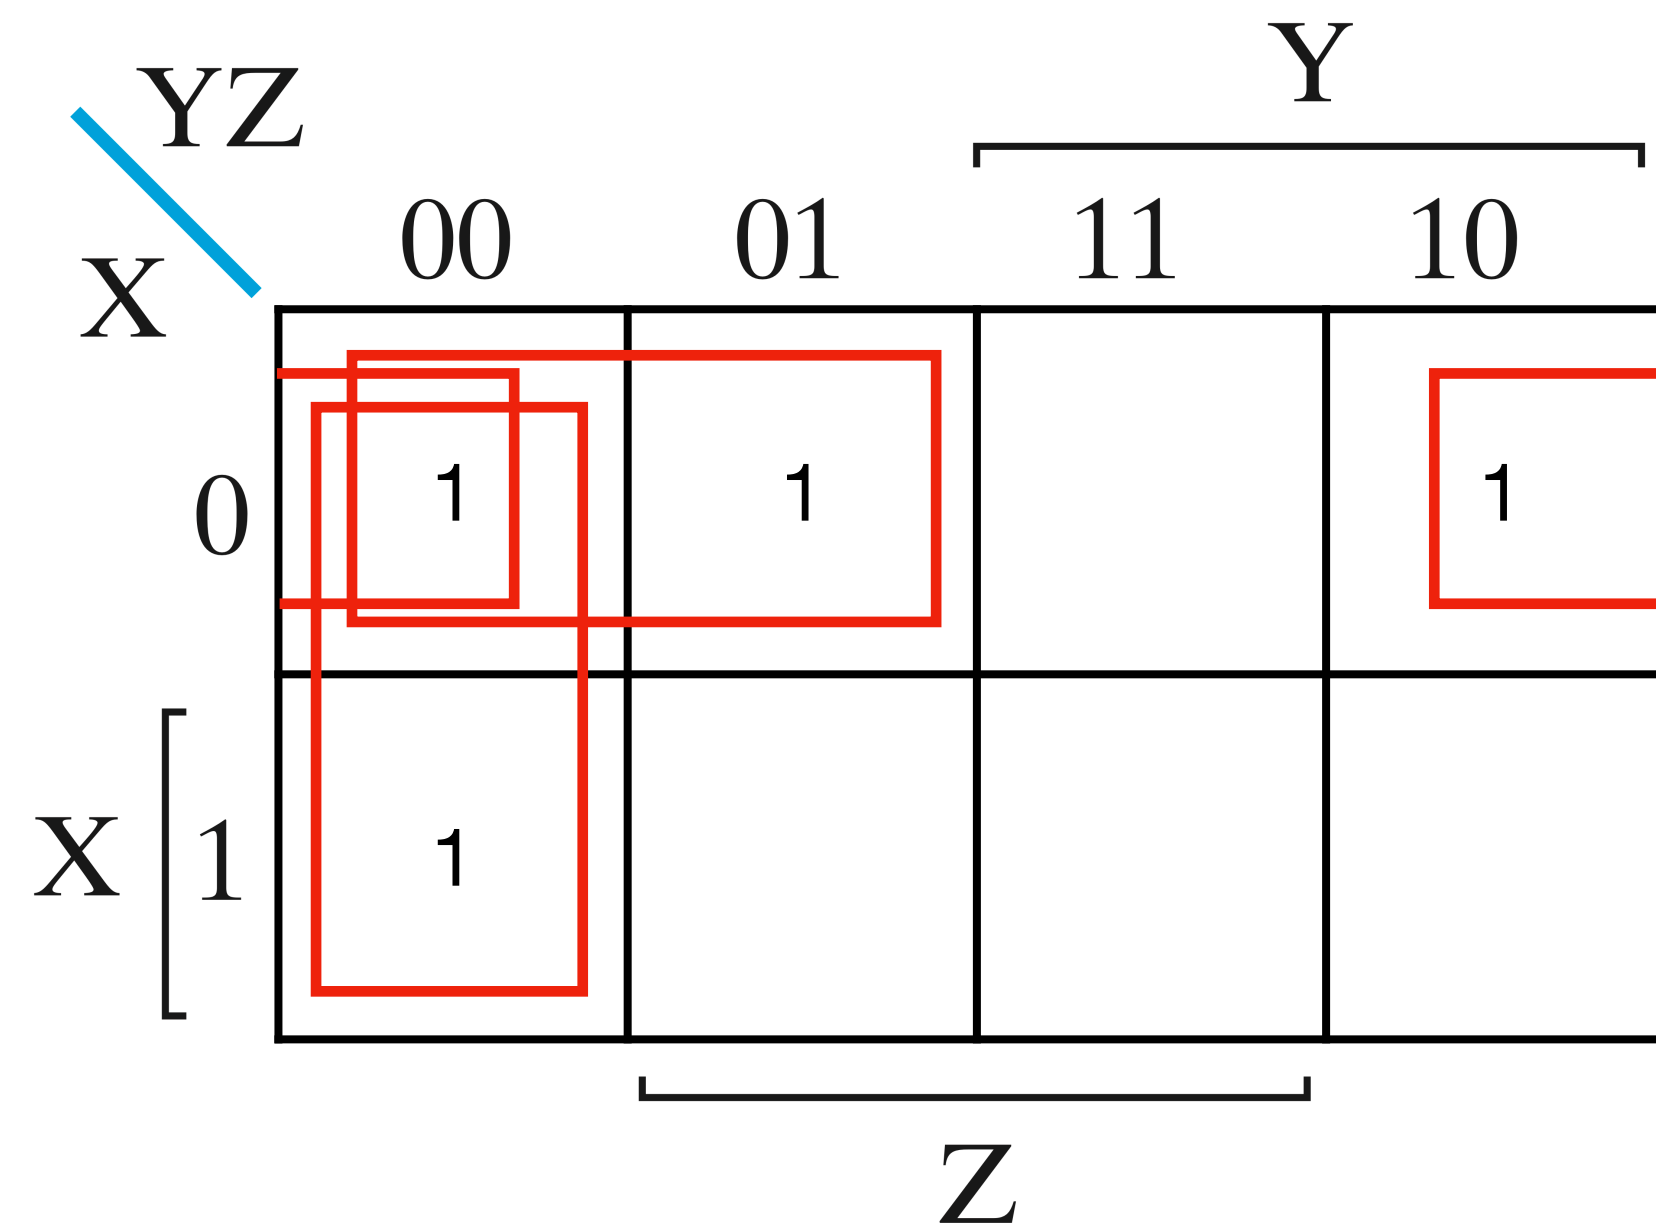

$$F(X, Y, Z) = \Sigma m(0, 1, 2, 4)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		YZ			
		00	01	11	10
X	0				
	1				
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		YZ		11	10
X	0	00	01	11	10
	1	00	01	11	10
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		YZ		11	10
X	0	00	01	11	10
	1	00	01	11	10
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

	YZ			
	00	01	11	10
X				
0				
1				
	Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 5, 7)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
		00	01	11	10
X	0	1		1	1
	1	1	1		1

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 5, 7)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split

Exercises

		Y			
YZ		00	01	11	10
X	0	1		1	1
	1	1	1		1
		Z			

$$F(X, Y, Z) = \Sigma m(0, 2, 3, 4, 5, 6)$$

- Step 1: Enter the values
- Step 2: Identify the set of largest rectangles in which all values are 1, covering all 1s
- Step 3: Read off the selected rectangles. If rectangle has odd length edges (excluding 1), split